



# Product Guide

*Featuring Artafex*

---

2024 - Volume 2





# CONTENTS

## Our Story

Brilliance Engineered .....	2
The DMF Promise .....	3
Introducing Artafex .....	4

## Our Product

Artafex 2" Lighting System .....	6
Artafex Outdoor Lighting System .....	22
Artafex 4" Lighting System .....	26
Multiples Multi-heads Lighting System .....	46
X Series Cylinder .....	50
M Series Cylinder .....	56
DRD5S Surface Mount System. ....	62
Module Comparison .....	68




# Brilliance, Engineered

DMF designs and builds industry-leading modular downlighting that sets the bar for flexibility, performance, and quality. Our in-house R&D lab is filled with brilliant engineers always at work improving our products and inventing new ones. They understand that light is more than illumination; light is what makes a space beautiful, useful, and ultimately, enjoyable.

Every DMF product delivers exceptional performance and aesthetics, while also saving you time and money year after year. That same ethos drives every part of our company, from our tireless customer service to our fast, intelligent distribution. If you want lighting that's not just built better, but built smarter, DMF is the partner for you.

The integrated driver is a great example of how our process works. With a lot of hard work, our engineers developed a driver that could be integrated into our light modules for ultimate compatibility and space efficiency. The result is enhanced quality of light - reliably delivered - without sacrificing performance, ease of installation, or serviceability.

Learn more at [dmfLuxury.com](https://dmfLuxury.com)

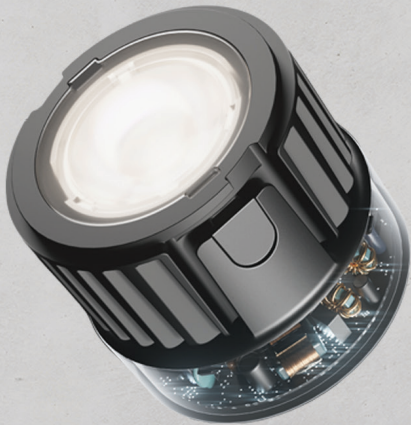

## Our Promise

The award-winning all-new Artafex downlights are designed for and are only available through custom integrators. We believe these products provide the best solution for your lighting projects and are so confident that we are pledging The DMF Promise – Guaranteed Reliability, Guaranteed Compatibility, and Guaranteed Support.

DMF Lighting is one of the first companies to advocate for custom integrators to adopt light fixtures as part of their business model and is a recognized leader in the industry. The DMF Promise is a natural extension of our commitment to you.



### 10-Year Guarantee

We are proud to provide outstanding products and solutions that are tested with the most rigorous engineering protocols. That's why we're extending our warranty to an industry-best 10 years. This warranty supports our commitment to delivering downlights with superior quality, performance, and dependability.



### Dimming Compatibility

Our integrated driver was designed in-house to ensure compatibility with every popular control system specified by our customers. We guarantee our products to be seamlessly compatible with every major lighting control system, local and centralized.



### Direct Tech Support

In addition to our existing customer service number for general inquiries, you can directly contact a DMF engineer for technical questions. Not a customer service rep or an outsourced technical support center. You can connect with one of our in-house engineers in our Los Angeles office.



Introducing

# Artafex

A DMF exclusive line of award-winning lighting products, designed to meet the demands of modern custom integrators and elevate their projects to a new level of elegance and style. Showcasing a seamless blend of form and function, Artafex sets a new standard for luxury and versatility and is available exclusively for custom integrators who demand the finest in lighting innovation.



---

## True Spectrum™

The culmination of studying 99 variations of color to create light engines that are exceptional in their ability to effectively display colors as they appear under natural light. Artafex modules feature True Spectrum™ high CRI LED technology.

## Premium Trim Selections

Stunning trims machined from solid blocks of aluminum or brass provide elegance, durability, and a low-glare finish.

## Simplified Flangeless Housings

Dedicated flangeless housings can be installed using conventional drywall taping techniques to achieve a Level 5 finish.








Clean and Quiet Ceilings,  
Now for the Whole Home

Artafex 2" small aperture lighting system is designed to elevate the entire home with modern, quiet ceilings and award-winning design. The traditional constraints of 2" fixtures are finally gone. Now, small aperture lighting isn't just a specialty feature, it's been designed for every room in the house.





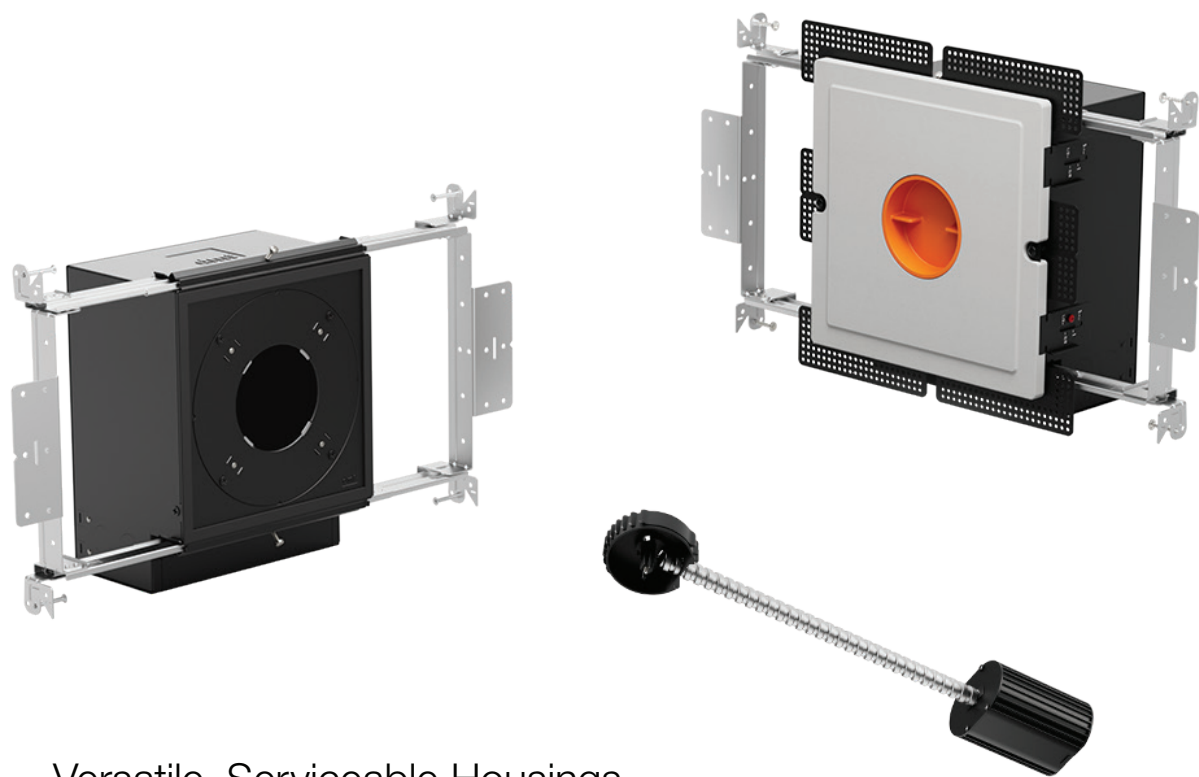

## Versatile, Serviceable Housings

The simple universal housing not only accommodates a fixed or adjustable module, it also features a remarkably small footprint without sacrificing strong light output. The housing's unique pull-down latch makes serviceability simple since the splice and driver are both easily accessible below the ceiling.

## The Quiet Revolution is Here

The revolutionary Artafex 2" small aperture modules go smaller without compromise, combining True Spectrum™ and the performance of larger fixtures with the design of small aperture fixtures for a quiet ceiling. They deliver up to 1250 lm and are completely interchangeable. Swap lumens, color temperature, or optics all from below the ceiling.



## The Key to Innovation

A true breakthrough in the category, our patent-pending Precision Lock Collar eliminates over-cutting and ensures a flawless cutout, and error-free installation at a uniform depth.

## A Retrofit Solution

Retrofit Conversion Kits provide an elegant solution to convert preexisting 6", 5" or 4" fixtures into a 2" downlight with a variety of trim options. The advantages of beautiful lighting just became a lot more obtainable for everyone.



## 2" Trims

All 2" trim options are meticulously engineered in California to provide unmatched precision and exceptionally easy installation. Every element of these small aperture options is designed to complement or disappear into any space, creating a modern, quiet atmosphere throughout the home.


### Artafex Premium Trims



Round Micro Flange  
Anodized Silver Aluminum



Round Flangeless  
Satin Brushed Brass

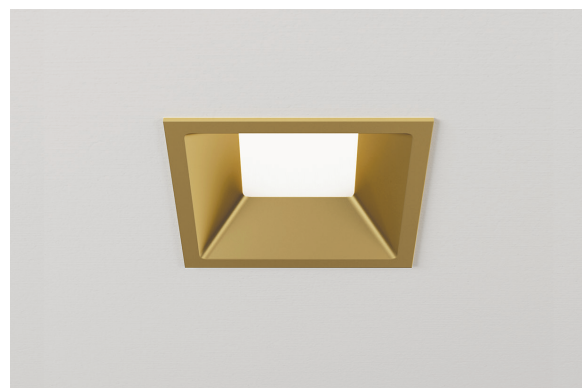


Square Micro Flange  
Satin Brushed Brass



Square Flangeless  
Anodized Silver Aluminum

## Standard Trims

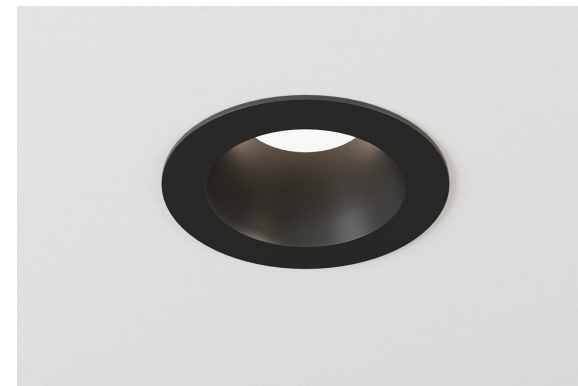


Round  
The classic Standard trim shape that complements any project.



Square  
A modern look that's expertly die cast with sharp edges and precise corners.



Micro Flange  
Ultra thin flange and wider recess provide a crisp, minimal appearance.

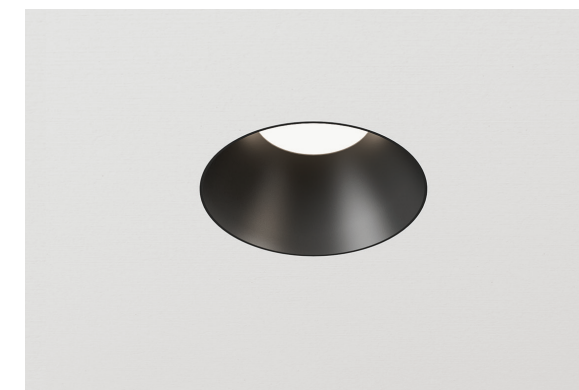

Flangeless  
Use with flangeless wood application or low-profile mud flange.



Wall Wash  
Perfect for delivering broad, consistent light across a wall surface with an unobtrusive design.



Decorative  
Features finely crafted acrylic that delivers a subtle, radiant glow.





# Artafex

2" Downlight

PRODUCT SPECS




- Delivers the ultimate in quiet ceiling designs
- Eliminates over-cutting and ensures perfect cutout
- Deep die-cast aluminum trim provide unmatched precision and exceptionally easy installation
- In-house designed integrated driver ensures seamless compatibility with every major lighting control system

<b>Application</b> New Construction, Remodel, Retrofit	<b>Aperture</b> 2"	<b>Input Voltage</b> 120/277V
<b>Compatible Housings</b> Artafex Flangeless, X Series	<b>Color Quality</b> True Spectrum™	<b>Ceiling Material</b> Drywall, Millwork
<b>Delivered Lumens</b> 750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W)	<b>Dimming</b> TRIAC/ELV (1%, 120V only), DALI-2 (0.1%)	<b>Ceiling Thickness</b> New Construction: 1/2" up to 1 1/4" Remodel: 5/8" up to 1 1/4"
<b>Color Temperatures</b> <div><div>2700K</div><div>3000K</div><div>3500K</div><div>4000K</div><div>Warm Dim, 3000–1800K</div><div>Tunable White, 4000–1800K</div></div>		<b>Beam Spread</b> <div><div>20° Narrow Spot</div><div>30° Spot</div><div>40° Flood</div><div>50° Wide Flood</div><div>50° x30° Linear Spread</div></div>
<b>Standards</b> <div><div>JA8 TITLE 24</div><div>ENERGY STAR</div><div>UL CERTIFIED US-CA</div><div>Declare.</div></div>	<b>Ratings</b> <div><div>Wet Location</div></div>	<b>Guarantee</b> <div><div>10 YEARS</div><div></div></div>




Round


HOUSINGS

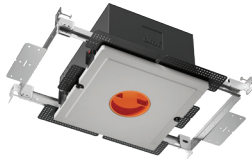

**ART2-NCRFL**<sup>1</sup>  
 Flangeless

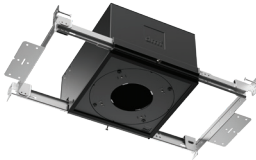

**X2NCR**  
 New Construction

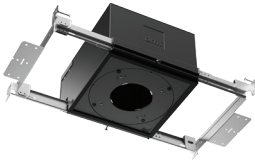

**X2CPR**  
 Chicago Plenum




**X2RMR**<sup>1</sup>  
 Remodel

PREMIUM TRIMS




**ART2T-RDSSBBMF**<sup>1</sup>  
 Micro Flange

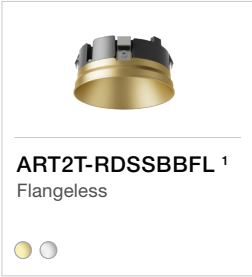


**ART2T-RDSSBBFL**<sup>1</sup>  
 Flangeless

Round

STANDARD TRIMS & ACCESSORIES

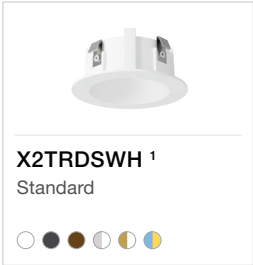


**X2TRDSWH**<sup>1</sup>  
 Standard




**X2TRDWWH**<sup>1</sup>  
 Wall Wash




**X2TRDPWH**<sup>1</sup>  
 Pinhole



**X2TRDHHW**<sup>1</sup>  
 Hyperbolic

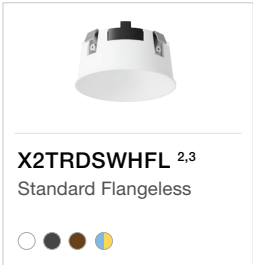


**X2TRDSWHFL**<sup>2,3</sup>  
 Standard Flangeless

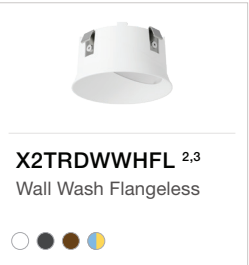


**X2TRDWWHFL**<sup>2,3</sup>  
 Wall Wash Flangeless




**X2TRDPWHFL**<sup>2</sup>  
 Pinhole Flangeless




**X2TRDHHWFL**<sup>2</sup>  
 Hyperbolic Flangeless

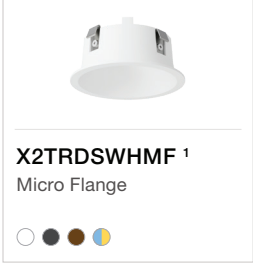


**X2TRDSWHMF**<sup>1</sup>  
 Micro Flange

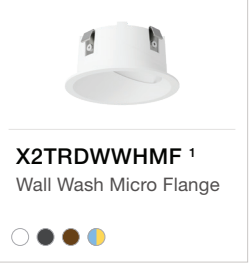


**X2TRDWWHMF**<sup>1</sup>  
 Wall Wash Micro Flange

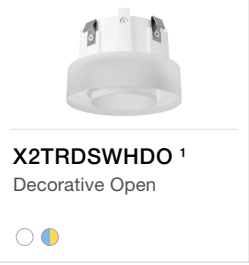


**X2TRDSWHDO**<sup>1</sup>  
 Decorative Open




**X2TRDSWHDH**<sup>1</sup>  
 Decorative Hyperbolic

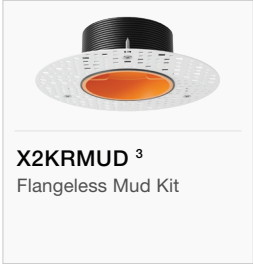


**X2KRMUD**<sup>3</sup>  
 Flangeless Mud Kit

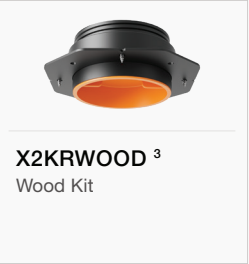


**X2KRWOOD**<sup>3</sup>  
 Wood Kit

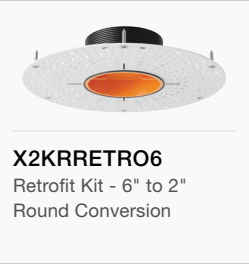


**X2KRRETRO6**  
 Retrofit Kit - 6" to 2"  
 Round Conversion




**X2KRRETRO45**  
 Retrofit Kit - 4" or 5" to 2"  
 Round Conversion

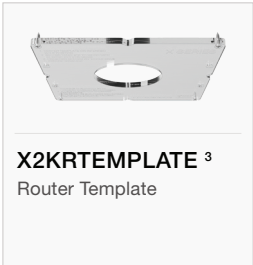

**X2KRTEMPLATE**<sup>3</sup>  
 Router Template

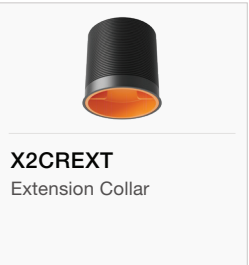

**X2CREXT**  
 Extension Collar

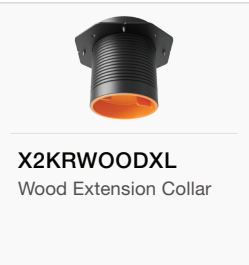

**X2KRWOODXL**  
 Wood Extension Collar

FINISH OPTIONS

- White (WH)

● Black (BK)

● Bronze (BZ)
- Clear Diffuse, White Flange (CW)

● Warm Diffuse, White Flange (WW)

● Custom Color (CC)
- Satin Brushed Brass (SBB)


○ Anodized Silver Aluminum (ASA)

<sup>1</sup> Precision Lock Collar included  
<sup>2</sup> Flangeless Mud or Wood Kit required  
<sup>3</sup> Not compatible with Remodel



Square

HOUSINGS



ART2-NCSFL <sup>1</sup>  
Flangeless



X2NCS  
New Construction



X2CPS  
Chicago Plenum



X2RMS <sup>1</sup>  
Remodel

PREMIUM TRIMS



ART2T-SDSSBBMF <sup>1</sup>  
Micro Flange



ART2T-SDSSBBFL <sup>1</sup>  
Flangeless

Square

STANDARD TRIMS & ACCESSORIES



X2TSDSWH <sup>1</sup>  
Standard



X2TSDSWHFL <sup>2</sup>  
Standard Flangeless



X2TSDSWHMF <sup>1</sup>  
Micro Flange



X2TSDPWH <sup>1</sup>  
Pinhole



X2TSDPWHFL <sup>2</sup>  
Pinhole Flangeless



X2TSDWWH <sup>1</sup>  
Wall Wash



X2TSDWWHFL <sup>2,3</sup>  
Wall Wash Flangeless



X2TSDWWHMF <sup>1</sup>  
Wall Wash Micro Flange



X2TSDSWHDO <sup>1</sup>  
Decorative Open




X2TSDSWHDF <sup>1</sup>  
Decorative Float



X2KSMUD <sup>1</sup>  
Flangeless Mud Kit



X2KSWOOD <sup>1</sup>  
Wood Kit



X2KSRETRO6  
Retrofit Kit - 6" to 2"  
Square Conversion



X2KSTEMPLATE  
Router Template

FINISH OPTIONS

- White (WH)
- Black (BK)
- Bronze (BZ)
- Clear Diffuse, White Flange (CW)
- Warm Diffuse, White Flange (WW)
- Custom Color (CC)
- Satin Brushed Brass (SBB)
- Anodized Silver Aluminum (ASA)

<sup>1</sup> Precision Lock Collar included  
<sup>2</sup> Flangeless Mud or Wood Kit required  
<sup>3</sup> Not compatible with Remodel





# Artafex

2" Adjustable

PRODUCT SPECS



- Delivers the ultimate in quiet ceiling designs
- Eliminates over-cutting and ensures perfect cutout
- Deep die-cast aluminum trim provide unmatched precision and exceptionally easy installation
- In-house designed integrated driver ensures seamless compatibility with every major lighting control system

<b>Application</b> New Construction, Remodel, Retrofit	<b>Adjustment</b> 360° rotation, 35° tilt	<b>Aperture</b> 2"	<b>Input Voltage</b> 120/277V
<b>Compatible Housings</b> Artafex Flangeless, X Series	<b>Color Quality</b> True Spectrum™	<b>Ceiling Material</b> Drywall, Millwork	
<b>Delivered Lumens</b> 750 lm (12.5W), 1000 lm (14.3W)	<b>Dimming</b> TRIAC/ELV (1%, 120V only), DALI-2 (0.1%)	<b>Ceiling Thickness</b> New Construction: 1/2" up to 1 1/4" Remodel: 5/8" up to 1 1/4"	

Color Temperatures

- 2700K
- 3000K
- 3500K
- 4000K
- Warm Dim, 3000–1800K
- Tunable White, 4000–1800K


Beam Spread

- 20°  
Narrow Spot
- 30°  
Spot
- 40°  
Flood
- 50°  
Wide Flood
- 50° x30°  
Linear Spread

Standards



Ratings




Guarantee






Round


HOUSINGS



ART2-NCRFL  
Flangeless

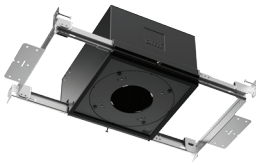

X2NCR  
New Construction

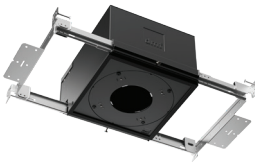

X2CPR  
Chicago Plenum



X2RMR <sup>1</sup>  
Remodel

PREMIUM TRIMS



ART2T-RASSBBMF <sup>1</sup>  
Micro Flange



ART2T-RASSBBFL <sup>1</sup>  
Flangeless



STANDARD TRIMS & ACCESSORIES



X2TRASWH <sup>1</sup>  
Standard



X2TRASWHMF <sup>1</sup>  
Micro Flange



X2TRASWHFL <sup>2,3</sup>  
Standard Flangeless



X2TRAPWH <sup>1</sup>  
Pinhole




X2TRAPWHFL <sup>2</sup>  
Pinhole Flangeless



X2KRUD <sup>3</sup>  
Flangeless Mud Kit



X2KRWOOD <sup>3</sup>  
Wood Kit




X2KRRETRO6  
Retrofit Kit - 6" to 2"  
Round Conversion




X2KRTEMPLATE <sup>3</sup>  
Router Template

Square


HOUSINGS



ART2-NCSFL  
Flangeless

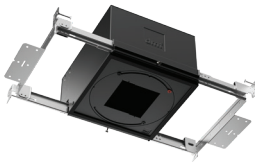

X2NCS  
New Construction

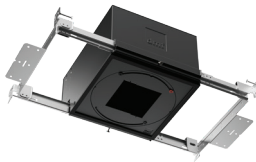

X2CPS  
Chicago Plenum



X2RMS <sup>1</sup>  
Remodel

PREMIUM TRIMS



ART2T-SASSBBMF <sup>1</sup>  
Micro Flange



ART2T-SASSBBFL <sup>1</sup>  
Flangeless



STANDARD TRIMS & ACCESSORIES



X2TSASWH <sup>1</sup>  
Standard



X2TSASWHMF <sup>1</sup>  
Micro Flange



X2TSASWHFL <sup>2,3</sup>  
Standard Flangeless



X2TSAPWH <sup>1</sup>  
Pinhole



X2TSAPWHFL <sup>2</sup>  
Pinhole Flangeless



X2KSUD <sup>3</sup>  
Flangeless Mud Kit



X2KSWOOD <sup>3</sup>  
Wood Kit



X2KSRETRO6  
Retrofit Kit - 6" to 2"  
Square Conversion



X2KSTEMPLATE <sup>3</sup>  
Router Template

FINISH OPTIONS

- White (WH)
- Black (BK)
- Bronze (BZ)
- Clear Diffuse, White Flange (CW)
- Warm Diffuse, White Flange (WW)
- Custom Color (CC)
- Satin Brushed Brass (SBB)
- Anodized Silver Aluminum (ASA)

<sup>1</sup> Precision Lock Collar included  
<sup>2</sup> Flangeless Mud or Wood Kit required  
<sup>3</sup> Not compatible with Remodel






## Hand-picked for Custom Integration

We’ve carefully selected a collection of outdoor lighting fixtures designed to elevate residential landscapes, making them the perfect choice for both discerning integrators and homeowners.


## Elevate the Everyday

Paint with light to focus attention and accentuate natural beauty. We design our fixtures to see the light, not the fixture. Our light quality and projection goes farther. The low field-angle reflector design puts light where you want it and eliminates hot spots near mounting. Our fully adjustable Glare Shield provides additional shielding and focus control.

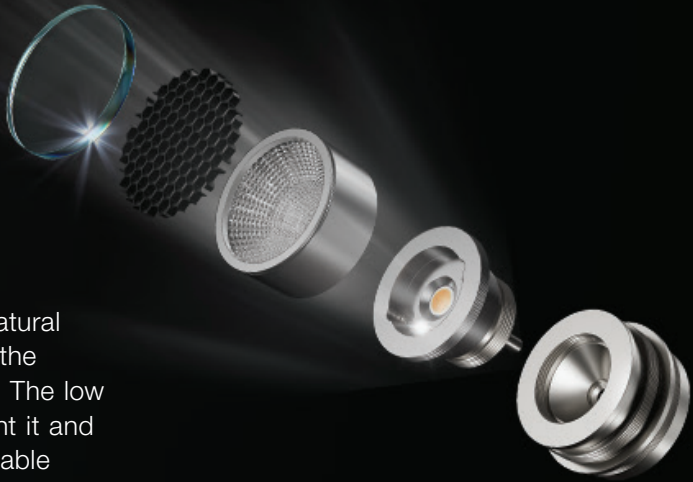

## Intelligent Design

- Flexible swivel/lock system provides maximum rotation for exceptional adjustability and durability
- Modular LED engine and lamp design ensures lights can easily change and adapt with your outdoor environment
- Thoughtfully designed weep holes keep standing water and debris from affecting performance
- Easy to open and service, stays water tight

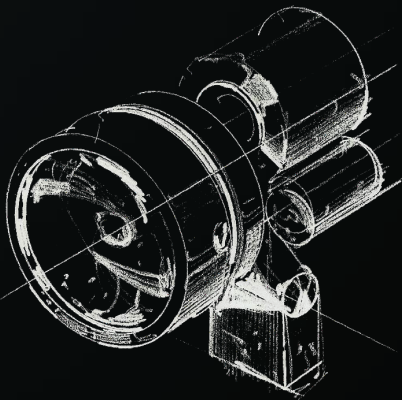

## Lifelong Performance

With premium materials and years of design expertise, we ensure our lights withstand environmental effects and the test of time.

- Machined from solid aircraft grade (6061-T6), corrosion resistant aluminum, then anodized and powder coated to create a highly durable, marine grade finish
- IP67 Rated, water immersion and dust protected
- Every fixture is tested before shipment for water tightness and light quality







Accent & Landscape



Discrete 1.25" accent light highlights smaller plants without being seen. It is also perfect for in-tree and architectural mounted applications.



Prefer a lamp based solution for your residential landscape needs, both our modern and traditional center pivot 2.25" accent lights include the flexibility of an included SORAA high performance LED MR16 lamp.



Versatile 1.65" accent light, ideal for integrated LED landscape lighting. Compact and powerful, perfect for illuminating residential trees and architectural elements.

Path & Bollard



Elegant 1" round mini post light offers a 180° field of illumination, ideal for pathways, lower height plants, and ground cover. Its thoughtful design minimizes the fixture footprint, providing a beautiful alternative to traditional 'top hat' applications.



Strikingly beautiful 1" round mini post light delivers dual-sided illumination, perfect for modern designs favoring high-contrast lighting solutions.



Simple and elegant 1" square design delivers a smooth 360° pool of illumination. Available in both 12" and 24" heights, and highly complements modern residential designs.



Essentially our 1.65" versatile ZXL11 accent light affixed to a stem, this path light provides directional light that can cross wide paths, accent signage, and areas of interest like architectural details and artwork.

Flood & Wall Wash



Our newest design, this 1" square flood light throws a broad pool of soft illumination a short distance from its mounting position. The integrated glare shield minimizes fixture visibility making it a perfect solution for arid landscape plantings and small architectural or garden features.



Compact yet powerful, this 2" versatile floodlight throws strong and even light distribution. It can be used on its own or with several to highlight architectural walls and large hedges or areas of similar landscape, where even lighting is preferred.





## Engineered for Integrators

With new options and spray foam rated housing the 4" lighting system offers more choices than ever. Artafex 4" modules with True Spectrum™ are now available offering exceptional display of colors, and the acclaimed 4" lighting modules are also still available.

Optimized for residential applications, from traditional to modern aesthetics, with whiter or warmer light outputs, DMF 4" lighting seamlessly integrates into major lighting control solutions and offers flawless dimming. It's been recognized as the standard and is exclusively available through the integrator channel.






## 4" Downlight

The 4" Downlight improves on every major metric by which quality lighting is judged. In addition, modularity has been taken a step further to provide field-changeable optics and accessories. The 4" Downlight also includes an integrated power system for simplified installation and maintenance as well as expansive compatibility with existing DMF housings and trims and most TRIAC/ELV and controls systems.

## Spray Foam Rated Housing

Designed to meet the requirements of UL 1598 and the current NFP regulations as published in the NEC and now available for all 4" Series housing.

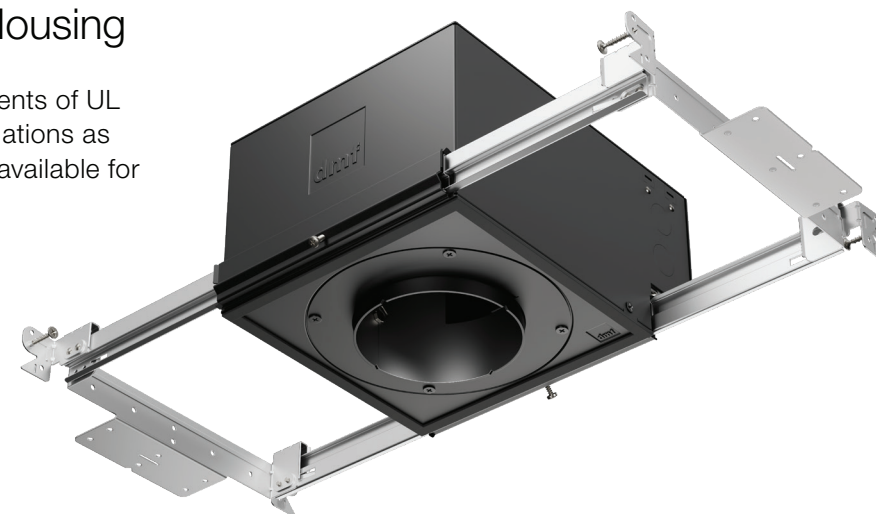

## 4" Adjustable

The 4" Adjustable offers ultimate lighting flexibility to custom integrators thanks to its tool-free aiming. With full 360° directional lighting and class-leading 45° tilt, the 4" Adjustable covers angled ceilings, distant aiming and more. Combined with an integrated driver and field changeable optics and accessories, the 4" Adjustable radically simplifies modern lighting design.



## Retrofit

The 4" Retrofit Conversion Kit allows conversion of a preexisting 6" fixtures to a standard or adjustable 4" downlight module, with a large selection of flangeless or standard trim options available. Now the advantages of beautiful lighting are available to everyone.







## A Perfect Match

The materials, heft, and finish of our trims set them apart in the category. The choice of finish, shape, function, and custom colors tailor them to your client's vision. From wall wash to hyperbolic to pinhole, our trim designs accommodate any aesthetic, no matter how often it changes. And with easy installation, keeping up with your client's tastes is as simple as Twist & Lock, no tools required.



### Round

Featuring a classic, elegant design that complements any project.



### Square

A modern look that's expertly die cast with sharp edges and precise corners.



### Round on Square

Unobstructed illumination from a square profile.



### Pinhole

Accentuates light distribution for a narrow, spotlight effect. Choose between straight or beveled edges.



### Hyperbolic

A unique reflector that provides completely smooth, uniform light and blends into ceilings.



### Flangeless

Flangeless wood application or use with low-profile mud flange. Available for Round, Square, Hyperbolic, Pinhole, and Wall Wash trims.



### Decorative

Features finely crafted acrylic that delivers a subtle, radiant glow. Options include an open or closed bottom, and a frosted or clear finish.



### Wall Wash

Perfect for delivering broad, consistent light across a wall surface with an unobtrusive design that stays above the ceiling plane.





# See Things in a Whole New Light

Retrofitting DMF downlights into existing fixtures is the quickest, most economical path to enhancing a living space. With improved color representation and multiple interchangeable options, our lights can radically transform how a room looks and feels. Our modules feature integrated drivers and broad controls compatibility, making the process fast and simple.







# Artafex

## 4" Downlight

PRODUCT SPECS



- Produces up to 1500 lumens of premium lighting for natural, true-to-life colors without sacrificing stellar efficiency
- Field-changeable light distribution ranging from 15° to 90°+
- Smooth, flicker-free dimming down to 1% with centralized or local control
- Integrated driver, Plug & Play connection, and Twist & Lock trims
- Flexibility during and after installation with interchangeable modules, optics and trims

<b>Application</b> New Construction, Remodel, Retrofit	<b>Aperture</b> 4"	<b>Input Voltage</b> 120/277V
<b>Compatible Housings</b> M Series; Surface Mount; 4" Cylinder; 4", 5", 6" Retrofit	<b>Color Quality</b> True Spectrum™	<b>Ceiling Material</b> Drywall, Millwork
<b>Delivered Lumens</b> 750 lm (9.5W), 1000 lm (12.5W ), 1250 lm (14.3W), 1500 lm (16.5W)	<b>Dimming</b> TRIAC/ELV (1%, 120V only), EcoSystem (1%), DALI-2 (0.1%)	<b>Ceiling Thickness</b> New Construction: 1/2" up to 1 3/4" Remodel: 5/8" up to 1 1/4"

### Color Temperatures

- 2700K
- 3000K
- 3500K
- 4000K
- Warm Dim, 3000–1800K
- Tunable White, 4000–1800K

### Beam Spread


- 15°  
Narrow Spot
- 25°  
Spot
- 40°  
Flood
- 60°  
Wide Flood
- 90°+  
General
- 40° x 20°  
Linear Spread
- Soft  
Focus

**Shape**  
Round, Square

### Standards



### Ratings




### Guarantee






Round

HOUSINGS




**M4NCRS**  
 New Construction  
 Standard



**M4NCRF**  
 New Construction  
 Fire Rated




**M4CPRS**  
 Chicago  
 Plenum

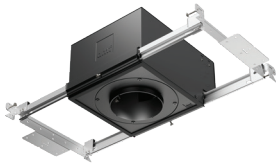


**M4SFRS**  
 New Construction  
 Spray Foam



**M4DHRS**  
 Double  
 Housing



**M4LTRS**  
 Low Profile  
 Standard



**M4LTRF**  
 Low Profile  
 Fire Rated



**M4RMRS**  
 Remodel  
 Standard



**M4RMRF**  
 Remodel  
 Fire Rated



**M4CC**  
 Concrete  
 Construction

Round

TRIMS & ACCESSORIES



**M4TRSWH**  
 Standard



**M4TRHWH**  
 Hyperbolic



**M4TRPWH**  
 Pinhole



**M4TRLWH**  
 Wall Wash



**M4TRCWH**  
 Square Conversion



**M4TRSWHFL <sup>1</sup>**  
 Standard Flangeless



**M4TRHWHFL <sup>1</sup>**  
 Hyperbolic Flangeless



**M4TRPWHFL <sup>1</sup>**  
 Pinhole Flangeless



**M4TRLWHFL <sup>1</sup>**  
 Wall Wash Flangeless



**M4TRSWHDOF**  
 Decorative: Open,  
 Frosted




**M4TRSWHDCF**  
 Decorative: Closed,  
 Frosted



**M4TRSWHDCC**  
 Decorative: Closed,  
 Clear, Frosted Side



**M4TRSWHDCCF**  
 Decorative: Closed,  
 Clear, Frosted Inside



**M4XRMUD**  
 Flangeless Mud Plate



**M4KRRETRO6**  
 Retrofit Kit - 6" to 4"  
 Round Conversion



**M4KRTEMPLATE**  
 Router Template



**M4CREXT**  
 Extension Collar

FINISH OPTIONS

- White (WH)

Black (BK)

Bronze (BZ)

Clear Diffuse, White Flange (CW)

Warm Diffuse, White Flange (WW)


Custom Color (CC)

<sup>1</sup> Flangeless Mud Plate required for drywall ceiling installation; Router Template recommended for wood ceiling installation




Square


HOUSINGS




**M4NCSS**  
New Construction  
Standard




**M4NCSF**  
New Construction  
Fire Rated




**M4CPSS**  
Chicago  
Plenum

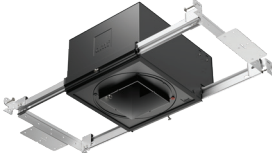


**M4SFSS**  
New Construction  
Spray Foam




**M4LTSS**  
Low Profile  
Standard



**M4LTSF**  
Low Profile  
Fire Rated




**M4RMSS**  
Remodel  
Standard




**M4RMSF**  
Remodel  
Fire Rated

TRIMS




**M4TSSWH**  
Square

○ ● ● ● ● ● ●




**M4TSQWH**  
Round on Square

○ ● ● ● ● ● ●




**M4TSPWH**  
Pinhole

○ ● ● ● ● ● ●




**M4TSWWH**  
Wall Wash

○ ● ● ● ● ● ●




**M4TSSWHFL** <sup>1</sup>  
Standard Flangeless

○ ● ● ● ● ● ●




**M4TSQWHFL** <sup>1</sup>  
Round on Square  
Flangeless

○ ● ● ● ● ● ●




**M4TSPWHFL** <sup>1</sup>  
Pinhole Flangeless

○ ● ● ● ● ● ●




**M4TSWWHFL** <sup>1</sup>  
Wall Wash Flangeless

○ ● ● ● ● ● ●



**M4TSSWHDCF**  
Decorative: Closed,  
Frosted

○ ● ● ● ● ● ●



**M4TSSWHDCCF**  
Decorative: Closed,  
Clear, Frosted Inside

○ ● ● ● ● ● ●


FINISH OPTIONS

- White (WH)
- Black (BK)
- Bronze (BZ)
- Clear Diffuse, White Flange (CW)
- Warm Diffuse, White Flange (WW)
- Custom Color (CC)


<sup>1</sup> Flangeless Mud Plate required for drywall ceiling installation;  
Router Template recommended for wood ceiling installation

Square


ACCESSORIES




**M4XSMUD**  
Flangeless Mud Plate



**M4KSRETRO6**  
Retrofit Kit - 6" to 4"  
Square Conversion




**M4KSTEMPLATE**  
Router Template



**M4CSEXT**  
Extension Collar


Retrofit

4" TRIMS



**DRD2TR4SWH**  
Smooth


○ ●



**DRD2TR4BWH**  
Baffle


○

5" TRIMS



**DRD2TR5SWH**  
Smooth


○ ●



**DRD2TR5BWH**  
Baffle


○

6" TRIMS



**DRD2TR6SWH**  
Smooth


○ ●




**DRD2TR6BWH**  
Baffle

○


ADAPTERS




**DRD2X-QCM-ED**  
Edison Adapter



**DRD2X-QCM-M**  
Male IDEAL PowerPlug® Adapter




**DRD2X-QCM-GU**  
GU-24 Adapter




**DRD2X-QCM-HW**  
Hardwire Adapter

Surface Mount Housing

HOUSINGS & TRIMS

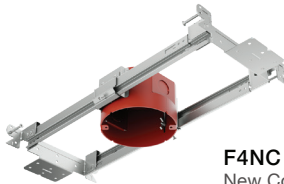

**F4NC**  
New Construction  
Fire Rated



**DRD2TRJSWH**  
Surface Mount

○

FINISH OPTIONS

- White (WH)
- Black (BK)





# Artafex

4" Adjustable

PRODUCT SPECS



- 360° directional aiming for complete light coverage
- Class leading 45° tilt with 15°, 25° or 40° field-changeable light distribution
- Smooth, flicker-free dimming down to 1% with centralized or local control
- Integrated driver, Plug & Play connection, and Twist & Lock trims
- Flexibility during and after installation with interchangeable modules, optics and trims

<b>Application</b> New Construction, Remodel, Retrofit	<b>Adjustment</b> 360° directional aim, 45° tilt	<b>Aperture</b> 4" , 5" , 6"	<b>Input Voltage</b> 120/277V
<b>Compatible Housings</b> M Series; Surface Mount; 4" Cylinder; 4" , 5" , 6" Retrofit	<b>Color Quality</b> True Spectrum™	<b>Ceiling Material</b> Drywall, Millwork	
<b>Delivered Lumens</b> 750 lm (9.5W), 1000 lm (12.5W )	<b>Dimming</b> TRIAC/ELV (1%, 120V only), DALI-2 (0.1%)	<b>Ceiling Thickness</b> New Construction: 1/2" up to 1 3/4" Remodel: 5/8" up to 1 1/4"	

### Color Temperatures

- 2700K
- 3000K
- 3500K
- 4000K
- Warm Dim, 3000–1800K
- Tunable White, 4000–1800K


### Beam Spread

- 15°  
Narrow Spot
- 25°  
Spot
- 40°  
Flood
- 40° x 20°  
Linear Spread
- Soft  
Focus

### Standards



### Ratings



### Specialty Lens




### Guarantee






Round

HOUSINGS




**M4NCRS**  
 New Construction  
 Standard



**M4NCRF**  
 New Construction  
 Fire Rated




**M4CPRS**  
 Chicago  
 Plenum




**M4SFRS**  
 New Construction  
 Spray Foam



**M4DHRS**  
 Double  
 Housing



**M4LTRS**  
 Low Profile  
 Standard



**M4LTRF**  
 Low Profile  
 Fire Rated



**M4RMRS**  
 Remodel  
 Standard



**M4RMRF**  
 Remodel  
 Fire Rated



**M4CC**  
 Concrete  
 Construction

Round

TRIMS



**M4TRSWH**  
 Round



**M4TRHWH**  
 Hyperbolic



**M4TRPWH**  
 Pinhole



**M4TRSWHFL <sup>1</sup>**  
 Round Flangeless




**M4TRHWHFL <sup>1</sup>**  
 Hyperbolic Flangeless



**M4TRPWHFL <sup>1</sup>**  
 Pinhole Flangeless



ACCESSORIES



**M4XRMUD**  
 Flangeless Mud Plate



**M4KRRETRO6**  
 Retrofit Kit - 6" to 4"  
 Round Conversion



**M4KRTEMPLATE**  
 Router Template



**M4CREXT**  
 Extension Collar

FINISH OPTIONS

- White (**WH**)

Black (**BK**)

Bronze (**BZ**)
- Clear Diffuse, White Flange (**CW**)

Warm Diffuse, White Flange (**WW**)


Custom Color (**CC**)

<sup>1</sup> Flangeless Mud Plate required for drywall ceiling installation; Router Template recommended for wood ceiling installation




Square


HOUSINGS

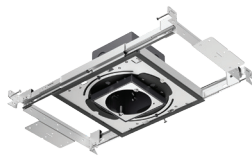


**M4NCSS**  
 New Construction  
 Standard

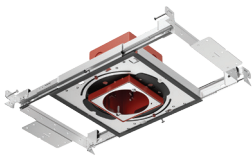


**M4NCSF**  
 New Construction  
 Fire Rated

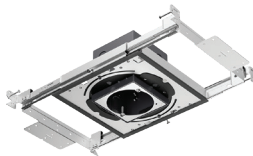


**M4CPSS**  
 Chicago  
 Plenum

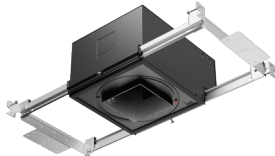

**M4SFSS**  
 New Construction  
 Spray Foam

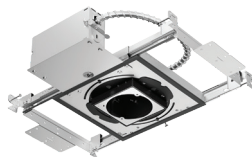


**M4LTSS**  
 Low Profile  
 Standard

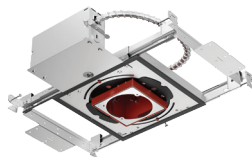

**M4LTSF**  
 Low Profile  
 Fire Rated



**M4RMSS**  
 Remodel  
 Standard



**M4RMSF**  
 Remodel  
 Fire Rated

TRIMS



**M4TSQWH**  
 Round on Square



**M4TSQWHFL** <sup>1</sup>  
 Round on Square  
 Flangeless



**M4TSPWH**  
 Pinhole



**M4TSPWHFL** <sup>1</sup>  
 Pinhole  
 Flangeless



FINISH OPTIONS

- ☐ White (**WH**)

☐ Black (**BK**)

☐ Bronze (**BZ**)
- ☐ Clear Diffuse, White Flange (**CW**)

☐ Warm Diffuse, White Flange (**WW**)

☐ Custom Color (**CC**)

<sup>1</sup> Flangeless Mud Plate required for drywall ceiling installation; Router Template recommended for wood ceiling installation

Square

ACCESSORIES



**M4XSMUD**  
 Flangeless Mud Plate



**M4KSRETRO6**  
 Retrofit Kit - 6" to 4" Square Conversion



**M4KSTEMPLATE**  
 Router Template



**M4CSEXT**  
 Extension Collar

Retrofit

4" TRIMS



**DRD2TR4SWH**  
 Smooth



**DRD2TR4BWH**  
 Baffle



5" TRIMS



**DRD2TR5SWH**  
 Smooth



**DRD2TR5BWH**  
 Baffle



6" TRIMS



**DRD2TR6SWH**  
 Smooth



**DRD2TR6BWH**  
 Baffle



ADAPTERS



**DRD2X-QCM-ED**  
 Edison Adapter



**DRD2X-QCM-GU**  
 GU-24 Adapter



**DRD2X-QCM-M**  
 Male IDEAL PowerPlug® Adapter



**DRD2X-QCM-HW**  
 Hardwire Adapter

Surface Mount Housing

HOUSINGS & TRIMS



**F4NC**  
 New Construction  
 Fire Rated



**DRD2TRJSWH**  
 Surface Mount




FINISH OPTIONS

- ☐ White (**WH**)
- ☐ Black (**BK**)



# Multiples

Multi-head Lighting System

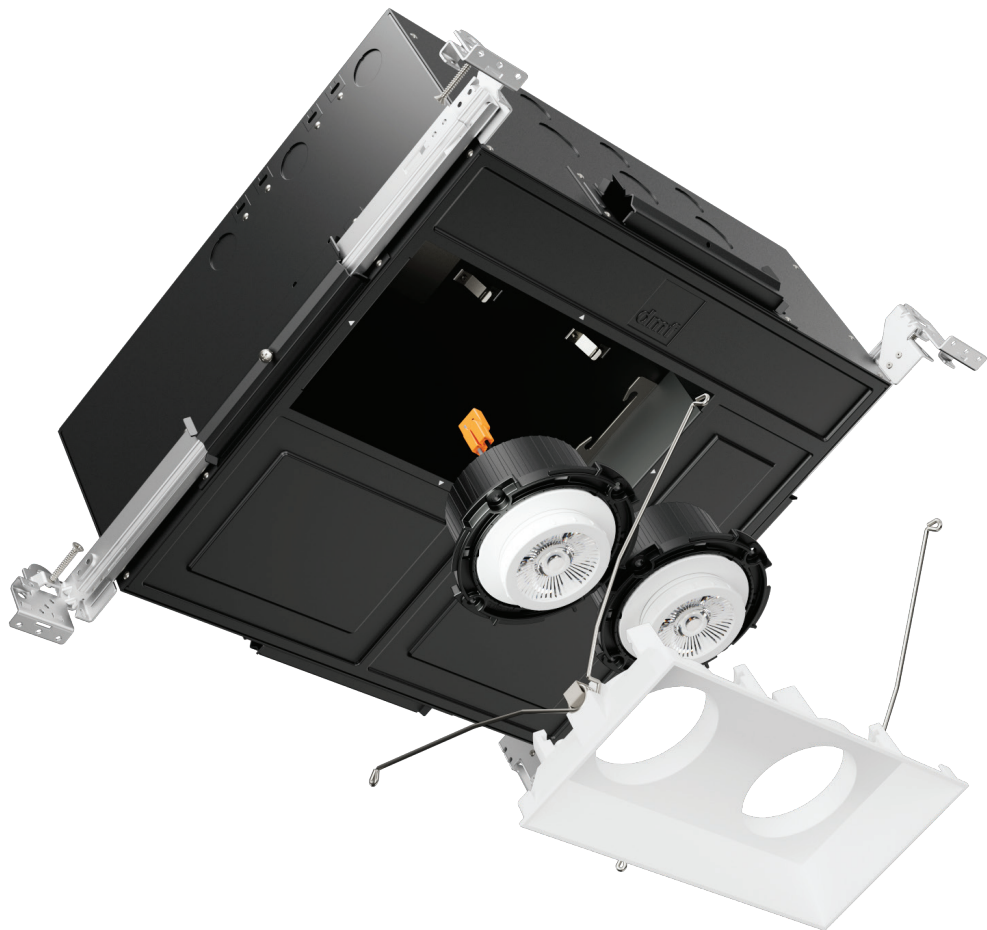

## Highlight Multiple Focal Points

These rectangular multiple options are based around our 4" modules and maintain clean lines in the ceiling while providing maximum light output. Multi-directional adjustments with 360° directional aim and 45° tilt precisely highlights focal points throughout the interior. Featuring architectural trims that allow for up to 3 openings in one seamless piece.





# Multiples

Multi-head Lighting System



- Rectangular Multiple Options based around our 4" modules maintain clean lines in the ceiling while providing maximum light output
- Multi-directional adjustment with 360 degree directional aim and 45 degree tilt precisely highlights focal points throughout the interior
- Architectural trims allow for up to 3 openings in one seamless piece
- Integrated driver options allow for dimming options down to 0.1% and individual module control if desired
- Flexibility during and after installation with interchangeable modules, optics and trims


<b>Application</b> New Construction	<b>Adjustment</b> 360° directional aim, 45° tilt	<b>Aperture</b> 4"
<b>Ceiling Thickness</b> New Construction: 1/2" up to 1 1/4"	<b>Color Quality</b> 93 CRI, 2-step SDCM	<b>Ceiling Material</b> Drywall, Millwork
<b>Delivered Lumens</b> Per Head: 750 lm (9.5W), 1000 lm (12.5W)	<b>Dimming</b> TRIAC/ELV (1%, 120V only), EcoSystem (1%), DALI-2 (0.1%)	<b>Input Voltage</b> 120/277V
<div><div><b>Color Temperatures</b><div><div><div></div><div>2700K</div></div><div><div></div><div>3000K</div></div><div><div></div><div>3500K</div></div><div><div></div><div>4000K</div></div><div><div></div><div>Warm Dim, 3000–1800K</div></div><div><div></div><div>Tunable White, 4000–1800K</div></div></div></div><div><b>Beam Spread</b><div><div><div></div><div>15° Narrow Spot</div></div><div><div></div><div>25° Spot</div></div><div><div></div><div>40° Flood</div></div><div><div></div><div>40° x 20° Linear Spread</div></div><div><div></div><div>Soft Focus</div></div></div></div></div>		
<b>Standards</b> <div><div><div><div></div><div>JA8</div><div>TITLE 24</div></div><div><div></div><div>ENERGY STAR</div></div><div><div></div><div>CERTIFIED</div><div>US 24</div></div><div><div></div><div>Declare.</div></div></div></div>	<b>Ratings</b> <div><div><div></div><div>Damp Location</div></div></div>	<b>Guarantee</b> <div><div><div></div><div>5</div><div>YEARS</div></div><div><div></div><div></div></div></div>

# Multiples

Multi-head Lighting System

HOUSINGS & TRIMS

## HOUSINGS

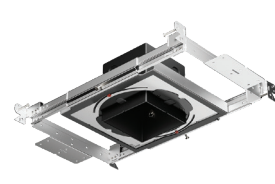

M4NCS1S  
New Construction  
1-Head



M4NCS2S  
New Construction  
2-Head



M4NCS3S  
New Construction  
3-Head

## TRIMS & ACCESSORIES

M4T1SWH  
1-Head Standard

M4T2SWH  
2-Head Standard

M4T3SWH  
3-Head Standard

M4T1SWHFL <sup>1</sup>  
1-Head Flangeless

M4T2SWHFL <sup>1</sup>  
2-Head Flangeless

M4T3SWHFL <sup>1</sup>  
3-Head Flangeless

M4XS1MUD  
1-Head Flangeless  
Mudplate

M4XS2MUD  
2-Head Flangeless  
Mudplate

M4XS3MUD  
3-Head Flangeless  
Mudplate

<sup>1</sup> Flangeless Mud Plate required for drywall ceiling installation; Router Template recommended for wood ceiling installation

## FINISH OPTIONS

- White (WH)
- Black (BK)
- Custom Color (CC)



# X Series Cylinder

X Series Cylinders provide a compact form factor in pendant, surface mount, and wall mount solutions. Field-changeable trims, decorative diffusers, snoot, and optics deliver uncompromised performance and serviceability with flexible distribution and aesthetics.



## Features

Options to fit almost any spec or application.



### Suspension Options

Cord or stem suspension options, and both are field-cuttable to exact requirements.



### ADA Compliant

The overall projection of the wall sconce from the surface of the wall is less than 4.0" making it ADA compliant, when installed at the proper height.



### Uplight

Shadowless pendant uplight allows for direct and indirect lighting from a single cylinder.



### Wall Wash

Perfect for delivering consistent light across a wall surface.



### Decorative Trims

Finely crafted acrylic with transparent and frosted visual elements.



### Snoot

Channels light out of the cylinder and mitigates glare.



### Wet Location Rated

Available moisture protection options are IP65 and UL Listed as water-resistant and rated for outdoor use.





# X Series Cylinder

Pendant Mount

PRODUCT SPECS



- Versatile, small diameter pendant mount cylinder
- Field cuttable cord and stem options
- Robust machined aluminum construction
- IP65/Wet Location standard across most configurations

<b>Mount</b> Cord, Stem	<b>Size</b> Diameter: 3.5" Height: 6.5", 9"	<b>Canopy</b> Standard
<b>Input</b> 120/277V	<b>Color Quality</b> 93 CRI, 2-step SDCM	<b>Lumen Output</b> 750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W)
<b>Color Temperature</b> <div><div></div> 2700K<div></div> 3000K<div></div> 3500K</div> <div><div></div> 4000K<div></div> Warm Dim, 3000–1800K</div> <div><div></div> Tunable White, 4000–1800K</div>		<b>Suspension Length</b> Standard: 24" or 48", Custom: Up to 96" (Stem), Up to 156" (Cord)
<b>Lighting Type</b> <div><div></div> Downlight<div></div> Up and downlight</div>		<b>Beam Spread</b> <div><div></div> 25° Spot<div></div> 40° Flood<div></div> 60° Wide Flood</div>
<b>Dimming</b> TRIAC/ELV (120V): 1% DALI-2 (120/277V): 0.1%		<b>Finish</b> White, Black, Brushed Aluminum, Bronze, Custom Color
		<b>Trims</b> Standard, Snoot, Wall Wash, Decorative
		<b>Ratings</b> <div></div> Wet Location / IP65 Rated Configurations Available

Standards



Guarantee





# X Series Cylinder

Surface Mount



- Versatile, small diameter surface mount cylinder
- Installs Directly to a surface or recessed mounted junction box, ideal for areas with limited ceiling height & plenum space restrictions
- Robust machined aluminum construction
- IP65/Wet Location standard across most configurations

<b>Mount</b> Surface	<b>Size</b> Diameter: 3.5" Height: 6.5", 9"	<b>Bracket</b> Standard
<b>Input</b> 120/277V	<b>Color Quality</b> 93 CRI, 2-step SDCM	<b>Lumen Output</b> 750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W), 1500 lm (16.5W)
<b>Color Temperature</b> <div><div><div></div>2700K</div><div><div></div>3000K</div><div><div></div>3500K</div><div><div></div>4000K</div><div><div></div>Warm Dim, 3000–1800K</div><div><div></div>Tunable White, 4000–1800K</div></div>		<b>Beam Spread</b> <div><div><div></div>25° Spot</div><div><div></div>40° Flood</div><div><div></div>60° Wide Flood</div></div>
<b>Lighting Type</b> <div><div><div></div></div><div>Downlight</div></div>		<b>Finish</b> White, Black, Brushed Aluminum, Bronze, Custom Color
		<b>Trims</b> Standard, Snoot, Wall Wash, Decorative
<b>Dimming</b> TRIAC/ELV (120V): 1% DALI-2 (120/277V): 0.1%		<b>Ratings</b> <div><div></div>Wet Location / IP65 Rated Configurations Available</div>
<b>Standards</b> <div><div><div>JA8</div><div>TITLE 24</div></div><div><div>ENERGY STAR</div></div><div><div>UL</div><div>CERTIFIED</div><div>US-CA</div></div><div><div>Declare.</div></div></div>		<b>Guarantee</b> <div><div><div>5</div><div>YEARS</div></div><div><div>50k</div><div>HOURS</div></div></div>

# X Series Cylinder

Wall Mount



- Versatile, small diameter wall mount cylinder
- Robust machined aluminum construction
- Wet Listed options for exterior locations

<b>Mount</b> Wall	<b>Size</b> Diameter: 3.5" Height: 6.5", 9"	<b>Bracket</b> Standard, Slim
<b>Input</b> 120/277V	<b>Color Quality</b> 93 CRI, 2-step SDCM	<b>Lumen Output</b> 750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W), 1500 lm (16.5W)
<b>Color Temperature</b> <div><div><div></div>2700K</div><div><div></div>3000K</div><div><div></div>3500K</div><div><div></div>4000K</div><div><div></div>Warm Dim, 3000–1800K</div><div><div></div>Tunable White, 4000–1800K</div></div>		<b>Beam Spread</b> <div><div><div></div>25° Spot</div><div><div></div>40° Flood</div><div><div></div>60° Wide Flood</div></div>
<b>Lighting Type</b> <div><div><div></div></div><div>Downlight</div></div> <div><div><div></div></div><div>Up and downlight</div></div>		<b>Finish</b> White, Black, Brushed Aluminum, Bronze, Custom Color
		<b>Trims</b> Standard, Snoot, Wall Wash, Decorative
<b>Dimming</b> TRIAC/ELV (120V): 1% DALI-2 (120/277V): 0.1%		<b>Ratings</b> <div><div></div>Wet Location / IP65 Rated Configurations Available</div>
<b>Standards</b> <div><div><div>JA8</div><div>TITLE 24</div></div><div><div>ENERGY STAR</div></div><div><div>UL</div><div>CERTIFIED</div><div>US-CA</div></div><div><div>Declare.</div></div></div>		<b>Guarantee</b> <div><div><div>5</div><div>YEARS</div></div><div><div>50k</div><div>HOURS</div></div></div>

NOTE: Please reference product Spec Sheets for complete ordering information



# M Series Cylinder

## Customization Unmatched in the Industry

By combining a suite of customizable features with our highest performing LED modules, the M Series Cylinder provides brilliant illumination and beautiful design versatile enough for whatever your project needs. The M Series Cylinder centers around our modular LED lighting system, so it's easy to specify, install and maintain.

- Customize your cylinder with over one million configurations
- Powered by DMF's advanced LED downlight technology
- Modular Twist & Lock trims and Plug & Play light engines allow for easy maintenance and on-site modifications
- Shadowless pendant uplight allows for direct and indirect lighting from a single cylinder



## Options & Accessories

Shades, trims, specialty options, even the light engine can all be swapped out in the field, giving you control during and after the installation.



### Uplight

Enables light output at elevated levels, while providing glare-free ambiance and the ability to highlight architectural elements.



### Snoot

Channels light source and decreases visual cutoff angle to increase focus and mitigate glare.



### Decorative Trim

Finely crafted acrylic subtly fills your space with beautiful ambient light.




### Hyperbolic Trim

Edgeless trim provides completely smooth, uniform light.



### Round & Flat Shades

Re-imagined for more diverse environments while creating a more focused and comfortable general light.

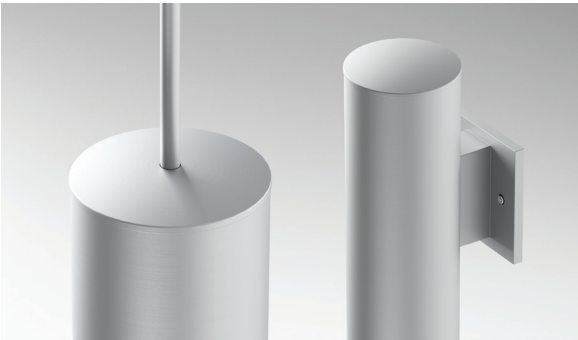

### Wet Location Rated

Available moisture protection options are IP65 and UL Listed as water-resistant and rated for outdoor use.





# M Series Cylinder




Pendant Mount




PRODUCT SPECS






- Integrated Drivers allow for down to 0.1% dimming options within the pendant and no need to locate anything above the canopy
- Shadowless pendant uplight allows for direct and indirect lighting from a single cylinder
- Die-cast aluminum trims with no visible hardware for a sleek, symmetrical design

<b>Mount</b> Cord, Stem	<b>Size</b> Diameter: 4" Height: Small (4"), Medium (8"), Large (12")	<b>Dimming</b> 0-10V (120/277V): 1%, TRIAC/ELV (120V): 1%, DALI-2 (120/277V): 0.1%	
<b>Input</b> 120/277V	<b>Color Quality</b> 93 CRI, 2-step SDCM	<b>Canopy</b> Standard	<b>Specialty Lens</b>  Hexcell Louver

<b>Color Temperature</b> <div> 2700K  3000K</div> <div> 3500K  4000K</div> <div> Warm Dim, 3000–1800K</div> <div> Tunable White, 4000–1800K</div>	<b>Beam Spread</b> <div> 15° Narrow Spot</div> <div> 25° Spot</div> <div> 40° Flood</div> <div> 60° Wide Flood</div> <div> 90°+ General</div>
--	---

<b>Lighting Type</b> <div> Downlight  Up and downlight  Adjustable</div>	<b>Finish</b> White, Black, Brushed Aluminum, Bronze, Custom Color
<b>Trims &amp; Shades</b> Standard, Snoot, Decorative, Hyperbolic, Flat Shade, Round Shade	

<b>Lumen Output</b> 750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W), 1500 lm (16.5W), 2000 lm (24.5W), 2500 lm (27.5W), 3000 lm (34W)	<b>Ratings</b> <div> Wet Location / IP65 Rated Configurations Available</div> <div> NSF Listed (White and Black Finish Only)</div> <div> DarkSky Approved (Downlight with non-decorative trims only, CCT less than or equal to 3000K)</div>
--	---


<b>Standards</b> <div>     </div>	<b>Guarantee</b> <div> 5 YEARS  50k HOURS</div>
--	--

NOTE: Please reference product Spec Sheets for complete ordering information



# M Series Cylinder

Surface Mount




- Integrated Drivers allow for down to 0.1% dimming options within the pendant and no need to locate anything above the canopy
- Attaches directly to a surface or recessed mounted junction box, ideal for areas with limited ceiling height & plenum space restrictions
- Die-cast aluminum trims with no visible hardware for a sleek, symmetrical design

<b>Mount</b> Surface	<b>Size</b> Diameter: 4" Height: Medium (8"), Large (12")	<b>Dimming</b> 0-10V (120/277V): 1%, TRIAC/ELV (120V): 1%, DALI-2 (120/277V): 0.1%
<b>Input</b> 120/277V	<b>Color Quality</b> 93 CRI, 2-step SDCM	<b>Canopy</b> Standard
<b>Color Temperature</b> <div><div><div><div></div><div>2700K</div></div><div><div></div><div>3000K</div></div><div><div></div><div>3500K</div></div><div><div></div><div>4000K</div></div><div><div></div><div>Warm Dim, 3000–1800K</div></div><div><div></div><div>Tunable White, 4000–1800K</div></div></div></div>		<b>Beam Spread</b> <div><div><div><div></div><div>15° Narrow Spot</div></div><div><div></div><div>25° Spot</div></div><div><div></div><div>40° Flood</div></div><div><div></div><div>60° Wide Flood</div></div><div><div></div><div>90°+ General</div></div></div></div>
<b>Lighting Type</b> <div><div><div></div><div>Downlight</div></div><div><div></div><div>Adjustable</div></div></div>	<b>Specialty Lens</b> <div><div><div></div><div>Hexcell Louver</div></div></div>	<b>Finish</b> White, Black, Brushed Aluminum, Bronze, Custom Color
		<b>Trims</b> Standard, Snoot, Wall Wash, Decorative, Hyperbolic
<b>Lumen Output</b> 750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W), 1500 lm (16.5W), 2000 lm (24.5W), 2500 lm (27.5W), 3000 lm (34W)		<b>Ratings</b> <div><div><div></div><div>Wet Location / IP65 Rated Configurations Available</div></div><div><div></div><div>NSF Listed (White and Black Finish Only)</div></div><div><div></div><div>DarkSky Approved (Downlight with non-decorative trims only, CCT less than or equal to 3000K)</div></div></div>
<b>Standards</b> <div><div><div><div></div><div>JA8 TITLE 24</div></div><div><div></div><div>ENERGY STAR</div></div><div><div></div><div>CERTIFIED US-CA</div></div><div><div></div><div>Declare.</div></div><div><div></div><div>NSF</div></div><div><div></div><div>DARKSKY APPROVED Reduces light pollution Certified by DarkSky.org</div></div></div></div>		<b>Guarantee</b> <div><div><div></div><div>5 YEARS</div></div><div><div></div><div>50k HOURS</div></div></div>

# M Series Cylinder

Wall Mount

PRODUCT SPECS



- Integrated Drivers allow for down to 0.1% dimming options within the pendant and no need to locate anything above the canopy
- Shadowless pendant uplight allows for direct and indirect lighting from a single cylinder
- Die-cast aluminum trims with no visible hardware for a sleek, symmetrical design

<b>Mount</b> Wall Mount	<b>Size</b> Diameter: 4" Height: Medium (8"), Large (12")	<b>Dimming</b> 0-10V (120/277V): 1%, TRIAC/ELV (120V): 1%, DALI-2 (120/277V): 0.1%
<b>Input</b> 120/277V	<b>Color Quality</b> 93 CRI, 2-step SDCM	<b>Bracket</b> Standard, Slim
<b>Color Temperature</b> <div><div><div><div></div><div>2700K</div></div><div><div></div><div>3000K</div></div><div><div></div><div>3500K</div></div><div><div></div><div>4000K</div></div><div><div></div><div>Warm Dim, 3000–1800K</div></div><div><div></div><div>Tunable White, 4000–1800K</div></div></div></div>		<b>Beam Spread</b> <div><div><div><div></div><div>15° Narrow Spot</div></div><div><div></div><div>25° Spot</div></div><div><div></div><div>40° Flood</div></div><div><div></div><div>60° Wide Flood</div></div><div><div></div><div>90°+ General</div></div><div><div></div><div>40° x 20° Linear Spread</div></div><div><div></div><div>Soft Focus</div></div></div></div>
<b>Specialty Lens</b> <div><div><div></div><div>Hexcell Louver</div></div></div>		
<b>Lighting Type</b> <div><div><div></div><div>Downlight</div></div><div><div></div><div>Up and downlight</div></div><div><div></div><div>Adjustable</div></div></div>	<b>Finish</b> White, Black, Brushed Aluminum, Bronze, Custom Color	
	<b>Trims</b> Standard, Snoot, Wall Wash, Decorative, Hyperbolic	
<b>Lumen Output</b> 750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W), 1500 lm (16.5W), 2000 lm (24.5W), 2500 lm (27.5W), 3000 lm (34W)		<b>Ratings</b> <div><div><div></div><div>Wet Location / IP65 Rated Configurations Available</div></div><div><div></div><div>NSF Listed (White and Black Finish Only)</div></div><div><div></div><div>DarkSky Approved (Downlight with non-decorative trims only, CCT less than or equal to 3000K)</div></div></div>

**Standards**

JA8  
TITLE 24

ENERGY STAR

CERTIFIED  
US-CA

Declare.

NSF

DARKSKY  
APPROVED  
Reduces light pollution  
Certified by DarkSky.org

**Guarantee**

5  
YEARS

50k  
HOURS



NOTE: Please reference product Spec Sheets for complete ordering information



# DRD5S

Surface Mount System

OVERVIEW

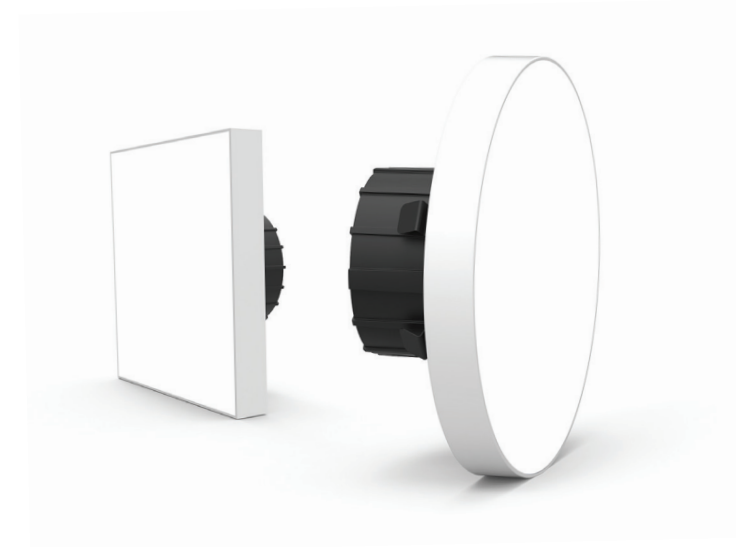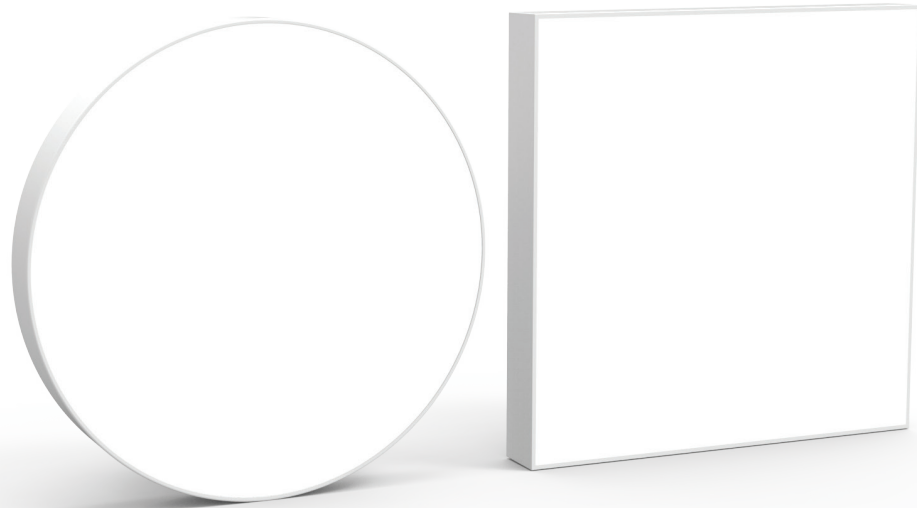

## 4" Round or Square

The DRD5S's minimal design is available in multiple form factors, with the 4" Round and Square matching the appearance of high-end recessed lights.

## 8" Round

This minimalist downlight takes everything that makes the original DRD5S exceptional, and expands on it. This area light can fill a room with inviting, accurate illumination. In addition, its SurfaceFrame compatibility simplifies installation and makes it totally interoperable with the rest of the DRD5S family.



## Surface Meets Substance

The DRD5S redefines what's possible for a surface mount downlight. Packed with technical breakthroughs, the ultra-thin DRD5S matches the elegance of a high-end recessed downlight. In addition, it's more versatile because it can fit more applications, even those with limited plenum space.

- Edgeless design disappears into the ceiling
- Clear, uniform light – no dark spots
- Ultra-thin form factor extends just 0.6" from the ceiling plane
- Snaps into place for easy installation that's completely flush with the ceiling
- Proprietary driver with smooth dimming capability down to 5%


## 18" Linear

A fresh take on the DRD5S, this linear area light delivers 1500 lumens of 90+ CRI light in a unique form factor. Like our other downlights in this series, the linear version features a proprietary integrated driver and small footprint, making it a great choice for new construction or retrofit applications.



DRD5S

4" Surface Mount

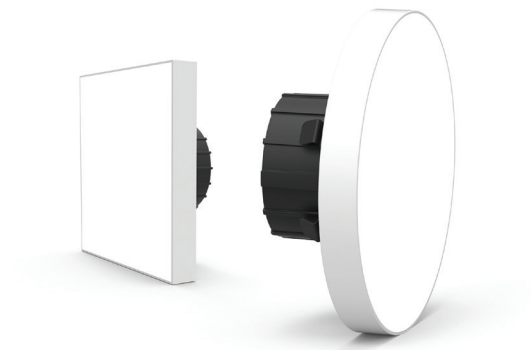

- Thinnest in its class, extends just 0.6" from the ceiling plane
- Clear uniform light, no dark spots
- 90+ CRI LED standard, and produces up to 1000 lumens of exceptional light
- Snaps into place for easy installation and maintenance
- Proprietary-integrated driver with smooth dimming capability down to 5%

DRD5S

8" Surface Mount



- 8" round area light for lighting smaller spaces including bathrooms, closets, and kitchens
- Extends just 0.6" below the ceiling plane to minimize visual profile
- Integrated driver provides down to 5% dimming capability and simplifies maintenance

<b>Application</b> Retrofit	<b>Aperture</b> 4"	<b>Input Voltage</b> 120/277V for 0-10V only
<b>Compatible Housings</b> 4O Octagonal, 4O Round, 3O Round (minimum 2 3/4" depth)	<b>Color Quality</b> 90+ CRI, < 3-step SDCM	<b>Ceiling Material</b> Drywall, Millwork
<b>Delivered Lumens</b> 750lm (9.0W),1000 lm (12.0W) 1500 lm (17W)	<b>Dimming</b> TRIAC/ELV 5%, 0-10V 1%	<b>Shape</b> Round, Square
<b>Color Temperatures</b> <div><div></div> 2700K<div></div> 3000K<div></div> 3500K</div>		<b>Beam Spread</b> <div></div> General
<b>Standards</b> <div><div>JA8 TITLE 24</div><div>ENERGY STAR</div><div>UL CERTIFIED US-CA</div><div>Declare.</div></div>	<b>Ratings</b> <div><div></div> Wet Location<div></div> Closet Rating Compliant (750 lm only)</div>	<b>Guarantee</b> <div><div>5 YEARS</div><div>50k HOURS</div></div>

<b>Application</b> New Construction	<b>Aperture</b> 4" Octagonal Junction Box	<b>Input Voltage</b> 120/277V
<b>Compatible Housings</b> F4NC	<b>Color Quality</b> 90+ CRI, < 3-step SDCM	<b>Ceiling Material</b> Drywall, Millwork
<b>Delivered Lumens</b> 1500 lm (17W)	<b>Dimming</b> TRIAC/ELV 5%, 0-10V 1%	<b>Shape</b> 8" Round
<b>Color Temperatures</b> <div><div></div> 2700K<div></div> 3000K<div></div> 3500K</div>		<b>Beam Spread</b> <div></div> General
<b>Standards</b> <div><div>JA8 TITLE 24</div><div>ENERGY STAR</div><div>UL CERTIFIED US-CA</div><div>Declare.</div></div>	<b>Ratings</b> <div><div></div> Wet Location</div>	<b>Guarantee</b> <div><div>5 YEARS</div><div>50k HOURS</div></div>



DRD5S

18" Linear Surface Mount



- 18" x 4" linear area light perfect for narrow applications such as corridors or kitchen islands
- Extends just 0.6" below the ceiling plane to minimize visual profile
- Integrated driver provides down to 5% dimming capability and simplifies maintenance

DRD5S

Surface Mount System

INSTALLATION OPTIONS

DRD5S Installation Options



NEW CONSTRUCTION

F4NC Surface Mount Housing



RETROFIT

Compatible Junction Boxes



JUNCTION BOX	MIN. DEPTH	MIN. VOLUME	THROUGH-WIRE RATING
4O Octagonal (metallic)	2 1⁄8 in	21.5 in³	6 (three in, three out) #12 AWG
3O Round (non-metallic)	2 3⁄4 in	18 in³	6 (three in, three out) #12 AWG
4O Round (non-metallic)	2 3⁄16 in	20 in³	6 (three in, three out) #12 AWG



	Artafex 2" Downlight	Artafex 2" Adjustable	Artafex 4" Downlight	Artafex 4" Adjustable	DRD5S Surface Mount
APPLICATION	New Construction, Remodel, Retrofit	New Construction, Remodel, Retrofit	New Construction, Remodel, Retrofit	New Construction, Remodel, Retrofit	New Construction, Retrofit
HOUSING	Artafex Flangeless; X Series	Artafex Flangeless; X Series	M Series; Surface Mount; 4" Cylinder; 4", 5", 6" Retrofit	M Series; 4" Cylinder; Multiples	Surface Mount; Metallic Octagonal; or Non-Metallic Round Junction Box
ADJUSTMENT	–	360° directional aim, 35° tilt	–	360° directional aim, 45° tilt	–
DELIVERED LUMENS	750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W)	750 lm (12.5W), 1000 lm (14.3W)	750 lm (9.5W), 1000 lm (12.5W ), 1250 lm (14.3W), 1500 lm (16.5W)	750 lm (9.5W), 1000 lm (12.5W )	4": 750 lm (9.0W), 1000 lm (12.0W) 8"/18": 1500 lm (17.0W)
COLOR QUALITY	True Spectrum™	True Spectrum™	True Spectrum™	True Spectrum™	90+ CRI, < 3-step SDCM
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K, Warm Dim (3000-1800K), Tunable White (4000-1800K)	2700K, 3000K, 3500K, 4000K, Warm Dim (3000-1800K), Tunable White (4000-1800K)	2700K, 3000K, 3500K, 4000K, Warm Dim (3000-1800K), Tunable White (4000-1800K)	2700K, 3000K, 3500K, 4000K, Warm Dim (3000-1800K), Tunable White (4000-1800K)	2700K, 3000K, 3500K
DIMMING	TRIAC/ELV (1%, 120V only), DALI-2 (0.1%)	TRIAC/ELV (1%, 120V only), DALI-2 (0.1%)	TRIAC/ELV (1%, 120V only), EcoSystem (1%), DALI-2 (0.1%)	TRIAC/ELV (1%, 120V only), DALI-2 (0.1%)	TRIAC/ELV 5%
BEAM SPREAD	20° Narrow Spot, 30° Spot, 40° Flood, 50° Wide Flood, 50°x30° Linear Spread	20° Narrow Spot, 30° Spot, 40° Flood, 50° Wide Flood, 50°x30° Linear Spread	15° Narrow Spot, 25° Spot, 40° Flood, 60° Wide Flood, 90°+ General Ambient, 40° x 20° Linear Spread, Soft Focus	15° Narrow Spot, 25° Spot, 40° Flood, 60° Wide Flood, 60° x 30° Linear Spread, Soft Focus	Flood
OPTIONS	-	-	-	Black, White Surround	4" Round, 4" Square, 8" Round, 18" Linear
INPUT VOLTAGE	120/277V	120/277V	120/277V	120/277V	4": 120V; 8"/18": 120/277V
STANDARDS	JA8 Title 24, UL Certified US-CA, ENERGY STAR®, Declare	JA8 Title 24, UL Certified US-CA, ENERGY STAR®, Declare	JA8 Title 24, UL Certified US-CA, ENERGY STAR®, Declare	JA8 Title 24, UL Certified US-CA, ENERGY STAR®, Declare	JA8 Title 24, UL Certified US-CA, ENERGY STAR®, Declare
RATINGS	Wet Location	Damp Location	Wet Location	Damp Location	Wet Location
DMF PROMISE	Yes	Yes	Yes	Yes	–
WARRANTY	10 years	10 years	10 years	10 years	5 years



## DMF Lighting

1118 East 223rd Street  
Carson, CA 90745  
323.934.7779  
info@dmfLuxury.com  
dmfLuxury.com

