



*luxury*

# Product Guide

2025 | V 1.0

**dmf**

# Table of *contents*

4

Brilliance  
Engineered

---

6

Our Promise

---

8

Artafex

---

12

Introducing  
PhaseX

---

16

Introducing  
Linear

---

22

Artafex 2

---

36

Artafex 4

---

54

Multiples

---

58

Surface  
Mount

---

64

Comparison  
Chart

---





# Brilliance *engineered*

DMF Lighting designs and builds modular downlighting solutions that lead the industry in quality, flexibility, and superior performance. For nearly 40 years, our dedicated engineers in Carson, California, have developed a range of products that reimagine the possibilities of premium lighting and its impact on the look and feel of your home.

We are committed to rigorous research and development, which has driven numerous innovations in illumination. This commitment to continuous improvement keeps DMF Lighting at the forefront of innovation in premium lighting solutions.

Our exclusive line of luxury lighting products, Artafex, is designed and engineered to elevate the beauty and comfort of your home. Whether highlighting artwork, accentuating architectural details, or precisely rendering the colors and textures of a room, Artafex ensures your home looks—and feels—the way it should.

*The art of engineering  
is at the heart of our company.*

# Unmatched *quality and support*

DMF Lighting is proud to provide outstanding products and solutions to custom integrators. We believe these products provide the best solution for your lighting projects and are so confident that we are pledging **The DMF Promise** – Guaranteed Reliability, Guaranteed Compatibility, and Guaranteed Support. This promise is a natural extension of our commitment to you.



## *Guaranteed Reliability*

We proudly offer outstanding products and solutions, backed by an industry-best warranty of 10 years on all of our downlight modules.

## *Guaranteed Compatibility*

We guarantee seamless compatibility with all major local and centralized lighting control systems specified by our customers.

## *Guaranteed Support*

In addition to our general customer support, you can directly connect with a DMF engineer at our Los Angeles office for technical questions.






**Artafex**

## Artful lighting for *everyday luxury*

Artafex, an exclusive line of award-winning lighting products, is designed to meet the demands of modern custom integrators and elevate their projects to a new level of elegance and style. Showcasing a seamless blend of form and function, Artafex sets a new standard for luxury and versatility and is available exclusively for custom integrators who demand the finest in lighting innovation.



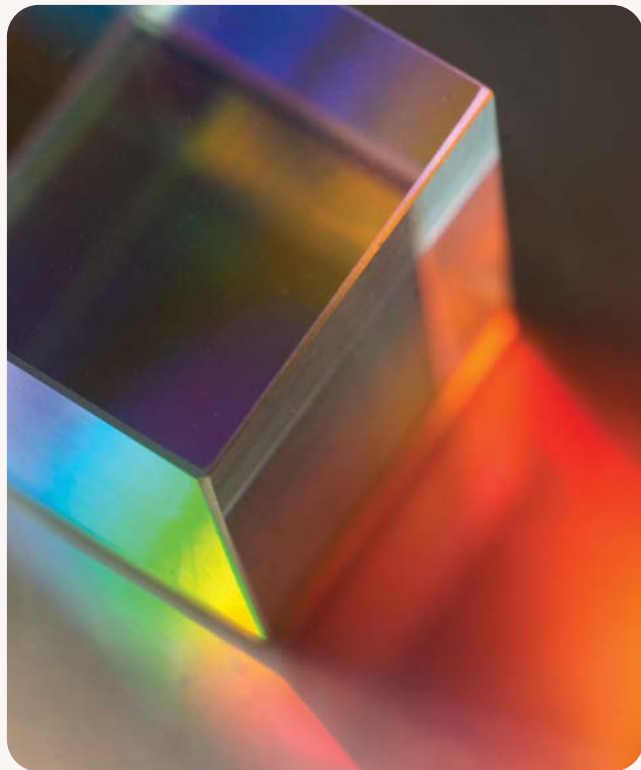

### True Spectrum®

#### Exceptional ability *to display colors*

The culmination of studying 99 variations of color to create light engines that are exceptional in their ability to effectively display colors as they appear under natural light. Artafex modules feature True Spectrum® high CRI LED technology.



#### Committed *to innovation*

Artafex continues to evolve – with the expansion of Artafex Linear and PhaseX Digital, staying true to its commitment to artistry and precision. These innovations provide custom integrators with seamless integration and advanced control, elevating every project with cutting-edge technology, sophisticated design, and dynamic features.

## Artafex

2024

CEDIA Smart Home Awards  
Best New Hardware Product, Global  
Winner

2024

Technology Designer  
Performance Home Awards  
Best Product

2024

Residential Systems  
CEDIA Best of Show  
Winner

2024

ResTech  
Innovation Award  
Finalist

Award-winning  
*performance*




PhaseX



## A giant leap *in tunable white*

PhaseX brings digital lighting to DMF's Artafex recessed lighting families using standard electrical wiring, offering tunable white lighting, 0.1% dimming, and flexible zoning. The compact PhaseX Gateway ensures fast communication and precise control, enhancing the lighting experience with modern, dynamic features.

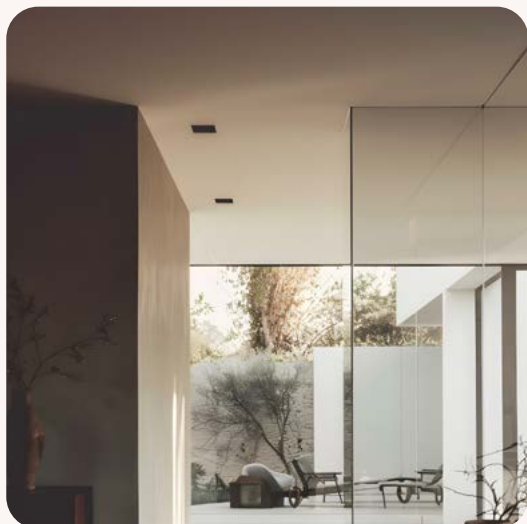



# Digital illumination simplified

PhaseX combines the simplicity of a wireless solution, the reliability of wired systems, and the flexibility of open protocols to deliver unparalleled performance and adaptability.

## Adapts to your *daily rhythms*

Soft zoning that allows you to fine-tune lighting scenes and groupings without rewiring, and precise 0.1% dimming for ultimate ambiance control.

## Robust, scalable *solution*

Available for Artafex 2 and Artafex 4, delivering premium lighting at a reasonable cost and empowering you to bring more digital projects to life.

PhaseX



ART-GWX

### Summary

- Designed for use with Artafex PhaseX enabled fixtures.
- Provides full control of up to 64 PhaseX lighting fixtures via standard electrical wiring.
- Interfaces with lighting control systems using the industry-standard DMX/RDM protocol.
- Unlocks the benefits of digital control and tunable white lighting.

### Electrical

- AC Input** Screw terminals for AC Line and Neutral. Max. 12 AWG Wire.
- AC Output** Screw Terminals for AC Line Out & Neutral Out. Max. 12 AWG wire.
- DMX Input** (2) 3-Position Pluggable Terminal Block. (DMX+, DMX-, G)

### Features

- Ultra reliable, 2-way communication
- DIN Rail mountable into standard electrical enclosures
- Direct Integration to Crestron Home via DMX-C (Requires DIN-GWDL Gateway from Crestron)

- USB** Micro-USB Connection for use with PhaseX Commissioning Utility
- Contact Closure** (2) Contact Closure Inputs (CC1, CC2, G) (Reserved for future use)

### Power & Controls

- Input Voltage 120VAC, 60Hz
- Output Current Max. 8A

### Compliance

- UL508, UL8750



# Artafex Linear



## A new approach *to linear lighting*

Our newest home illumination solution for custom integrators, designed to provide a premium-performance, easy-to-install alternative to traditional linear. Designed for custom integrators, it brings DMF's hallmark modularity and flexibility to linear lighting. Seamlessly integrating into architectural features, it suits ambient, accent, and task lighting applications. Magnetic connectors ensure quick, solder-free installation.

# Convenience *factor*

The Linear Kit includes a selection of accessories curated to allow you to achieve the vast majority of applications without ordering separate accessory kits.



# Curated color *and dimming*


192 high-efficacy LEDs per foot deliver perfect blending and color that integrates seamlessly with our downlight products.



# Easy installation *and serviceability*

Simple magnetic connections with no soldering required. A modular design allows you to service just one component, not the entire run.

# Artafex Linear

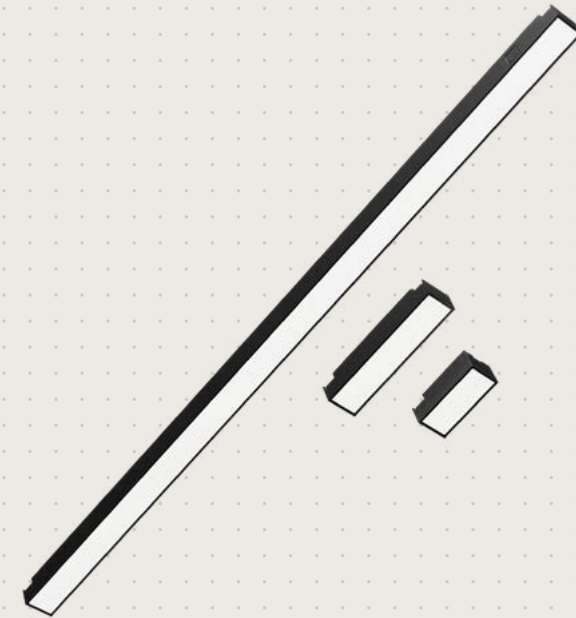

## Installation

**Mounting**  
Surface Mount:  
Flat Field-Cutttable Mounting Track  
45° Field-Cutttable Mounting Track  
*Mounting Tracks may be recessed in Millwork*

**Run Length**  
Min. 3' per Driver  
Max. 20' per Driver

## Physical

**Dimensions**  
1/2" x 1/2" Profile

**Finish**  
Black Anodized

## Light Output & Distribution

**Lumens (Power)**  
360lm/ft (4W)

**Color Quality**  
95 CRI

## Power & Controls

**Input Voltage**  
Fixture: 48VDC  
Driver: 100-277VAC

**Dimming**  
TRIAC/ELV (0.5%) 120V *only*

**Home Run Length**  
Max. 200' with 16/2 Wire  
Max. 75' with 18/2 Wire

## Color Temperature

**Default:**  
Warm Dim (3000K-1800K)

**User Selectable:**  
2000K 2700K 3000K

## Beam Spread



# Artafex Linear

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS

## Kit



Includes: 12" Fixture Segment with Middle Connector (10), 2" Fixture Segment (4), 1" Fixture Segment (1), Input Connector (2), Middle Connector (3), Dead End Cover (1), 24" Jumper (1), 6" Jumper (1)

**ART05L-1203WD10**  
Linear Kit (10ft)

## Driver



**ARTP-4896T1**  
Linear Single Output Driver

## Fixtures



**ART05L-1203WD01**  
Linear 12" Fixture Segment with Middle Connector



**ART05L-0103WD10**  
Linear 2" Fixture Segment (10-Pack)



**ART05L-0203WD10**  
Linear 1" Fixture Segment (10-Pack)

## Mounting Tracks



Includes: 48" Flat Mounting Track (3), No.4½" Phillips Flat Head Wood Screws (30), Track Alignment Tool (1)

**ART05L-FL03**  
Linear Flat Mounting Track Kit (12ft)



**ART05L-FL03**  
Linear 45° Mounting Track Kit (12ft)

Includes: 48" 45° Mounting Track (3), No.4½" Phillips Flat Head Wood Screws (30), Track Alignment Tool (1)

## Accessories



**ART05L-PF10**  
Linear Input Connector (10-Pack)



**ART05L-JN10**  
Linear Middle Connector (10-Pack)



**ART05L-J0605**  
Linear 6" Jumper (5-Pack)



**ART05L-J0126**  
Linear 24" Jumper (5-Pack)



**ART05L-DE10**  
Linear Dead End Cover (10-Pack)

## Artafex 2


### Gracefully *stylish*

Our award-winning small-aperture lighting solution is designed and engineered to keep ceilings quiet and uncluttered.



### Universal *housing*

**Artafex 2** versatile X Series housings accommodate both fixed and adjustable modules. Its innovative pull-down latch simplifies serviceability, providing easy access to the splice and driver from below the ceiling. The latest addition to Artafex 2, a dedicated **Flangeless Housing**, can be installed using conventional drywall taping techniques to achieve a Level 5 finish.

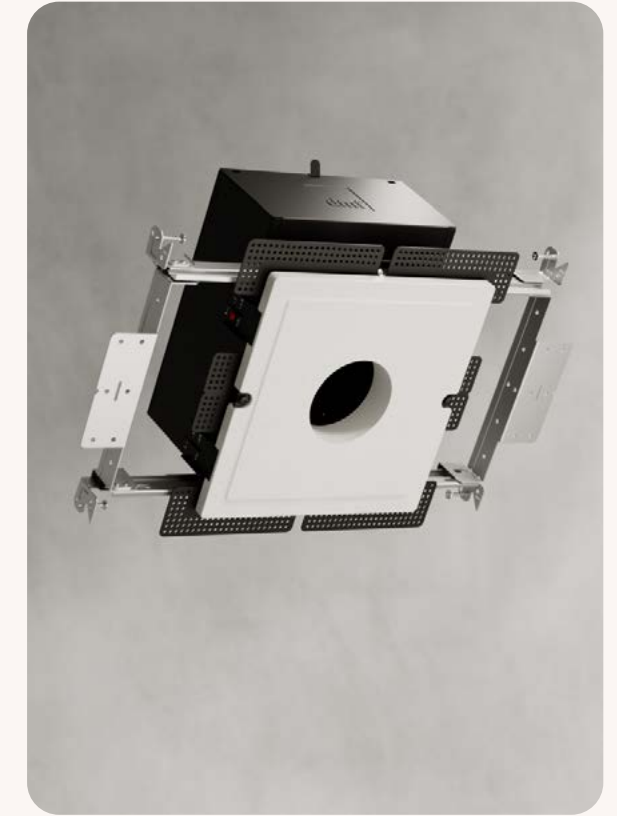

### Small aperture *modules*

The revolutionary Artafex 2 combines **True Spectrum®** technology and the performance of larger fixtures with the design of small aperture fixtures for a quiet ceiling. They deliver up to 1250 lm and are completely interchangeable. Swap lumens, color temperature, or optics all from below the ceiling.



### The key to *innovation*

A true innovation, our **Precision Lock Collars** eliminates over-cutting and ensures a flawless cutout, and error-free installation at a uniform depth.



## Designed *to disappear*

**Artafex 2** small aperture trim options are designed to complement or disappear into any space, creating quiet ceilings throughout the home. They are meticulously engineered to provide unmatched precision and exceptionally easy installation with DMF's convenient **Twist & Lock** system.

## Upgraded *illumination*

Upgrading your lamp source with a **Retrofit Solution** retains the existing above ceiling fixture and lighting layout while offering you improved color representation, advanced optics, 1% dimming, warm dim options, and compatibility with home automation systems.



FLANGELESS



MICRO FLANGE



DECORATIVE

- WHITE
- BLACK
- BRONZE
- CUSTOM





# Artafex 2 Downlight



## Installation

**Aperture**  
2"

**Ceiling Thickness**  
New Construction: 1/2" up to 1 1/4"  
Remodel: 1/2" up to 1 1/4"  
Retrofit

**Ceiling Material**  
Drywall, Millwork

## Trims

**Shape**  
Round, Square

**Style**  
Standard, Micro Flange, Flangeless, Wall Wash, Pinhole, Hyperbolic, Decorative

**Finish**  
White, Black, Bronze, Clear Diffuse, Custom Color

## Light Output & Distribution

**Module**  
Downlight

**Lumens (Power)**  
750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W)

**Color Quality**  
True Spectrum®

## Power & Controls

**Input Voltage**  
120/277V

**Dimming**  
PhaseX (0.1%), DALI-2 (0.1%)  
TRIAC/ELV (1%) *120V only*

## Color Temperature

- 2700K    ● 3000K
- 3500K    ● 4000K
- Warm Dim (3000K-1800K)
- Tunable White (4000K-1800K)

## Beam Spread

- ▲ Ultra Narrow Spot (10°)    ▲ Narrow Spot (20°)
- ▲ Spot (30°)    ▲ Flood (40°)
- ▲ Wide Flood (50°)    ▲ Linear Spread (50°x30°)



Declare.



UL Listed for Wet Location


# Artafex 2 Downlight *Round*

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS


## Trims



## Housings

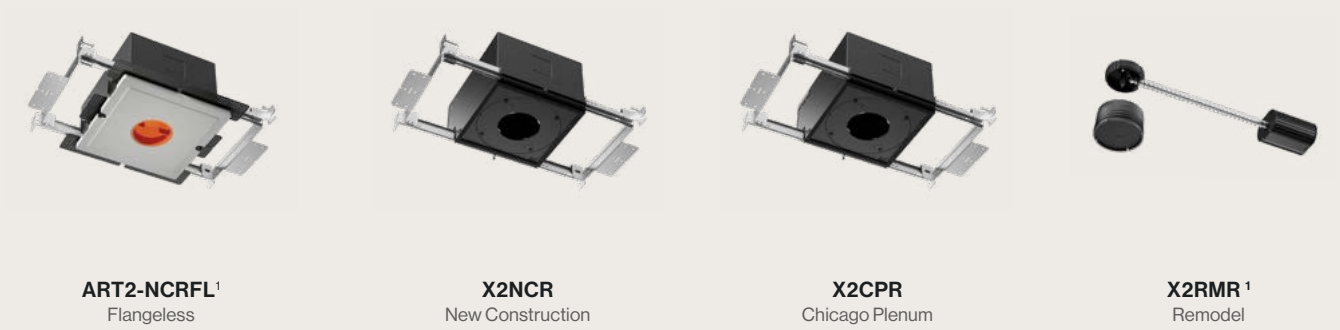

## Accessories

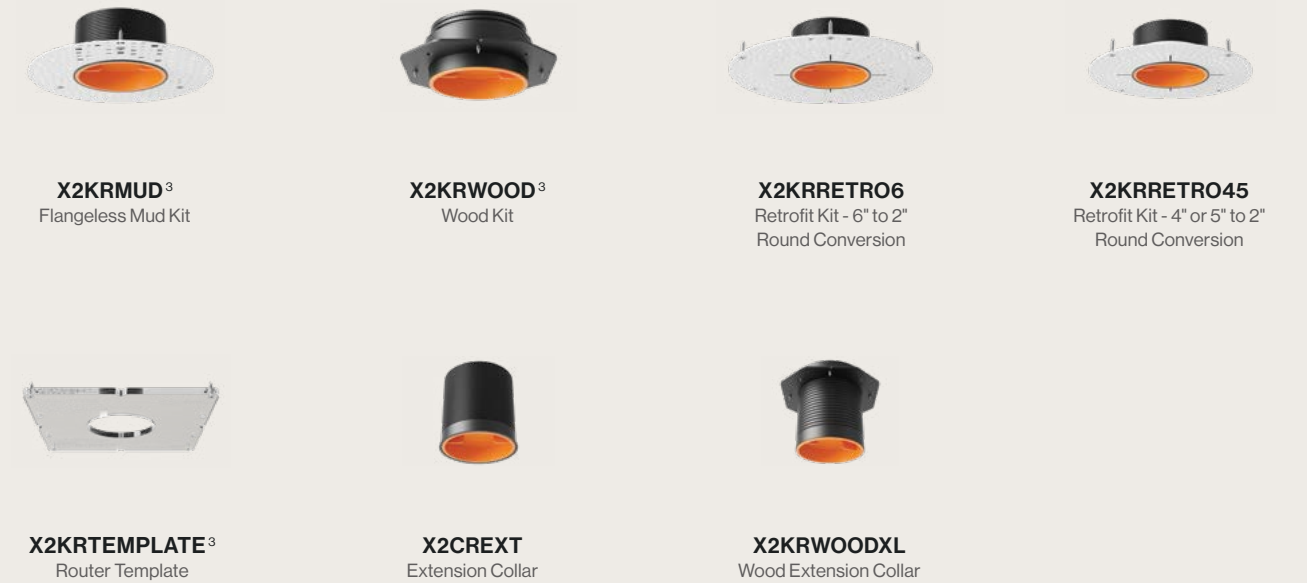


# Artafex 2 Downlight *Square*

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS


## Trims



## Housings

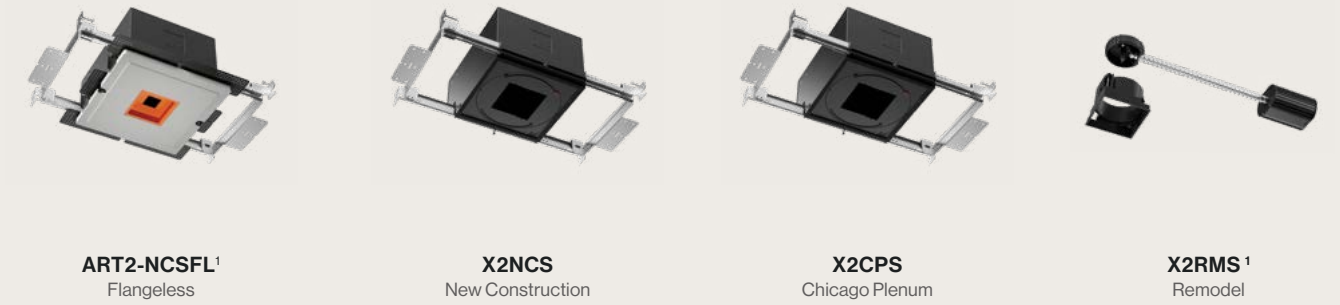

## Accessories

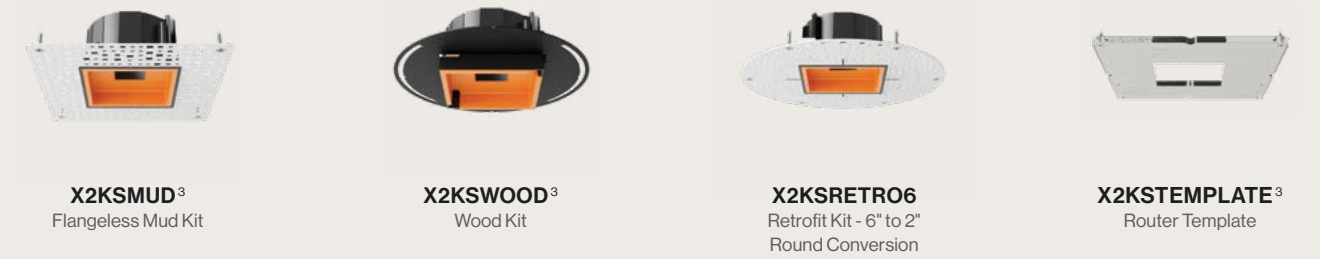





# Artafex 2 Adjustable



## Installation

**Aperture**  
2"

**Ceiling Thickness**  
New Construction: 1/2" up to 1 1/4"  
Remodel: 5/8" up to 1 1/4"  
Retrofit

**Ceiling Material**  
Drywall, Millwork

## Trims

**Shape**  
Round, Square

**Style**  
Standard, Micro Flange, Flangeless,  
Wall Wash, Pinhole

**Finish**  
White, Black, Bronze, Clear Diffuse,  
Custom Color

## Light Output & Distribution

**Module**  
Adjustable: 360° rotation, 35° tilt

**Lumens (Power)**  
750 lm (12.5W), 1000 lm (14.3W)

**Color Quality**  
True Spectrum®

## Power & Controls

**Input Voltage**  
120/277V

**Dimming**  
PhaseX (0.1%), DALI-2 (0.1%)  
TRIAC/ELV (1%) *120V only*

## Color Temperature

- 2700K    ● 3000K
- 3500K    ● 4000K
- Warm Dim (3000K-1800K)
- Tunable White (4000K-1800K)

## Beam Spread

- ▲ Narrow Spot (20°)    ▲ Spot (30°)
- ▲ Flood (40°)    ▲ Wide Flood (50°)
- ▲ Linear Spread (50°x30°)



Declare.




UL Listed for Damp Location

# Artafex 2 Adjustable *Round*


## Trims



## Housings

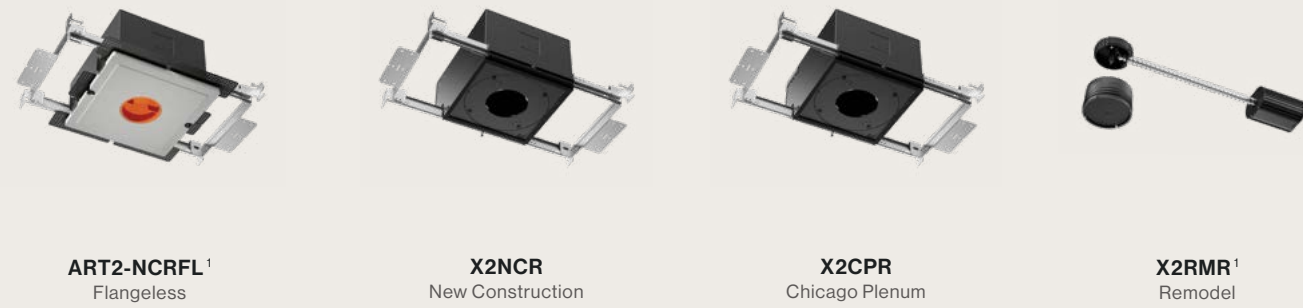


## Accessories

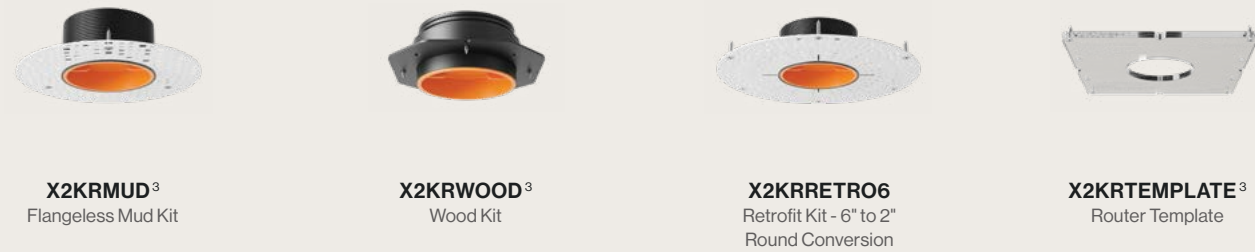


# Artafex 2 Adjustable *Square*


## Trims

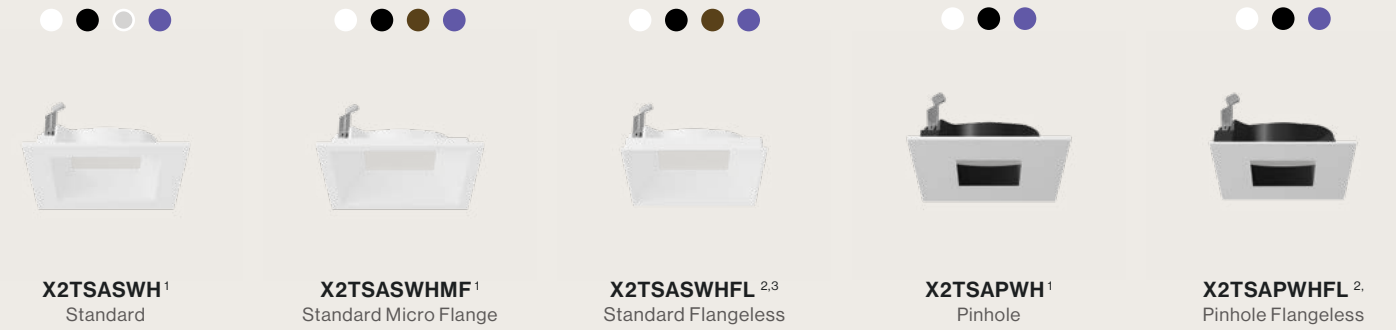

## Housings

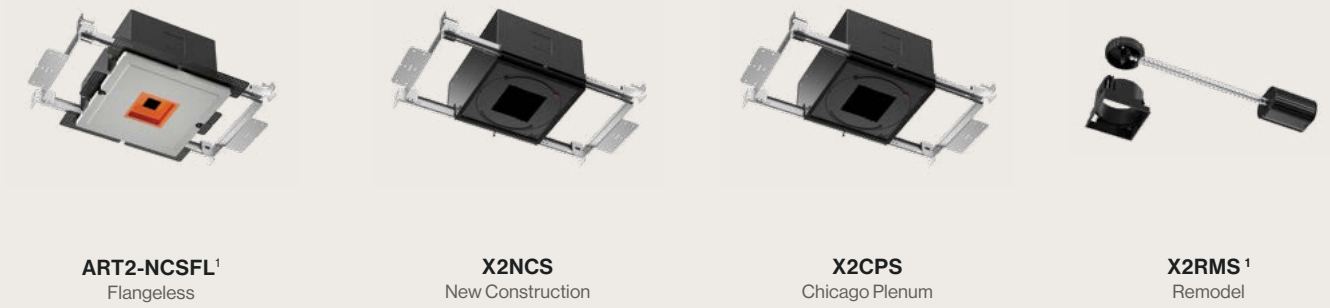

## Accessories

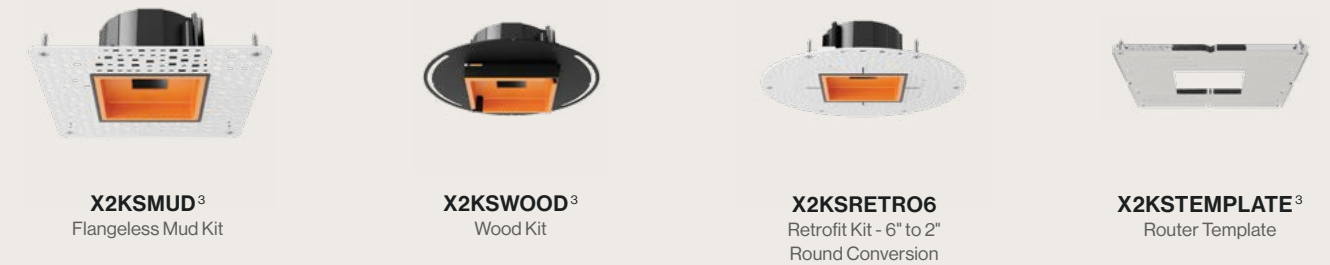

# Artafex 4

## Exceptional *versatility*

Our most multifaceted recessed lighting system with housings that work in almost all installations and ceiling designs, including concrete and low-profile




## Effortless *precision*

The **Artafex 4** modules with **True Spectrum®** technology deliver vibrant, accurate lighting that enhances any space. Designed for ease of use, they feature field-changeable optics, an integrated power system, and full 360° adjustability with 45° tilt for unmatched flexibility.

**Artafex 4** simplifies modern lighting design, offering effortless precision and elegance in every application.

## Flexible *housings*

**Artafex 4** offers over a dozen varieties of M Series housings, ensuring maximum flexibility for any project. This diverse selection allows for seamless integration into a wide range of architectural styles and use-cases. The latest addition, **Spray Foam Housing**, is specifically designed to meet the stringent standards of UL 1598 and current NFPA regulations.

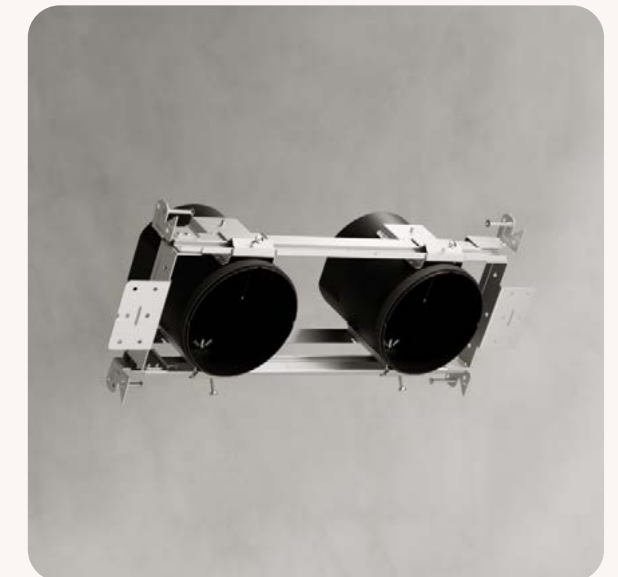




## Distinct *craftsmanship*

Our **Artafex 4** trims stand out with exceptional materials and finish, setting a new standard in the category. From wall wash to hyperbolic to pinhole, our trim designs accommodate any aesthetic, and with DMF's convenient **Twist & Lock** system, installation is easy with no tools required.

## Effortless *upgrade*

Retrofitting existing fixtures with DMF downlights is the quickest, most economical path to enhancing your space. Transform your existing fixture with new modules and **Retrofit Trims** in 6", 5", 4" apertures. Upgrading your lamp source with a retrofit solution offers you improved color representation, advanced optics, 1% dimming, warm dim options, and compatibility with home automation systems.

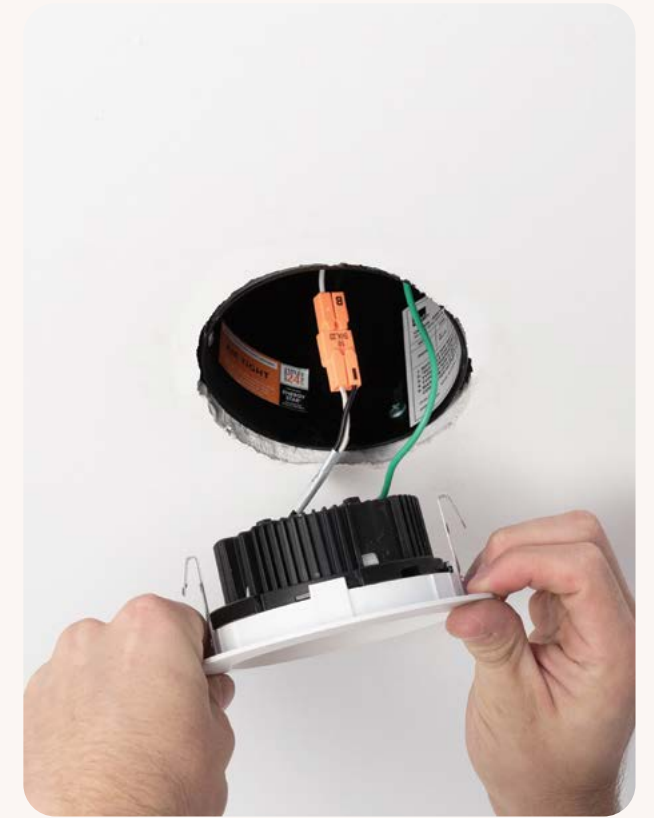

FLANGELESS



FLANGED



DECORATIVE



- WHITE
- BLACK
- BRONZE
- CLEAR DIFFUSE
- CUSTOM



## Seamless *transformation*

Artafex **Retrofit Conversion Kits** offer a sophisticated solution for transforming existing 6" fixtures into 4" downlights, with a variety of trim options to choose from.



# Artafex 4 Downlight



## Installation

**Aperture**  
4"

**Ceiling Thickness**  
New Construction: 1/2" up to 1 3/4"  
Remodel: 5/8" up to 1 1/4"  
Retrofit

**Ceiling Material**  
Drywall, Millwork

## Trims

**Shape**  
Round, Square

**Style**  
Standard, Flangeless, Wall Wash, Pinhole,  
Hyperbolic, Decorative

**Finish**  
White, Black, Bronze, Clear Diffuse,  
Custom Color

## Light Output & Distribution

**Module**  
Downlight

**Lumens (Power)**  
750 lm (9.5W), 1000 lm (12.5W ),  
1250 lm (14.3W), 1500 lm (16.5W)

**Color Quality**  
True Spectrum®

## Power & Controls

**Input Voltage**  
120/277V

**Dimming**  
PhaseX (0.1%), DALI-2 (0.1%)  
TRIAC/ELV (1%) *120V only*

## Color Temperature

- 2700K ● 3000K
- 3500K ● 4000K
- Warm Dim (3000K-1800K)
- Tunable White (4000K-1800K)

## Beam Spread

-  Narrow Spot (15°)
-  Spot (25°)
-  Flood (40°)
-  Wide Flood (60°)
-  General (90°+)
-  Linear Spread (40°x20°)
-  Soft Focus



Declare.




UL Listed for Wet Location


# Artafex 4 Downlight *Round*

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS


## Trims

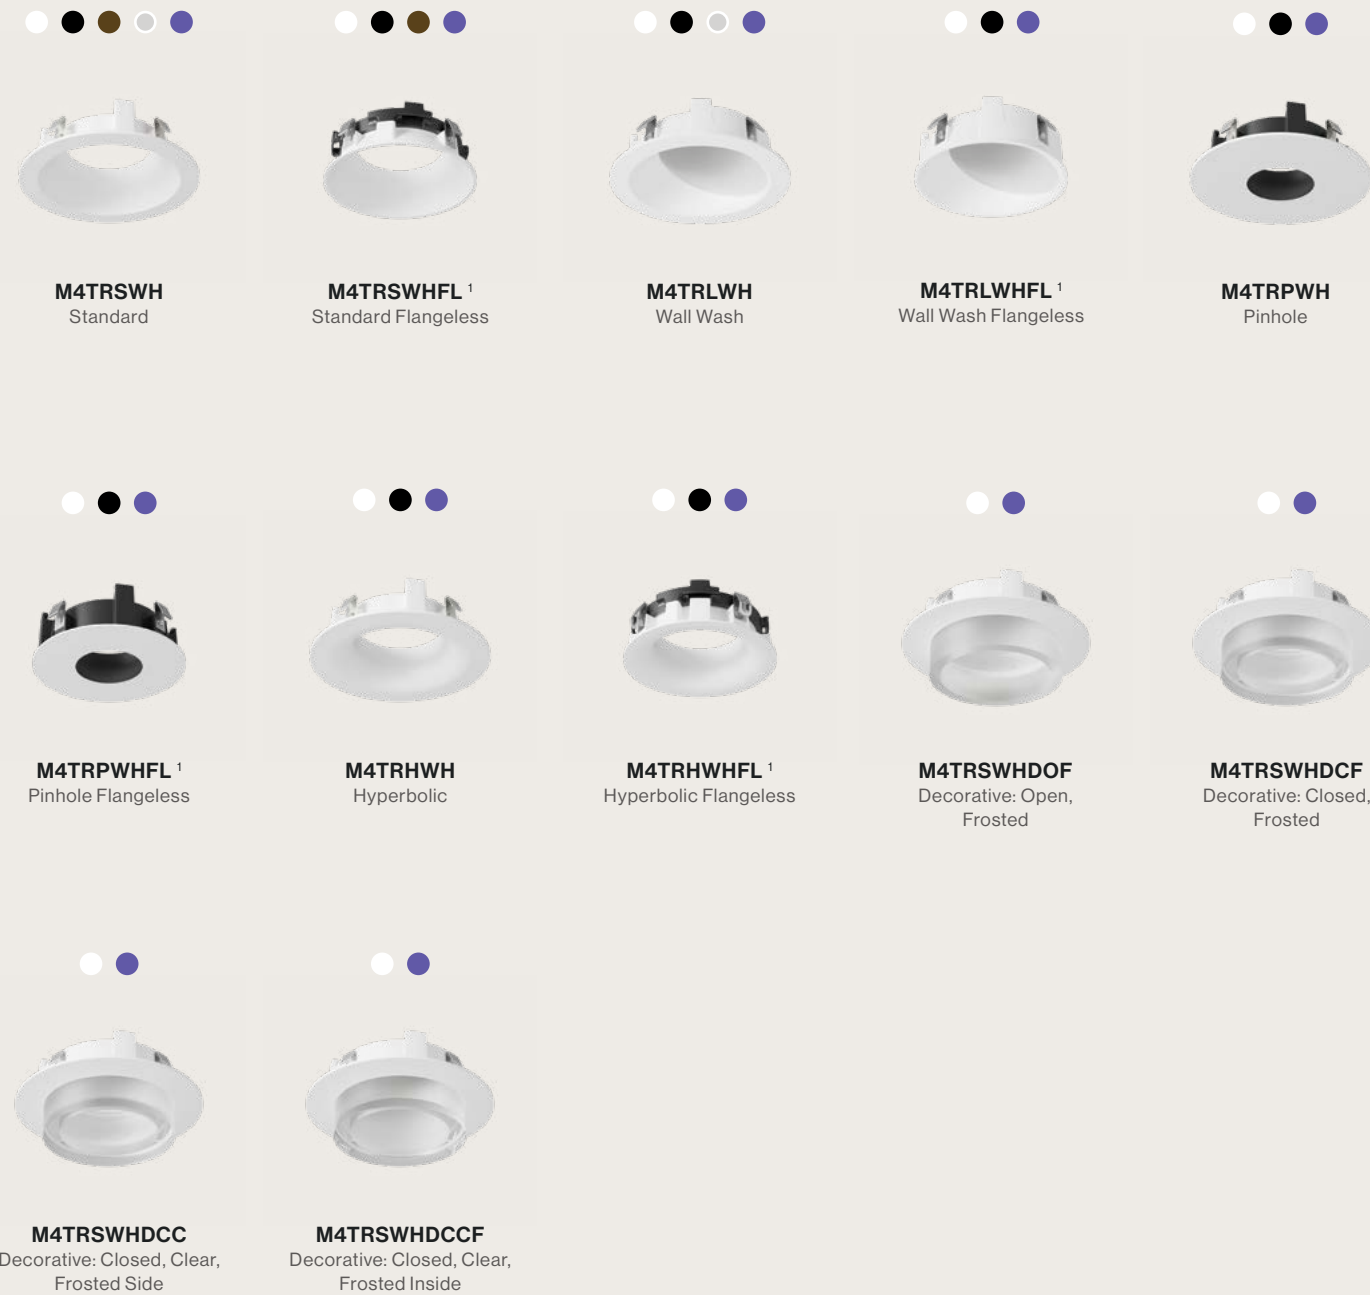

## Housings

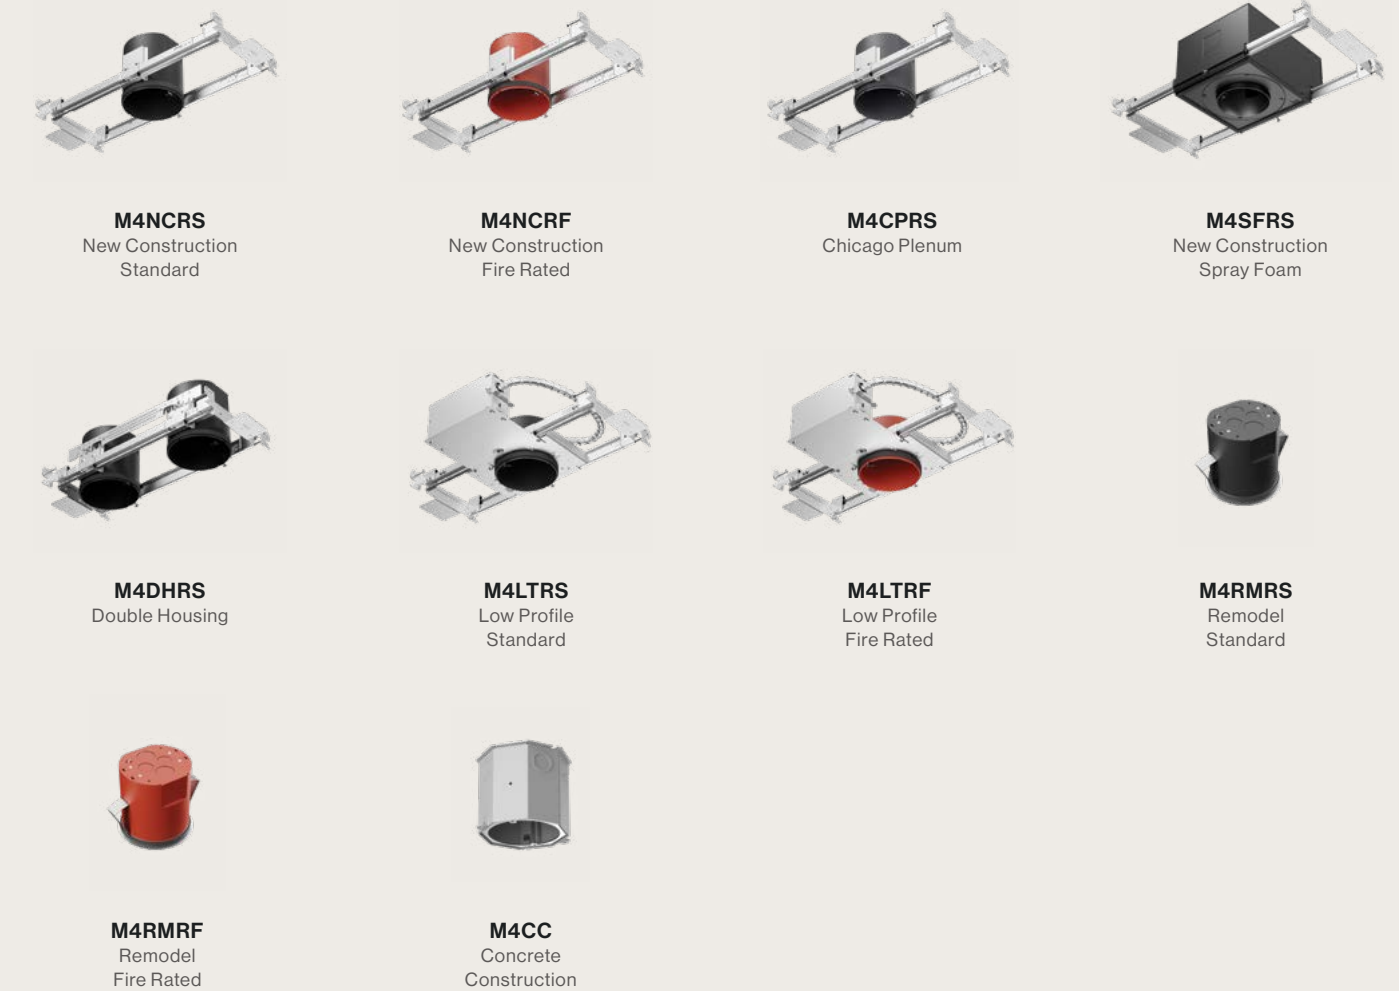


## Accessories

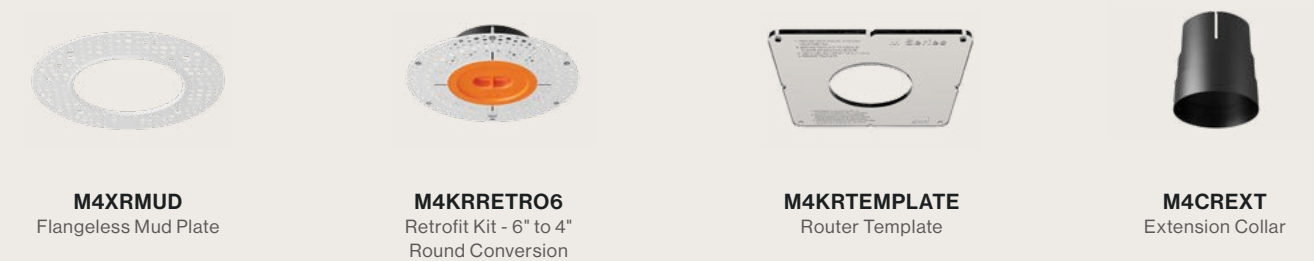


# Artafex 4 Downlight *Square*

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS

## Trims

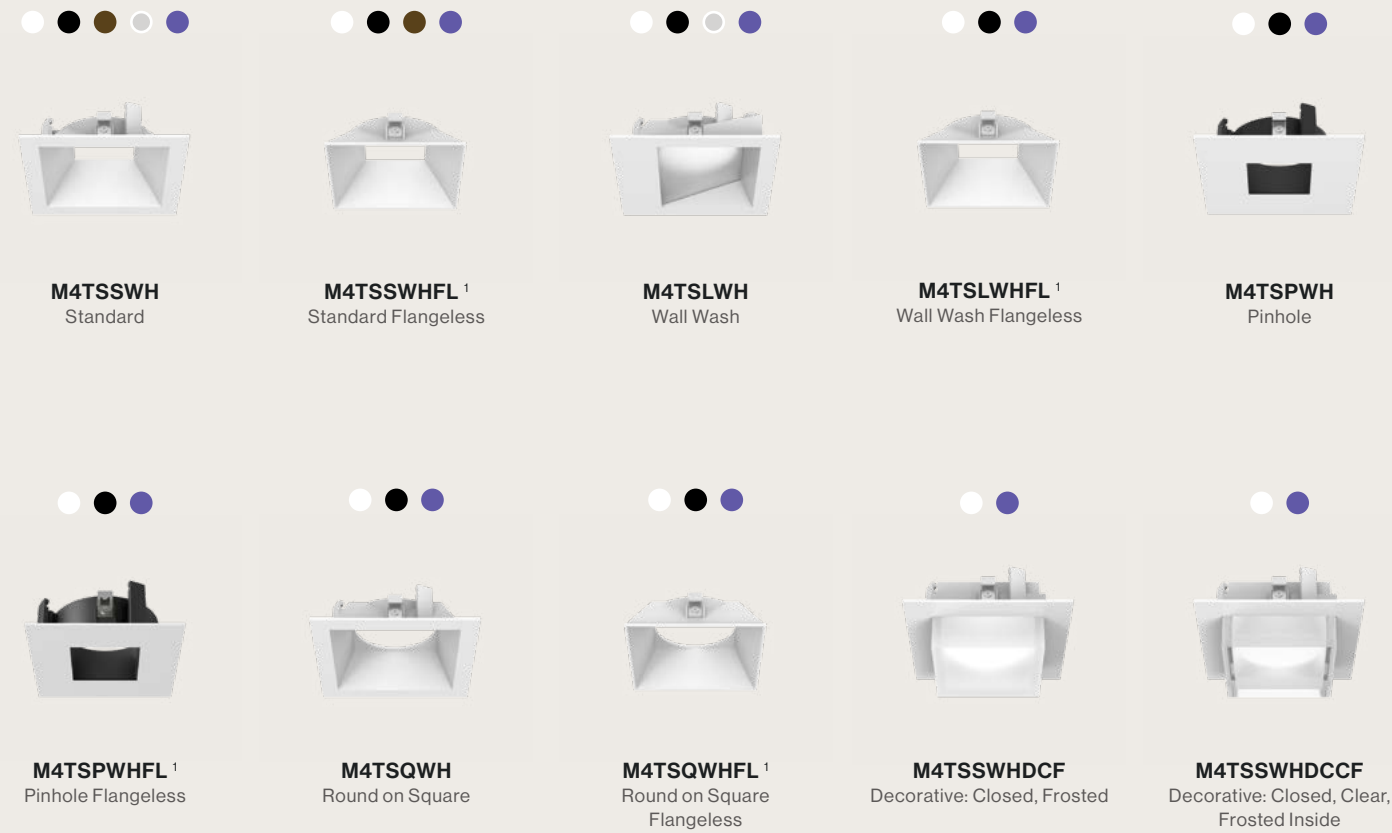

## Housings

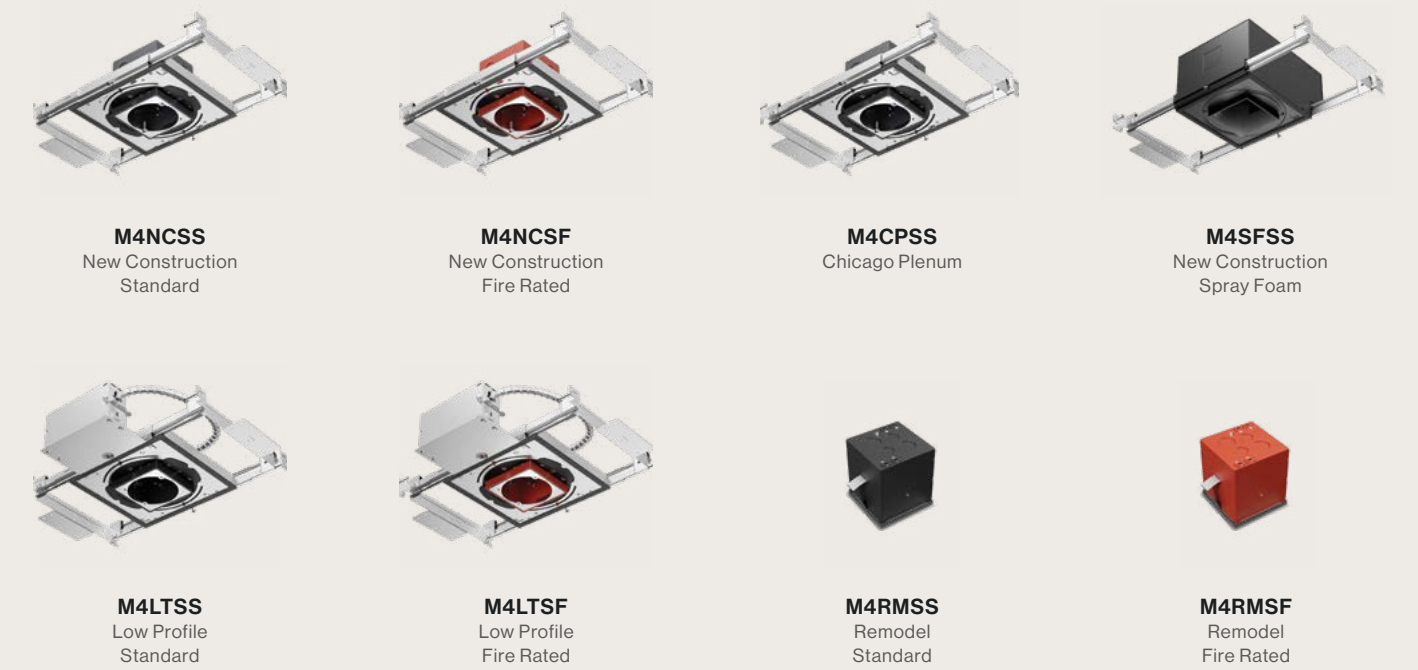

## Accessories





# Artafex 4 Adjustable



## Installation

**Aperture**  
4"

**Ceiling Thickness**  
New Construction: 1/2" up to 1 3/4"  
Remodel: 5/8" up to 1 1/4"  
Retrofit

**Ceiling Material**  
Drywall, Millwork

## Trims

**Shape**  
Round, Square

**Style**  
Standard, Flangeless, Wall Wash, Pinhole,  
Hyperbolic, Decorative

**Finish**  
White, Black, Bronze, Clear Diffuse,  
Custom Color

## Light Output & Distribution

**Module**  
Adjustable: 360° directional aim, 45° tilt

**Lumens (Power)**  
750 lm (9.5W), 1000 lm (12.5W)

**Color Quality**  
True Spectrum®

## Power & Controls

**Input Voltage**  
120/277V

**Dimming**  
PhaseX (0.1%), DALI-2 (0.1%)  
TRIAC/ELV (1%) *120V only*

## Color Temperature

- 2700K    ● 3000K
- 3500K    ● 4000K
- Warm Dim (3000K-1800K)
- Tunable White (4000K-1800K)

## Beam Spread

- ▲ Narrow Spot (15°)
- ▲ Spot (25°)
- ▲ Flood (40°)
- ▲ Linear Spread (60°x30°)
- △ Soft Focus



Declare.




UL Listed for Damp Location




# Artafex 4 Adjustable *Round*

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS


## Trims

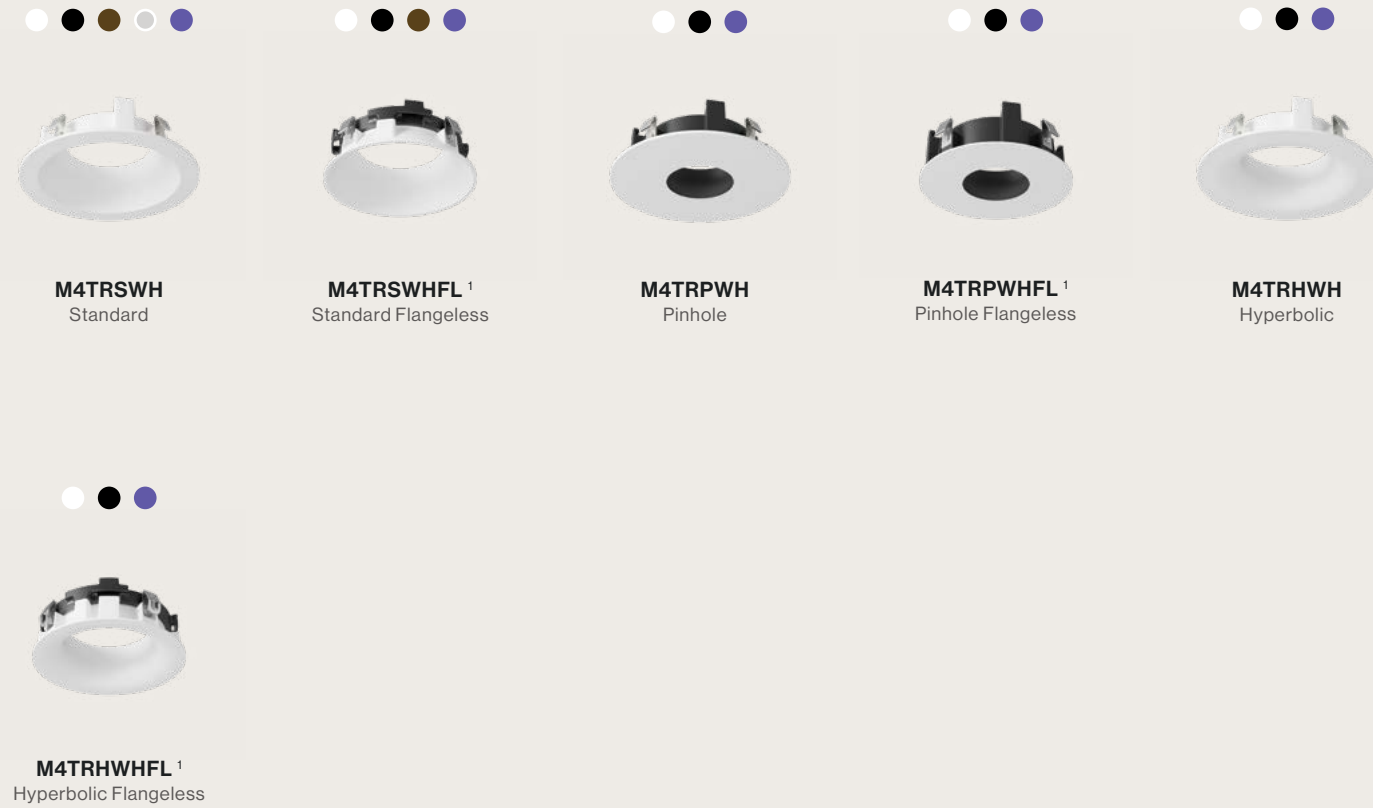

## Housings

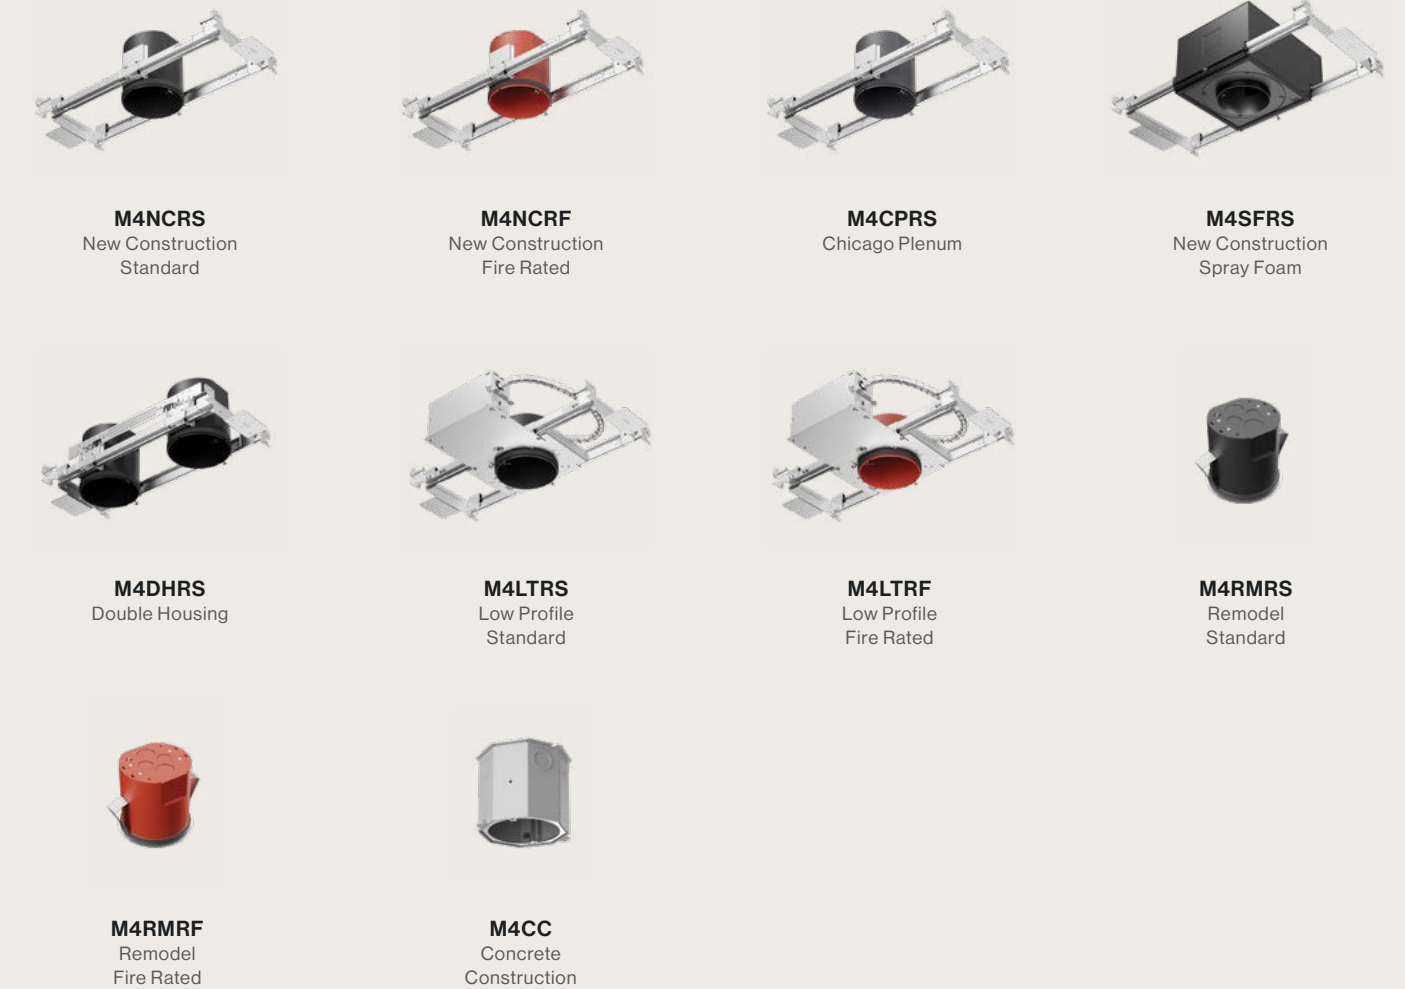


## Accessories

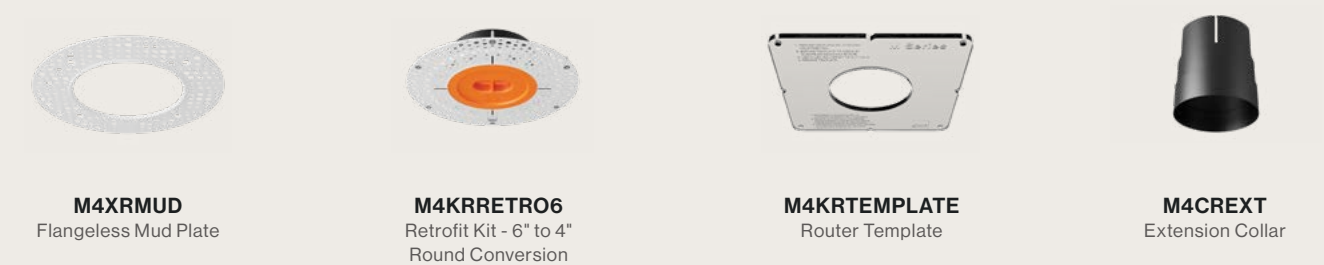


# Artafex 4 Adjustable *Square*

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS


## Trims

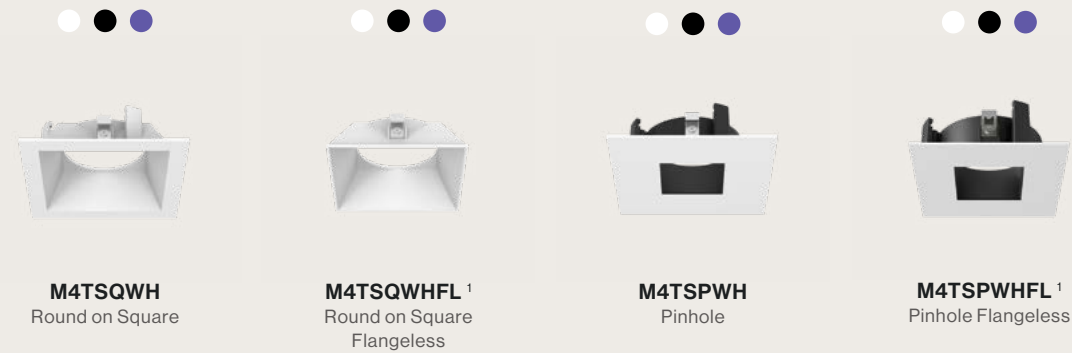

## Housings

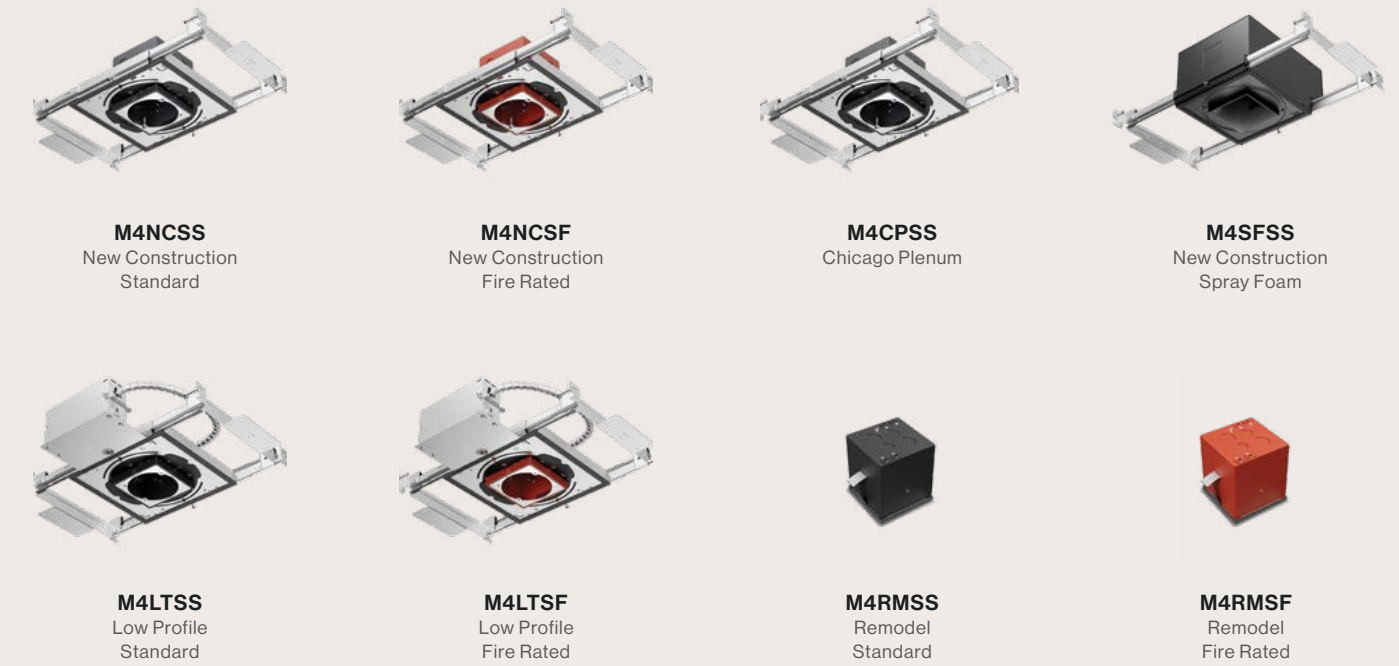

## Accessories

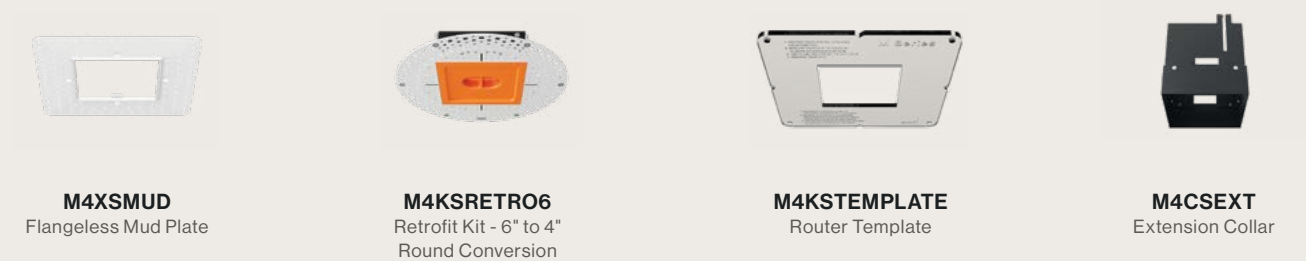

# Classic Retrofit Trims


## Trims




**DRD2TR4SWH**  
4" Smooth




**DRD2TR4BWH**  
4" Baffle

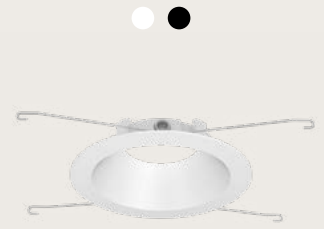


**DRD2TR5SWH**  
5" Smooth

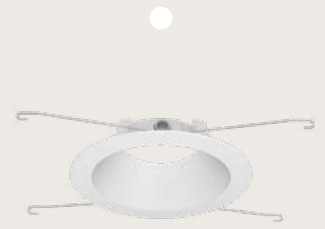

**DRD2TR5BWH**  
5" Baffle

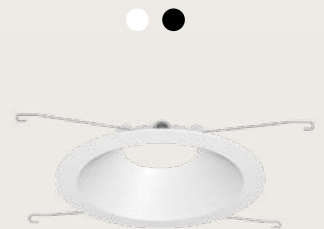

**DRD2TR6SWH**  
6" Smooth

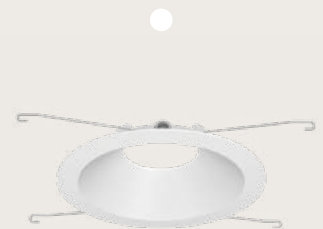

**DRD2TR6BWH**  
6" Baffle


# Surface Mount Housing

## Trims



**DRD2TRJSWH**  
Surface Mount

## Housings



**F4NC**  
New Construction  
Fire Rated

## Accessories



**DRD2X-QCM-ED**  
Edison Adapter



**DRD2X-QCM-M**  
Male IDEAL PowerPlug®  
Adapter



**DRD2X-QCM-GU**  
GU-24 Adapter




**DRD2X-QCM-HW**  
Hardwire Adapter



## Highlight multiple focal points

These rectangular multiple options are based around our **Artafex 4** adjustable modules and maintain clean lines in the ceiling while providing maximum light output. Multi-directional adjustments with 360° directional aim and 45° tilt precisely highlights focal points throughout the interior. Featuring architectural trims that allow for up to 3 openings in one seamless piece.

## Multiples Multi-Head Adjustable

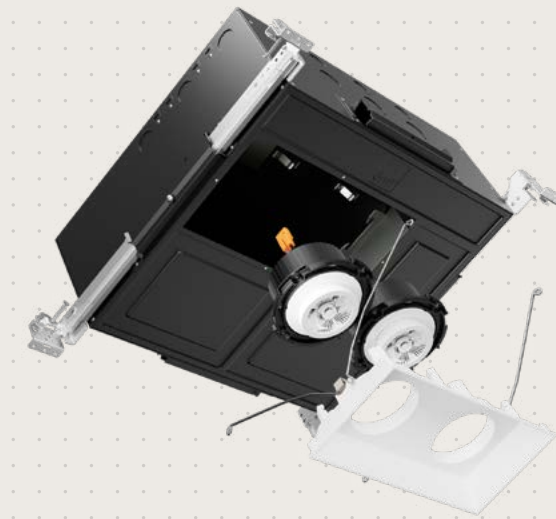

### Installation

**Aperture**  
4"

**Ceiling Thickness**  
New Construction: 1/2" up to 1 3/4"

**Ceiling Material**  
Drywall, Millwork

### Light Output & Distribution

**Module**  
Adjustable: 360° directional aim, 45° tilt

**Lumens (Power)**  
Per Head: 750 lm (9.5W), 1000 lm (12.5W),

**Color Quality**  
True Spectrum®

### Color Temperature

- 2700K ● 3000K
- 3500K ● 4000K
- Warm Dim (3000K-1800K)
- Tunable White (4000K-1800K)

### Trims

**Shape**  
Square, Rectangular

**Style**  
Standard, Flangeless

**Finish**  
White, Black

### Power & Controls

**Input Voltage**  
120/277V

**Dimming**  
PhaseX (0.1%), DALI-2 (0.1%)  
TRIAC/ELV (1%) 120V only

### Beam Spread

- ▲ Narrow Spot (15°) ▲ Spot (25°)
- ▲ Flood (40°) ▲ Linear Spread (40°x20°)
- ▲ Soft Focus



# Multiples Multi-Head Adjustable

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS

## Trims



## Housings



## Accessories



## Surface Mount




## Surface meets *substance*

The **DRD5S Surface Mount** delivers clean, uniform illumination that redefines the potential of surface-mount lighting. This compact surface-mount solution brings the sophistication of high-end recessed downlight systems to utility spaces and ceilings with limited plenum space.



# Surface Mount 4" Round & Square

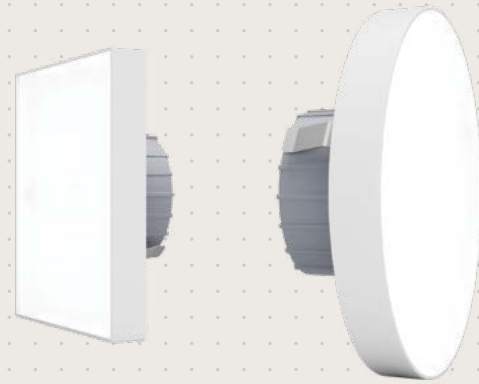

## Installation

**Application**  
New Construction, Retrofit

**Ceiling Material**  
Drywall, Millwork

**Mount**  
Surface Mount

## Finish

**Shape**  
4" Round, 4" Square

**Finish**  
White

## Light Output & Distribution

**Lumens (Power)**  
750lm (9.0W), 1000 lm (12.0W)

**Color Quality**  
90+ CRI, < 3-step SDCM

## Power & Controls

**Input Voltage**  
120/277V for 0-10V only

**Dimming**  
0-10V (1%)  
TRIAC/ELV (5%) *120V only*

## Color Temperature

2700K 3000K  
3500K

## Beam Spread

General  
(90°+)

# Surface Mount 8" Round



## Installation

**Application**  
New Construction, Retrofit

**Ceiling Material**  
Drywall, Millwork

**Mount**  
Surface Mount

## Finish

**Shape**  
8" Round

**Finish**  
White

## Light Output & Distribution

**Lumens (Power)**  
1500 lm (17W)

**Color Quality**  
90+ CRI, < 3-step SDCM

## Power & Controls

**Input Voltage**  
120/277V

**Dimming**  
0-10V (1%)  
TRIAC/ELV (5%)

## Color Temperature

2700K 3000K  
3500K

## Beam Spread

General  
(90°+)

# Surface Mount 18" Linear



## Installation

**Application**  
New Construction, Retrofit

**Ceiling Material**  
Drywall, Millwork

**Mount**  
Surface Mount

## Finish

**Shape**  
18" x 4" Rectangle

**Finish**  
White

## Light Output & Distribution

**Lumens (Power)**  
1500 lm (17W)

**Color Quality**  
90+ CRI, < 3-step SDCM

## Power & Controls

**Input Voltage**  
120/277V

**Dimming**  
0-10V (1%)  
TRIAC/ELV (5%)

## Color Temperature


2700K 3000K  
3500K

## Beam Spread

General  
(90°+)

# Surface Mount Installation

## Housings

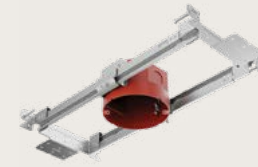

**F4NC**  
New Construction  
Fire Rated

## Compatible Junction Boxes

JUNCTION BOX	MIN. DEPTH	MIN. VOLUME	THROUGH-WIRE RATING
4O Octagonal (metallic)	2 1/8 in	21.5 in <sup>3</sup>	6 (three in, three out) #12 AWG
3O Round (non-metallic)	2 3/4 in	18 in <sup>3</sup>	6 (three in, three out) #12 AWG
4O Round (non-metallic)	2 3/16 in	20 in <sup>3</sup>	6 (three in, three out) #12 AWG



## Artafex 2

Downlight

## Artafex 2

Adjustable

## Artafex 4

Downlight

## Artafex 4

Adjustable

## Surface Mount

### *application*

New Construction, Remodel, Retrofit

New Construction, Remodel, Retrofit

New Construction, Remodel, Retrofit

New Construction, Remodel, Retrofit

New Construction, Retrofit

### *housing*

Artafex Flangeless; X Series

Artafex Flangeless; X Series

M Series; Surface Mount; 4", 5", 6" Retrofit

M Series; Multiples

Surface Mount; Metallic Octagonal; or Non-Metallic Round Junction Box

### *adjustment*

–

360° directional aim, 35° tilt

–

360° directional aim, 45° tilt

–

### *lumens*

750 lm (9.5W), 1000 lm (12.5W),  
1250 lm (14.3W)

750 lm (12.5W), 1000 lm (14.3W)

750 lm (9.5W), 1000 lm (12.5W),  
1250 lm (14.3W), 1500 lm (16.5W)

750 lm (9.5W), 1000 lm (12.5W)

4": 750 lm (9.0W), 1000 lm (12.0W)  
8"/18": 1500 lm (17.0W)

### *color quality*

True Spectrum®

True Spectrum®

True Spectrum®

True Spectrum®

90+ CRI, < 3-step SDCM

### *color temperature*

2700K, 3000K, 3500K, 4000K,  
Warm Dim (3000-1800K),  
Tunable White (4000-1800K)

2700K, 3000K, 3500K, 4000K,  
Warm Dim (3000-1800K),  
Tunable White (4000-1800K)

2700K, 3000K, 3500K, 4000K,  
Warm Dim (3000-1800K),  
Tunable White (4000-1800K)

2700K, 3000K, 3500K, 4000K,  
Warm Dim (3000-1800K),  
Tunable White (4000-1800K)

2700K, 3000K, 3500K

### *dimming*

PhaseX (0.1%), DALI-2 (0.1%)  
TRIAC/ELV (1%) 120V only

PhaseX (0.1%), DALI-2 (0.1%)  
TRIAC/ELV (1%) 120V only

PhaseX (0.1%), DALI-2 (0.1%)  
TRIAC/ELV (1%) 120V only

PhaseX (0.1%), DALI-2 (0.1%)  
TRIAC/ELV (1%) 120V only

0-10V (1%), TRIAC/ELV (5%),

### *beam spread*

Ultra Narrow Spot (10°), Narrow Spot (20°),  
Spot (30°), Flood (40°), Wide Flood (50°),  
Linear Spread (50°x30°)

Narrow Spot (20°), Spot (30°), Flood (40°),  
Wide Flood (50°), Linear Spread (50°x30°)

Narrow Spot (15°), Spot (25°), Flood (40°),  
Wide Flood (60°), General (90°+),  
Linear Spread (40°x20°), Soft Focus

Narrow Spot (15°), Spot (25°), Flood (40°),  
Linear Spread (60°x30°), Soft Focus

General (90°+)

### *options*

-

-

-

Black, White Surround

4" Round, 4" Square,  
8" Round, 18" Linear

### *input voltage*

120/277V

120/277V

120/277V

120/277V

4": 120V; 8"/18": 120/277V

### *standards*

JA8 Title 24, UL Certified US-CA,  
ENERGY STAR®, Declare

JA8 Title 24, UL Certified US-CA,  
ENERGY STAR®, Declare

JA8 Title 24, UL Certified US-CA,  
ENERGY STAR®, Declare

JA8 Title 24, UL Certified US-CA,  
ENERGY STAR®, Declare

JA8 Title 24, UL Certified US-CA,  
ENERGY STAR®, Declare

### *ratings*

Wet Location

Damp Location

Wet Location

Damp Location

Wet Location

### *dmf promise*

Yes

Yes

Yes

Yes

–

# **dmf**

DMF Lighting  
1118 East 223rd Street  
Carson, CA 90745

323.934.7779  
info@dmfLuxury.com

**dmfLuxury.com**