



luxury

Product Guide

2025 | V 1.0

dmf

Table of *contents*

4

Brilliance
Engineered

6

Our Promise

8

Artafex

12

Introducing
PhaseX

16

Introducing
Linear

22

Artafex 2

36

Artafex 4

54

Multiples

58

Surface
Mount

64

Comparison
Chart





Brilliance *engineered*

DMF Lighting designs and builds modular downlighting solutions that lead the industry in quality, flexibility, and superior performance. For nearly 40 years, our dedicated engineers in Carson, California, have developed a range of products that reimagine the possibilities of premium lighting and its impact on the look and feel of your home.

We are committed to rigorous research and development, which has driven numerous innovations in illumination. This commitment to continuous improvement keeps DMF Lighting at the forefront of innovation in premium lighting solutions.

Our exclusive line of luxury lighting products, Artafex, is designed and engineered to elevate the beauty and comfort of your home. Whether highlighting artwork, accentuating architectural details, or precisely rendering the colors and textures of a room, Artafex ensures your home looks—and feels—the way it should.

*The art of engineering
is at the heart of our company.*

Unmatched *quality and support*

DMF Lighting is proud to provide outstanding products and solutions to custom integrators. We believe these products provide the best solution for your lighting projects and are so confident that we are pledging **The DMF Promise** – Guaranteed Reliability, Guaranteed Compatibility, and Guaranteed Support. This promise is a natural extension of our commitment to you.



Guaranteed Reliability

We proudly offer outstanding products and solutions, backed by an industry-best warranty of 10 years on all of our downlight modules.

Guaranteed Compatibility

We guarantee seamless compatibility with all major local and centralized lighting control systems specified by our customers.

Guaranteed Support

In addition to our general customer support, you can directly connect with a DMF engineer at our Los Angeles office for technical questions.







Artafex

Artful lighting for *everyday luxury*

Artafex, an exclusive line of award-winning lighting products, is designed to meet the demands of modern custom integrators and elevate their projects to a new level of elegance and style. Showcasing a seamless blend of form and function, Artafex sets a new standard for luxury and versatility and is available exclusively for custom integrators who demand the finest in lighting innovation.

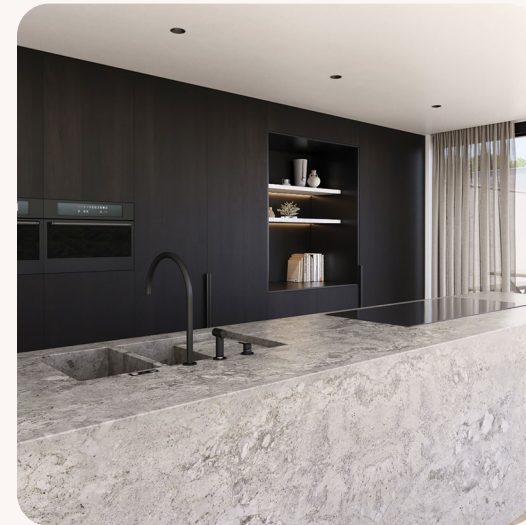

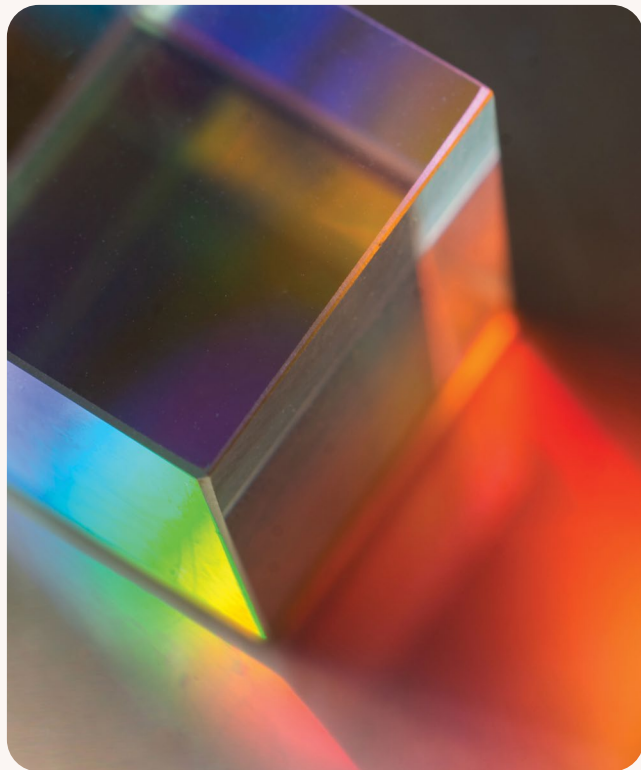

True Spectrum®

Exceptional ability *to display colors*

The culmination of studying 99 variations of color to create light engines that are exceptional in their ability to effectively display colors as they appear under natural light. Artafex modules feature **True Spectrum®** high CRI LED technology.



Committed *to innovation*

Artafex continues to evolve – with the expansion of **Artafex Linear** and **PhaseX Digital**, staying true to its commitment to artistry and precision. These innovations provide custom integrators with seamless integration and advanced control, elevating every project with cutting-edge technology, sophisticated design, and dynamic features.

Artafex

2024

CEDIA Smart Home Awards
Best New Hardware Product, Global
Winner

2024

Technology Designer
Performance Home Awards
Best Product

2024

Residential Systems
CEDIA Best of Show
Winner

2024

ResTech
Innovation Award
Finalist

Award-winning
performance




PhaseX



A giant leap *in tunable white*

PhaseX brings digital lighting to DMF's Artafex recessed lighting families using standard electrical wiring, offering tunable white lighting, 0.1% dimming, and flexible zoning. The compact **PhaseX Gateway** ensures fast communication and precise control, enhancing the lighting experience with modern, dynamic features.

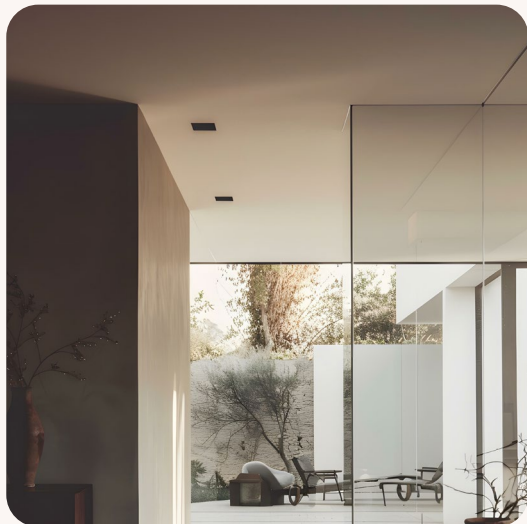



Digital illumination simplified

PhaseX combines the simplicity of a wireless solution, the reliability of wired systems, and the flexibility of open protocols to deliver unparalleled performance and adaptability.

Adapts to your *daily rhythms*

Soft zoning that allows you to fine-tune lighting scenes and groupings without rewiring, and precise 0.1% dimming for ultimate ambiance control.

Robust, scalable *solution*

Available for **Artafex 2** and **Artafex 4**, delivering premium lighting at a reasonable cost and empowering you to bring more digital projects to life.

PhaseX



ART-GWX

Summary

- Designed for use with Artafex PhaseX enabled fixtures.
- Provides full control of up to 64 PhaseX lighting fixtures via standard electrical wiring.
- Interfaces with lighting control systems using the industry-standard DMX/RDM protocol.
- Unlocks the benefits of digital control and tunable white lighting.

Electrical

- AC Input** Screw terminals for AC Line and Neutral. Max. 12 AWG Wire.
- AC Output** Screw Terminals for AC Line Out & Neutral Out. Max. 12 AWG wire.
- DMX Input** (2) 3-Position Pluggable Terminal Block. (DMX+, DMX-, G)

Features

- Ultra reliable, 2-way communication
- DIN Rail mountable into standard electrical enclosures
- Direct Integration to Crestron Home via DMX-C (Requires DIN-GWDL Gateway from Crestron)

USB Micro-USB Connection for use with PhaseX Commissioning Utility

Contact Closure (2) Contact Closure Inputs (CCI1, CCI2, G) (Reserved for future use)

Power & Controls


- Input Voltage 120VAC, 60Hz
- Output Current Max. 8A

Compliance

UL508, UL8750

Artafex

Linear

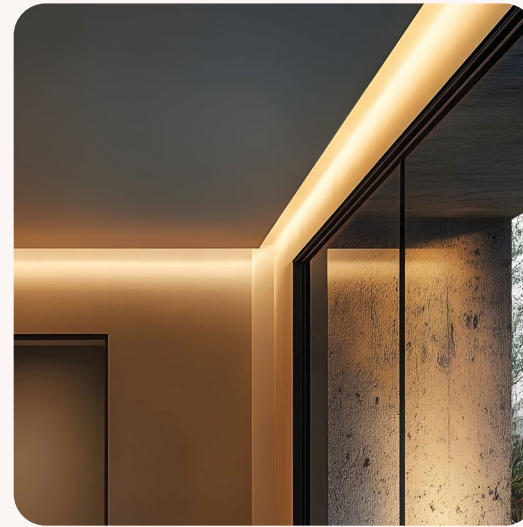

A new approach *to linear lighting*

Our newest home illumination solution for custom integrators, designed to provide a premium-performance, easy-to-install alternative to traditional linear. Designed for custom integrators, it brings DMF's hallmark modularity and flexibility to linear lighting. Seamlessly integrating into architectural features, it suits ambient, accent, and task lighting applications. Magnetic connectors ensure quick, solder-free installation.


Convenience *factor*

The **Linear Kit** includes a selection of accessories curated to allow you to achieve the vast majority of applications without ordering separate accessory kits.



Curated color *and dimming*


192 high-efficacy LEDs per foot deliver perfect blending and color that integrates seamlessly with our downlight products.

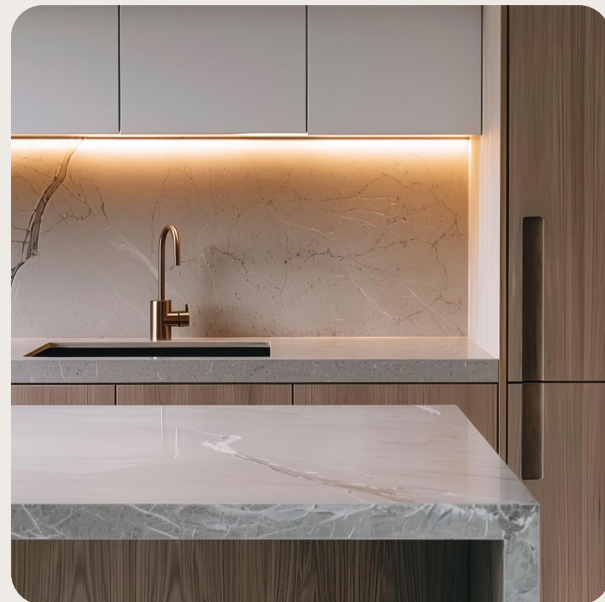

Easy installation *and serviceability*

Simple magnetic connections with no soldering required. A modular design allows you to service just one component, not the entire run.

Artafex Linear

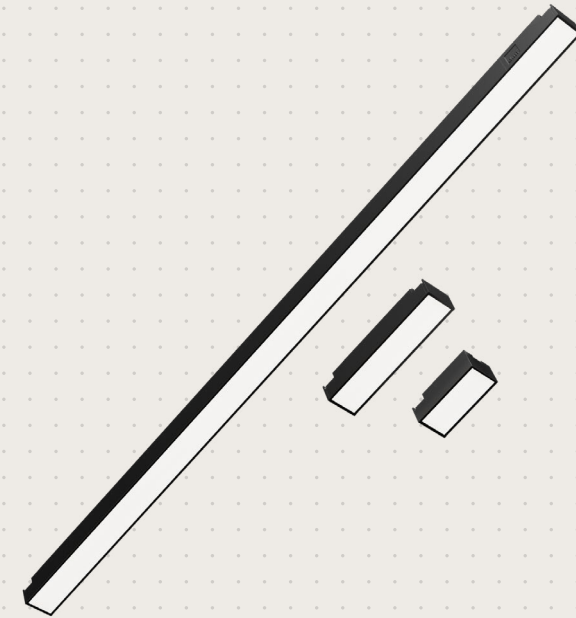

Installation

Mounting
Surface Mount:
Flat Field-Cutttable Mounting Track
45° Field-Cutttable Mounting Track
Mounting Tracks may be recessed in Millwork

Run Length
Min. 3' per Driver
Max. 20' per Driver

Physical

Dimensions
1/2" x 1/2" Profile

Finish
Black Anodized

Light Output & Distribution

Lumens (Power)
360lm/ft (4W)

Color Quality
95 CRI

Power & Controls

Input Voltage
Fixture: 48VDC
Driver: 100-277VAC

Dimming
TRIAC/ELV (0.5%) 120V *only*

Home Run Length
Max. 200' with 16/2 Wire
Max. 75' with 18/2 Wire

Color Temperature

Default:
Warm Dim (3000K-1800K)

User Selectable:
2000K 2700K 3000K

Beam Spread



Artafex Linear

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS

Kit



Includes: 12" Fixture Segment with Middle Connector (10), 2" Fixture Segment (4), 1" Fixture Segment (1), Input Connector (2), Middle Connector (3), Dead End Cover (1), 24" Jumper (1), 6" Jumper (1)

ART05L-1203WD10
Linear Kit (10ft)

Driver




ARTP-4896T1
Linear Single Output Driver

Fixtures



ART05L-1203WD01
Linear 12" Fixture Segment with Middle Connector



ART05L-0103WD10
Linear 2" Fixture Segment (10-Pack)



ART05L-0203WD10
Linear 1" Fixture Segment (10-Pack)

Mounting Tracks



Includes: 48" Flat Mounting Track (3), No.4½" Phillips Flat Head Wood Screws (30), Track Alignment Tool (1)

ART05L-FL03
Linear Flat Mounting Track Kit (12ft)



ART05L-4503
Linear 45° Mounting Track Kit (12ft)

Includes: 48" 45° Mounting Track (3), No.4½" Phillips Flat Head Wood Screws (30), Track Alignment Tool (1)

Accessories




ART05L-PF10
Linear Input Connector (10-Pack)



ART05L-JN10
Linear Middle Connector (10-Pack)



ART05L-J0605
Linear 6" Jumper (5-Pack)



ART05L-J2405
Linear 24" Jumper (5-Pack)




ART05L-DE10
Linear Dead End Cover (10-Pack)

Artafex 2


Gracefully *stylish*

Our award-winning small-aperture lighting solution is designed and engineered to keep ceilings quiet and uncluttered.

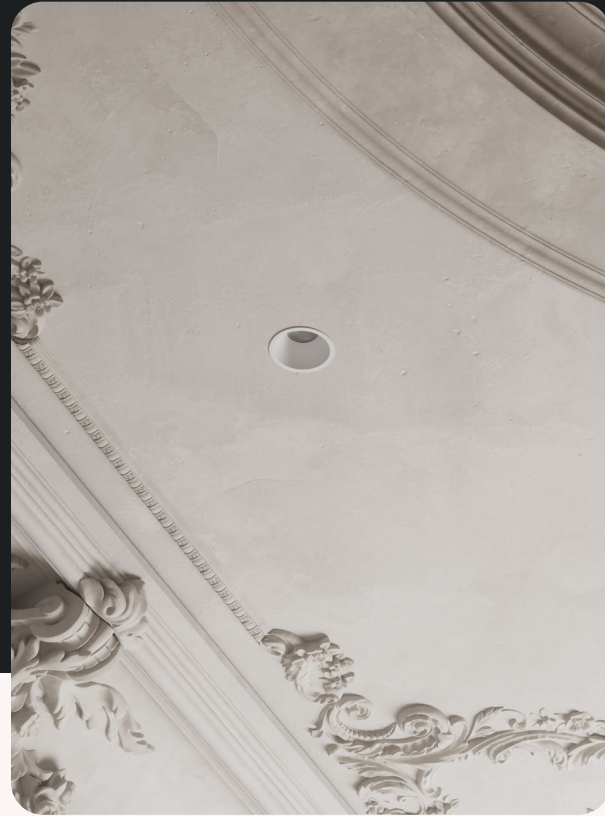

Universal *housing*

Artafex 2 versatile X Series housings accommodate both fixed and adjustable modules. Its innovative pull-down latch simplifies serviceability, providing easy access to the splice and driver from below the ceiling. The latest addition to Artafex 2, a dedicated **Flangeless Housing**, can be installed using conventional drywall taping techniques to achieve a Level 5 finish.

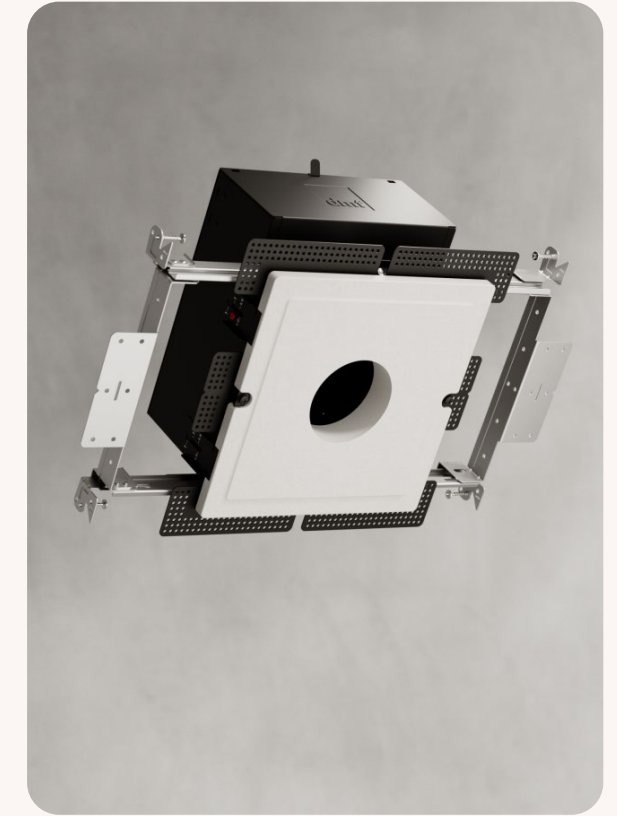

Small aperture *modules*

The revolutionary Artafex 2 combines **True Spectrum®** technology and the performance of larger fixtures with the design of small aperture fixtures for a quiet ceiling. They deliver up to 1250 lm and are completely interchangeable. Swap lumens, color temperature, or optics all from below the ceiling.



The key to *innovation*

A true innovation, our **Precision Lock Collars** eliminates over-cutting and ensures a flawless cutout, and error-free installation at a uniform depth.



Designed *to disappear*

Artafex 2 small aperture trim options are designed to complement or disappear into any space, creating quiet ceilings throughout the home. They are meticulously engineered to provide unmatched precision and exceptionally easy installation with DMF's convenient **Twist & Lock** system.

Upgraded *illumination*

Upgrading your lamp source with a **Retrofit Solution** retains the existing above ceiling fixture and lighting layout while offering you improved color representation, advanced optics, 1% dimming, warm dim options, and compatibility with home automation systems.




FLANGELESS



MICRO FLANGE



DECORATIVE



- WHITE
- BLACK
- BRONZE
- CUSTOM





Artafex 2 Downlight



Installation

Aperture
2"

Ceiling Thickness
New Construction: 1/2" up to 1 1/4"
Remodel: 1/2" up to 1 1/4"
Retrofit

Ceiling Material
Drywall, Millwork

Trims

Shape
Round, Square

Style
Standard, Micro Flange, Flangeless, Wall Wash, Pinhole, Hyperbolic, Decorative

Finish
White, Black, Bronze, Clear Diffuse, Custom Color

Light Output & Distribution

Module
Downlight

Lumens (Power)
750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W)

Color Quality
True Spectrum®

Power & Controls

Input Voltage
120/277V

Dimming
PhaseX (0.1%), DALI-2 (0.1%)
TRIAC/ELV (1%) *120V only*

Color Temperature

- 2700K ● 3000K
- 3500K ● 4000K
- Warm Dim (3000K-1800K)
- Tunable White (4000K-1800K)

Beam Spread

- ▲ Ultra Narrow Spot (10°) ▲ Narrow Spot (20°)
- ▲ Spot (30°) ▲ Flood (40°)
- ▲ Wide Flood (50°) ▲ Linear Spread (50°x30°)



Declare.



UL Listed for Wet Location


Artafex 2 Downlight *Round*

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS

Trims



Housings

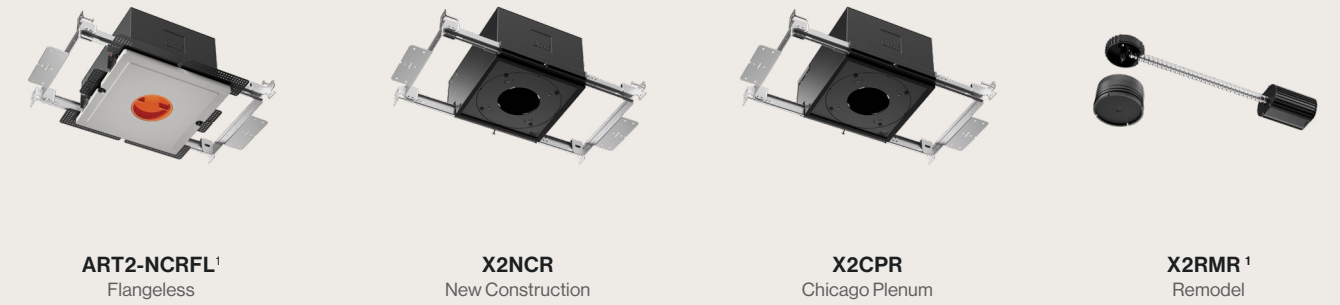

Accessories




Artafex 2 Downlight *Square*

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS


Trims



Housings

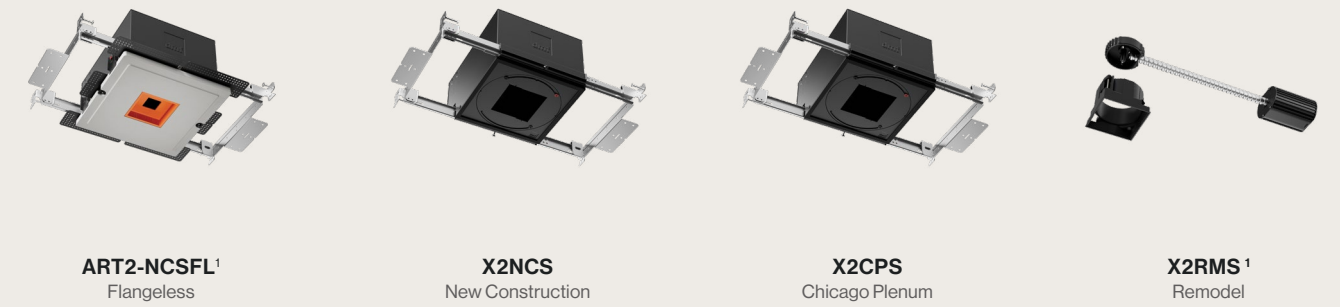

Accessories

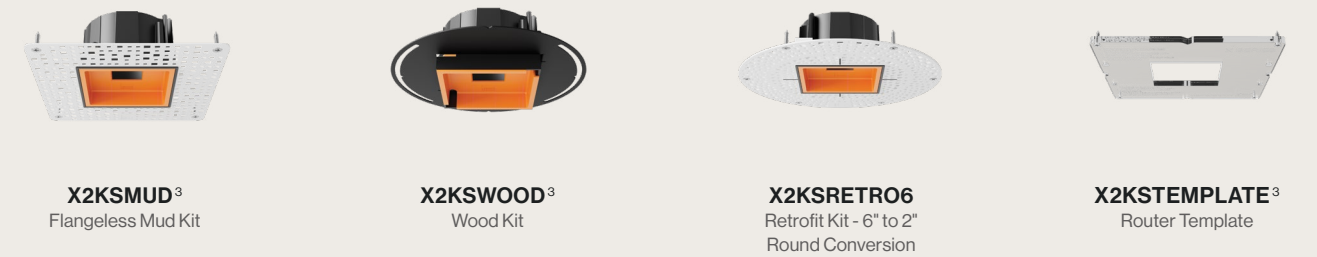



Artafex 2 Adjustable



Installation

Aperture
2"

Ceiling Thickness
New Construction: 1/2" up to 1 1/4"
Remodel: 5/8" up to 1 1/4"
Retrofit

Ceiling Material
Drywall, Millwork

Trims

Shape
Round, Square

Style
Standard, Micro Flange, Flangeless,
Wall Wash, Pinhole

Finish
White, Black, Bronze, Clear Diffuse,
Custom Color

Light Output & Distribution

Module
Adjustable: 360° rotation, 35° tilt

Lumens (Power)
750 lm (12.5W), 1000 lm (14.3W)

Color Quality
True Spectrum®

Specialty Lens
Hexcell Louver

Power & Controls

Input Voltage
120/277V

Dimming
PhaseX (0.1%), DALI-2 (0.1%)
TRIAC/ELV (1%) *120V only*

Color Temperature

- 2700K ● 3000K
- 3500K ● 4000K
- Warm Dim (3000K-1800K)
- Tunable White (4000K-1800K)

Beam Spread

- ▲ Narrow Spot (20°) ▲ Spot (30°)
- ▲ Flood (40°) ▲ Wide Flood (50°)
- ▲ Linear Spread (50°x30°)



Declare.




UL Listed for Damp Location

Artafex 2 Adjustable *Round*

Trims



Housings

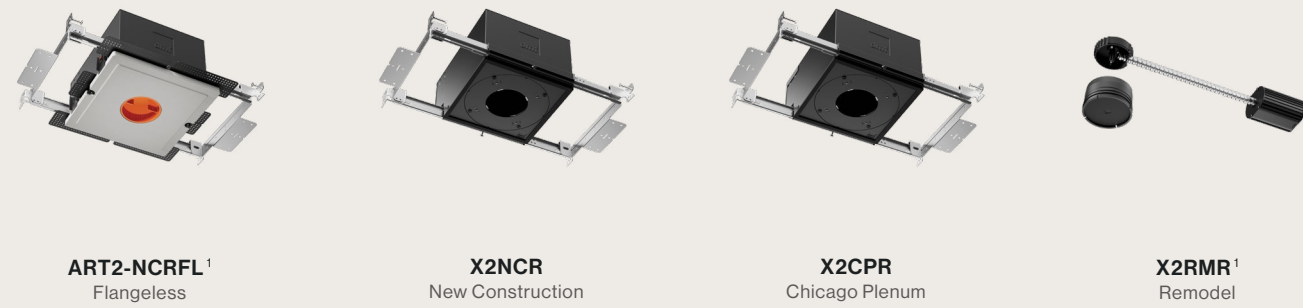


Accessories




Artafex 2 Adjustable *Square*


Trims

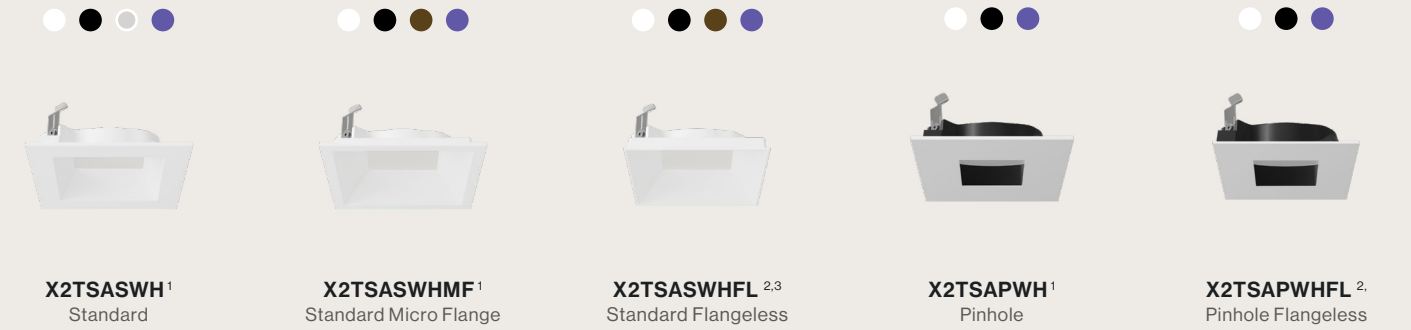

Housings

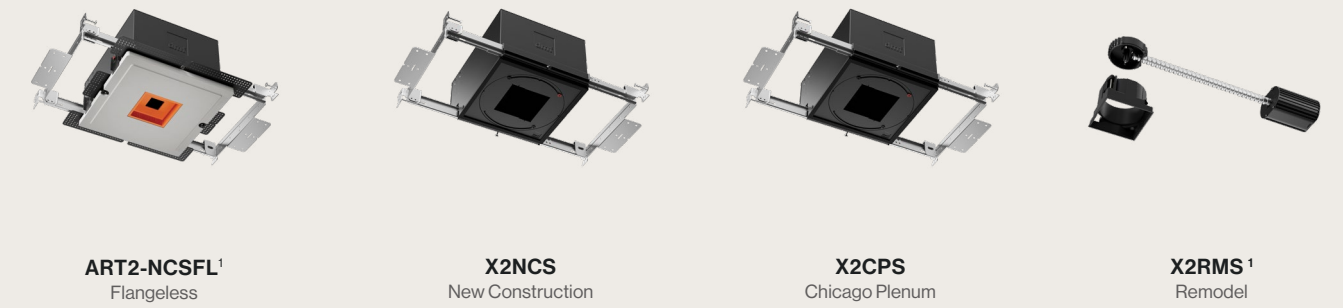

Accessories

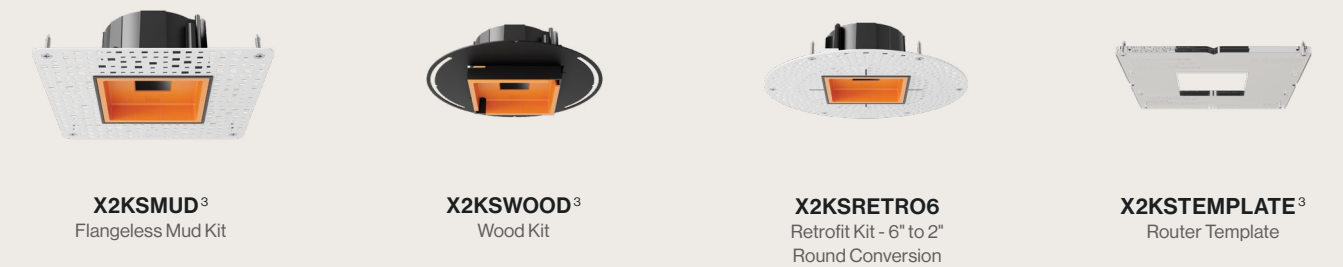

Artafex 4

Exceptional *versatility*

Our most multifaceted recessed lighting system with housings that work in almost all installations and ceiling designs, including concrete and low-profile




Effortless *precision*

The **Artafex 4** modules with **True Spectrum®** technology deliver vibrant, accurate lighting that enhances any space. Designed for ease of use, they feature field-changeable optics, an integrated power system, and full 360° adjustability with 45° tilt for unmatched flexibility.

Artafex 4 simplifies modern lighting design, offering effortless precision and elegance in every application.

Flexible *housings*

Artafex 4 offers over a dozen varieties of M Series housings, ensuring maximum flexibility for any project. This diverse selection allows for seamless integration into a wide range of architectural styles and use-cases. The latest addition, **Spray Foam Housing**, is specifically designed to meet the stringent standards of UL 1598 and current NFPA regulations.

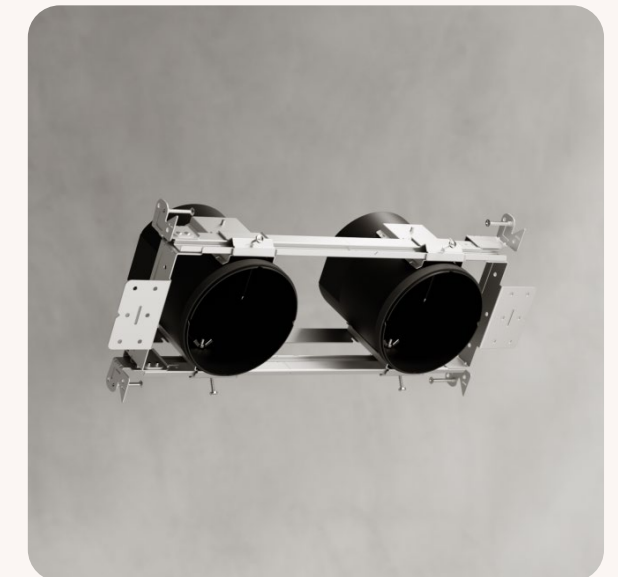




Distinct *craftsmanship*

Our **Artafex 4** trims stand out with exceptional materials and finish, setting a new standard in the category. From wall wash to hyperbolic to pinhole, our trim designs accommodate any aesthetic, and with DMF's convenient **Twist & Lock** system, installation is easy with no tools required.

Effortless *upgrade*

Retrofitting existing fixtures with DMF downlights is the quickest, most economical path to enhancing your space. Transform your existing fixture with new modules and **Retrofit Trims** in 6", 5", 4" apertures. Upgrading your lamp source with a retrofit solution offers you improved color representation, advanced optics, 1% dimming, warm dim options, and compatibility with home automation systems.

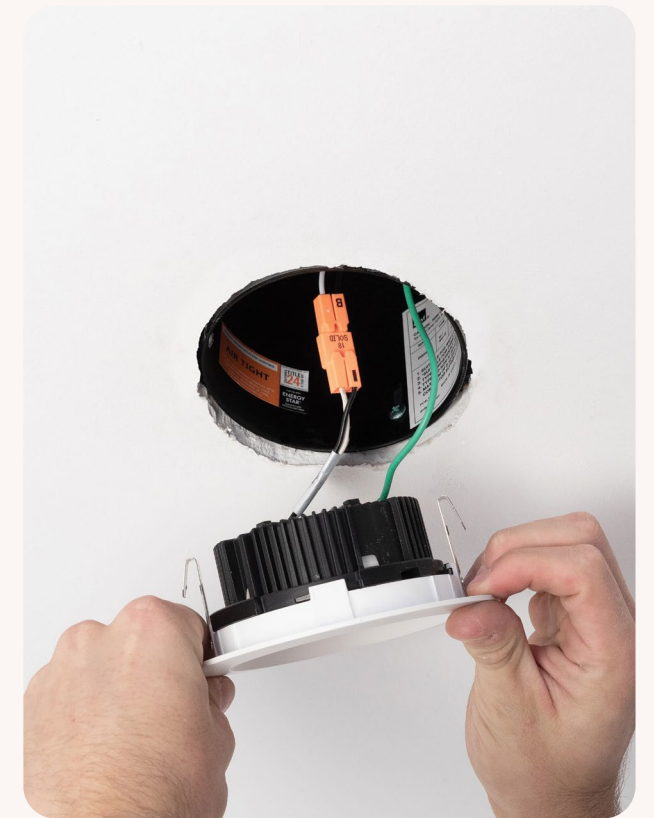


FLANGELESS



FLANGED



DECORATIVE

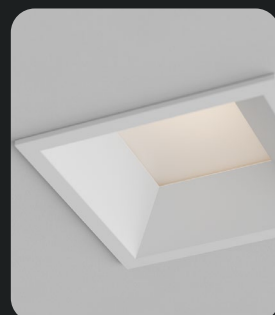

WHITE



BLACK



BRONZE



CLEAR DIFFUSE



CUSTOM



Seamless *transformation*

Artafex **Retrofit Conversion Kits** offer a sophisticated solution for transforming existing 6" fixtures into 4" downlights, with a variety of trim options to choose from.



Artafex 4 Downlight



Installation

Aperture
4"

Ceiling Thickness
New Construction: 1/2" up to 1 3/4"
Remodel: 5/8" up to 1 1/4"
Retrofit

Ceiling Material
Drywall, Millwork

Trims

Shape
Round, Square

Style
Standard, Flangeless, Wall Wash, Pinhole, Hyperbolic, Decorative

Finish
White, Black, Bronze, Clear Diffuse, Custom Color

Light Output & Distribution

Module
Downlight

Lumens (Power)
750 lm (9.5W), 1000 lm (12.5W),
1250 lm (14.3W), 1500 lm (16.5W)

Color Quality
True Spectrum®

Power & Controls


Input Voltage
120/277V

Dimming
PhaseX (0.1%), DALI-2 (0.1%)
TRIAC/ELV (1%) *120V only*

Color Temperature

- 2700K ● 3000K
- 3500K ● 4000K
- Warm Dim (3000K-1800K)
- Tunable White (4000K-1800K)

Beam Spread

-  Narrow Spot (15°)
-  Spot (25°)
-  Flood (40°)
-  Wide Flood (60°)
-  General (90°+)
-  Linear Spread (40°x20°)
-  Soft Focus




UL Listed for Wet Location


Artafex 4 Downlight *Round*

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS


Trims

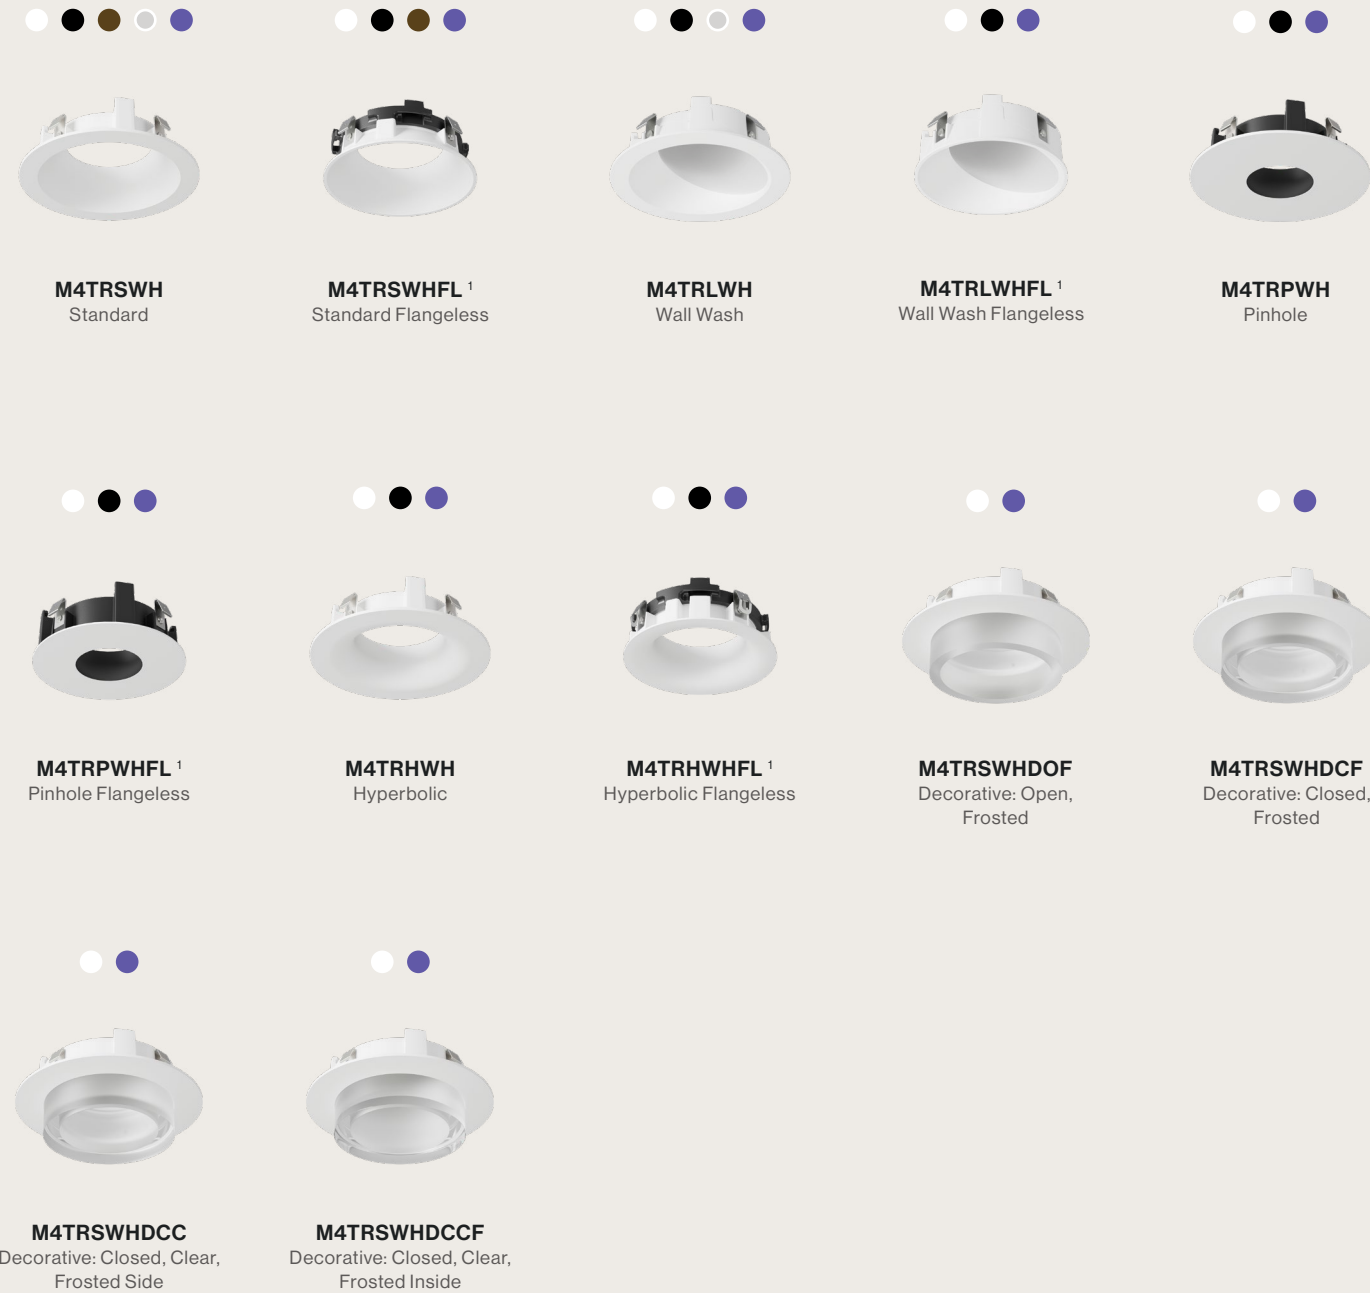

Housings

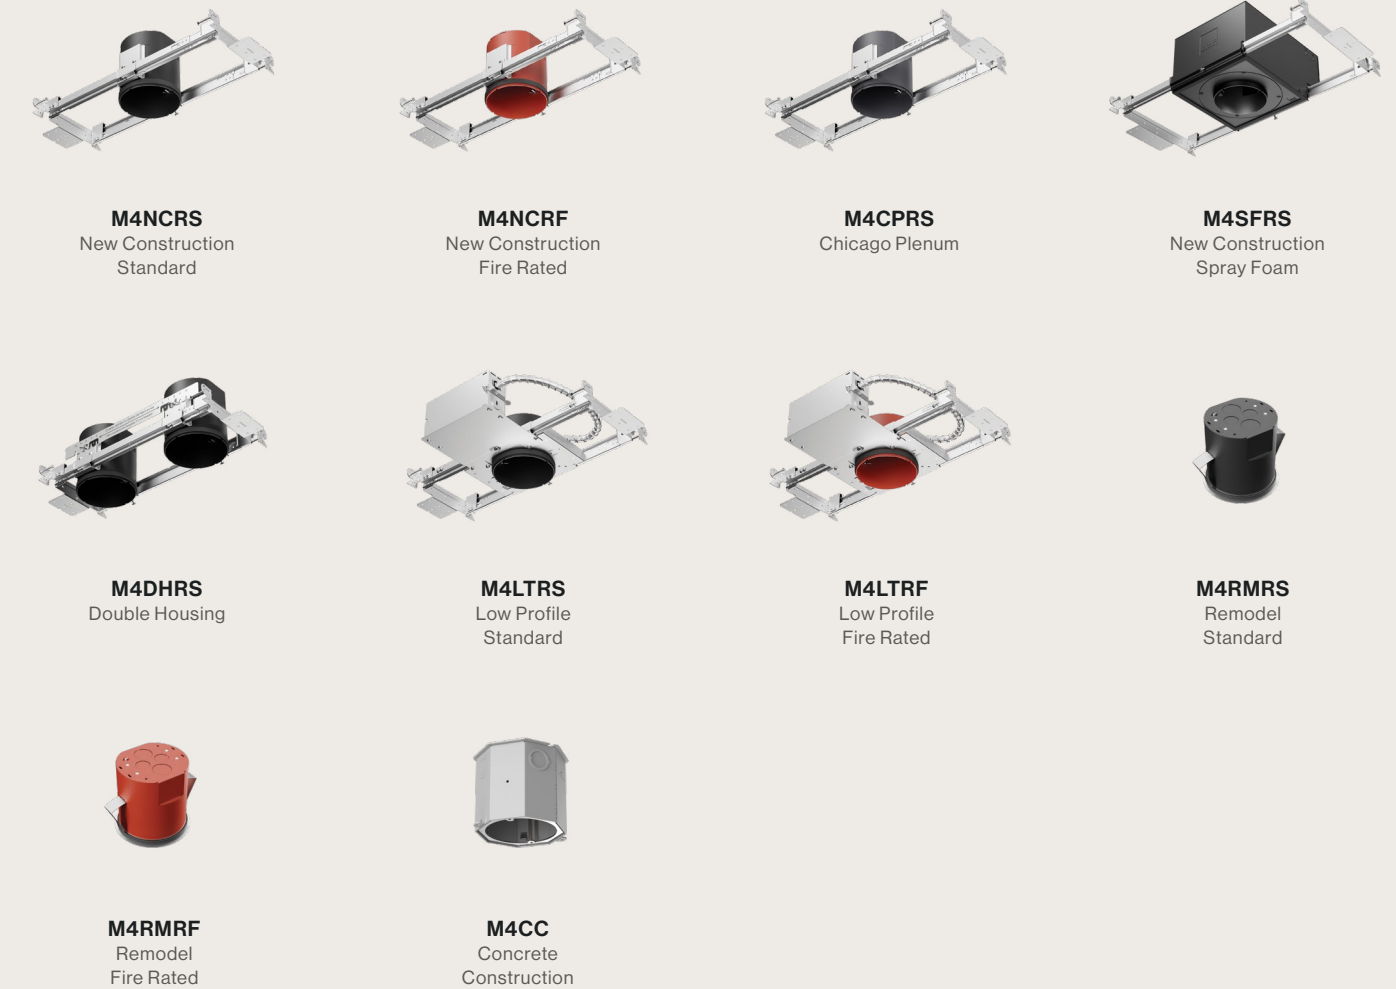


Accessories

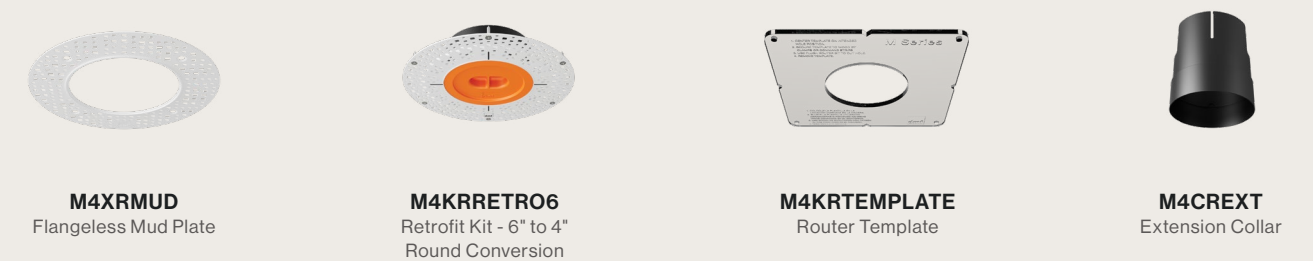


Artafex 4 Downlight *Square*

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS


Trims

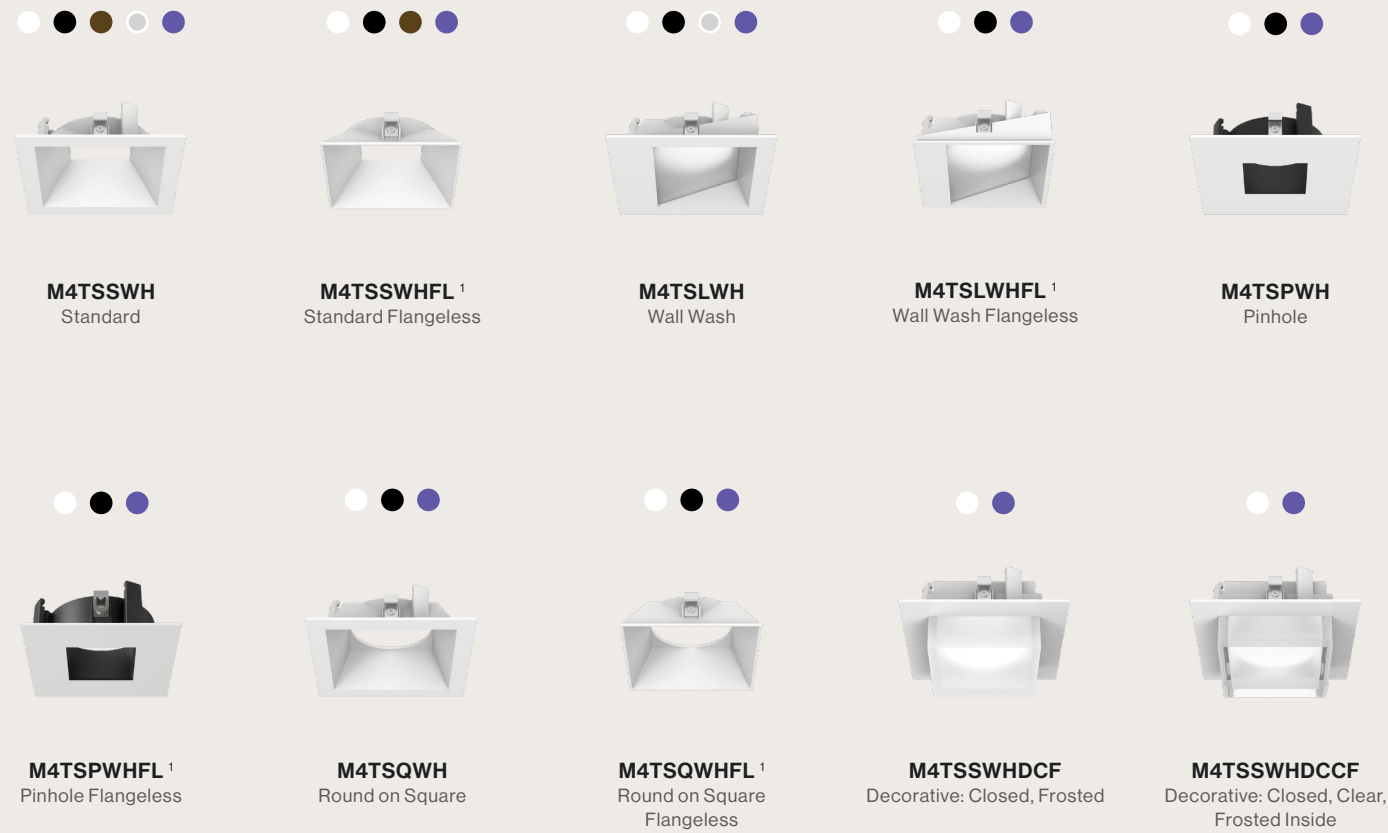

Housings

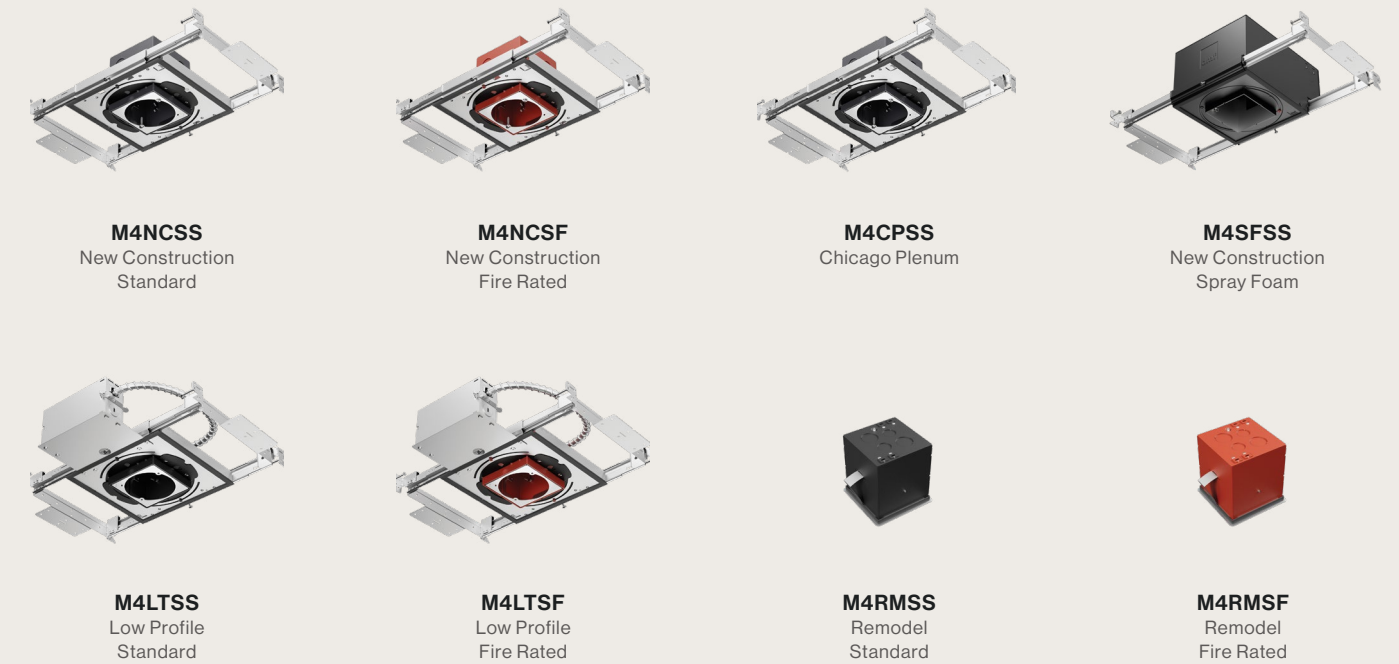

Accessories

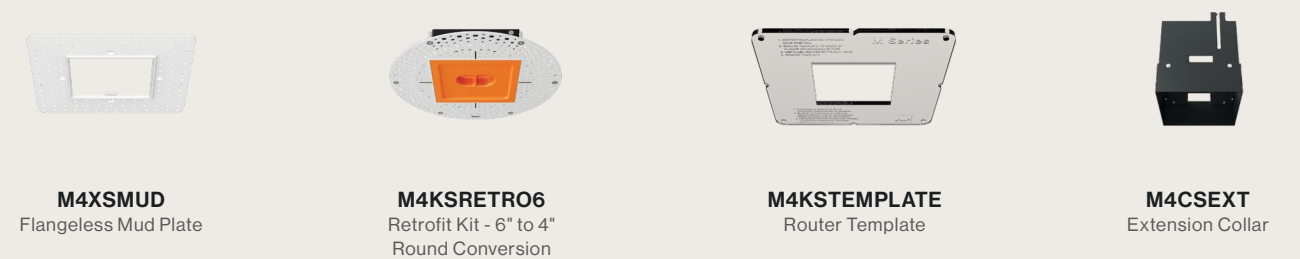



Artafex 4 Adjustable



Installation

Aperture
4"

Ceiling Thickness
New Construction: 1/2" up to 1 3/4"
Remodel: 5/8" up to 1 1/4"
Retrofit

Ceiling Material
Drywall, Millwork

Trims

Shape
Round, Square

Style
Standard, Flangeless, Wall Wash, Pinhole,
Hyperbolic, Decorative

Finish
White, Black, Bronze, Clear Diffuse,
Custom Color

Light Output & Distribution

Module
Adjustable: 360° directional aim, 45° tilt

Lumens (Power)
750 lm (9.5W), 1000 lm (12.5W)

Color Quality
True Spectrum®

Specialty Lens
Hexcell Louver

Power & Controls

Input Voltage
120/277V

Dimming
PhaseX (0.1%), DALI-2 (0.1%)
TRIAC/ELV (1%) *120V only*

Color Temperature

- 2700K ● 3000K
- 3500K ● 4000K
- Warm Dim (3000K-1800K)
- Tunable White (4000K-1800K)

Beam Spread

- ▲ Narrow Spot (15°) ▲ Spot (25°)
- ▲ Flood (40°) ▲ Linear Spread (60°x30°)
- ▲ Soft Focus



Declare.




UL Listed for Damp Location


Artafex 4 Adjustable *Round*

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS


Trims

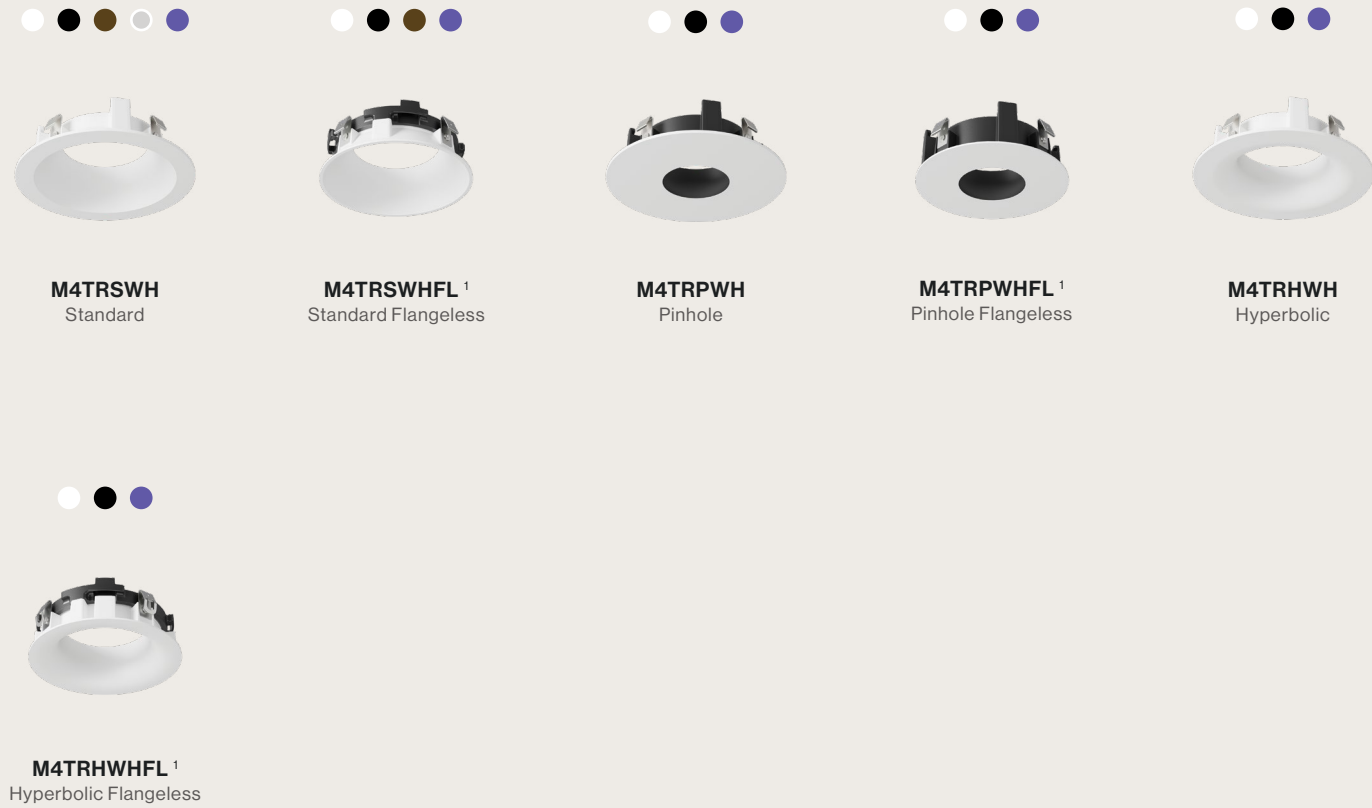

Housings

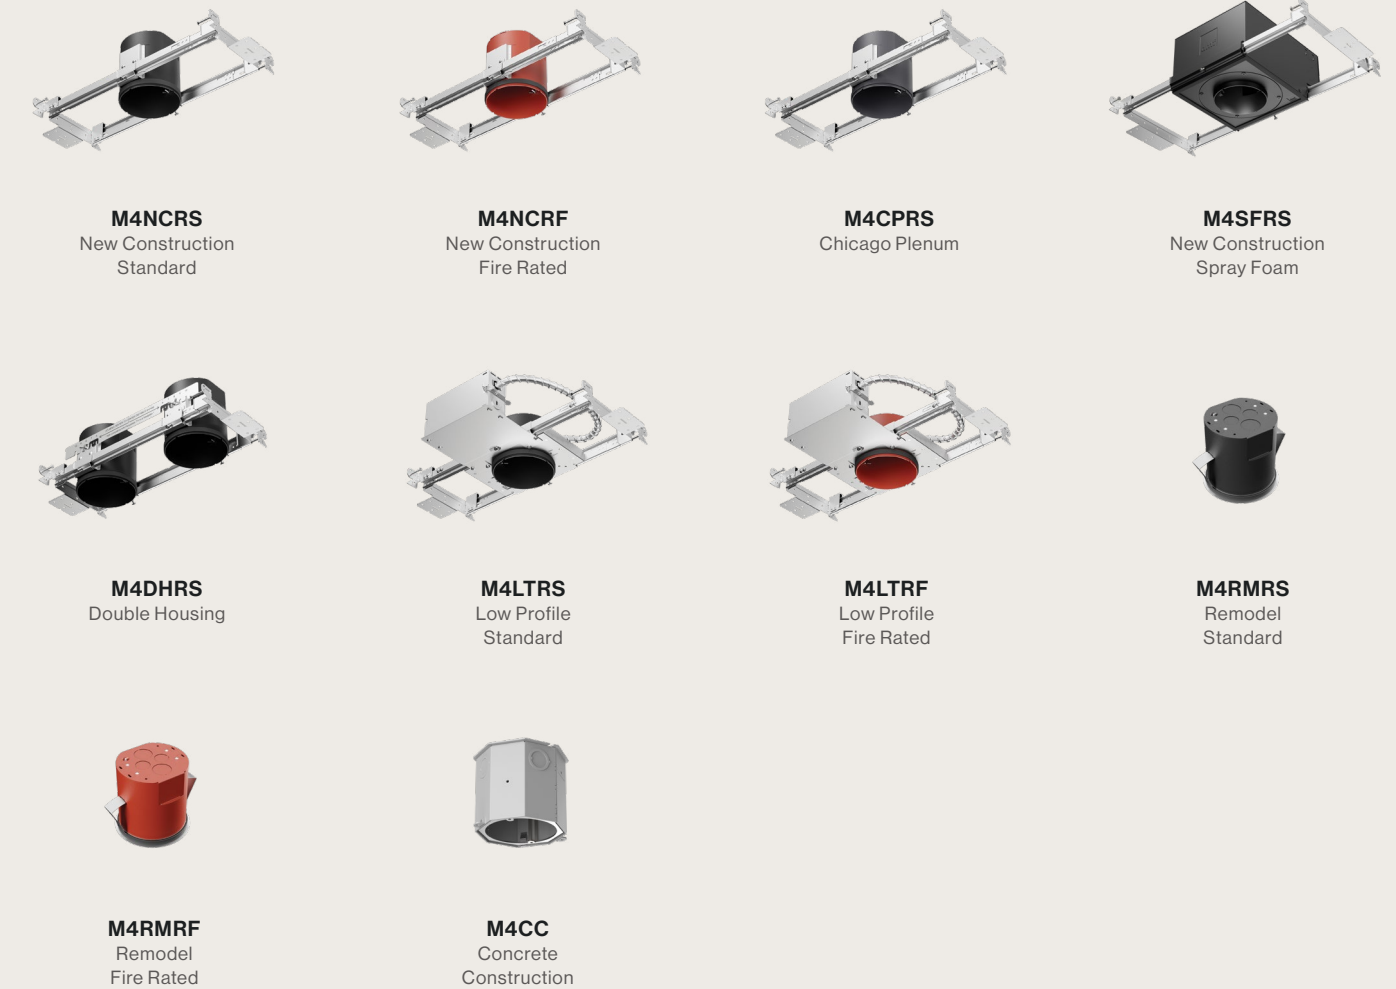


Accessories

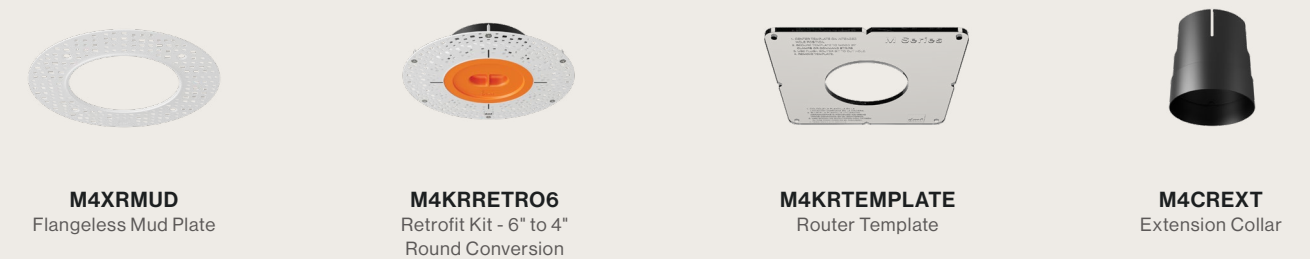


Artafex 4 Adjustable *Square*

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS


Trims

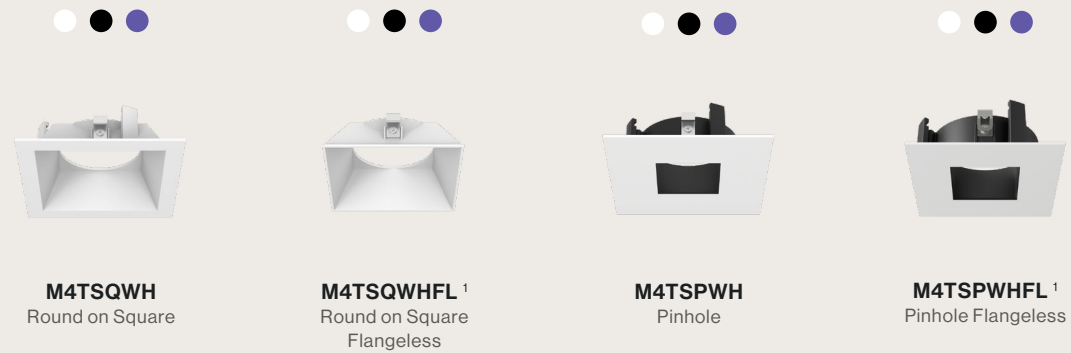

Housings


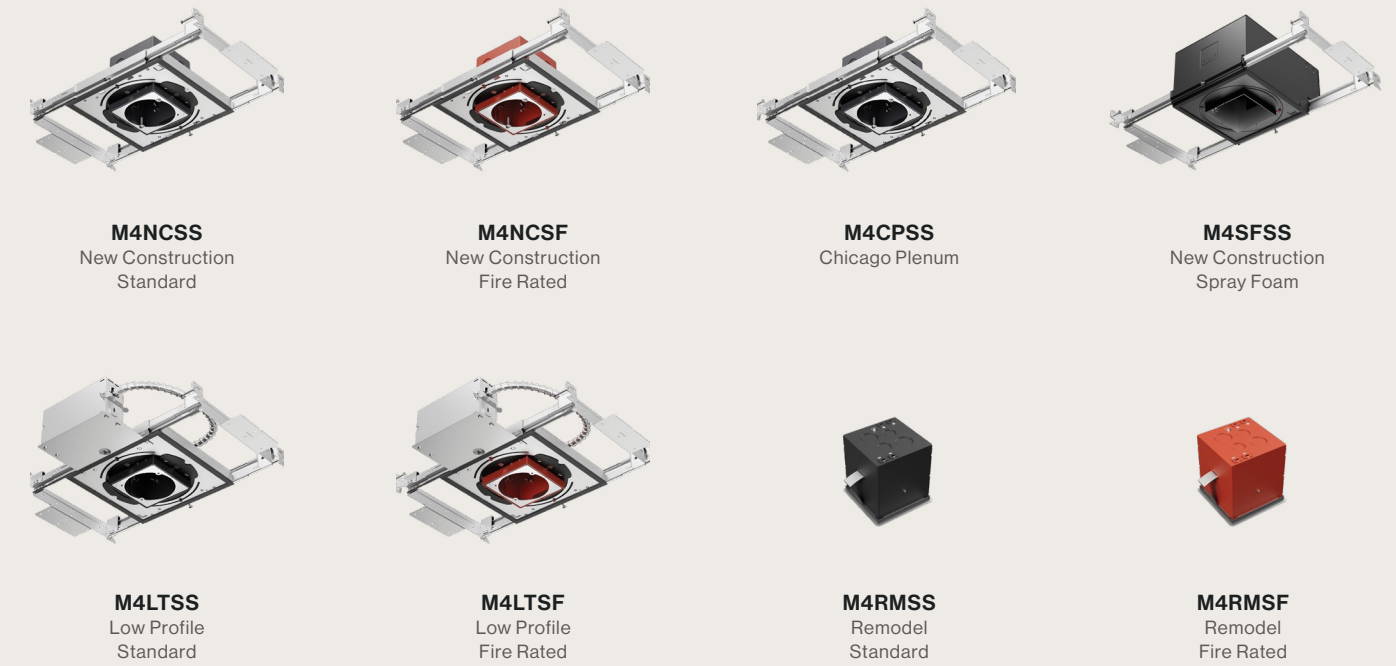


Accessories

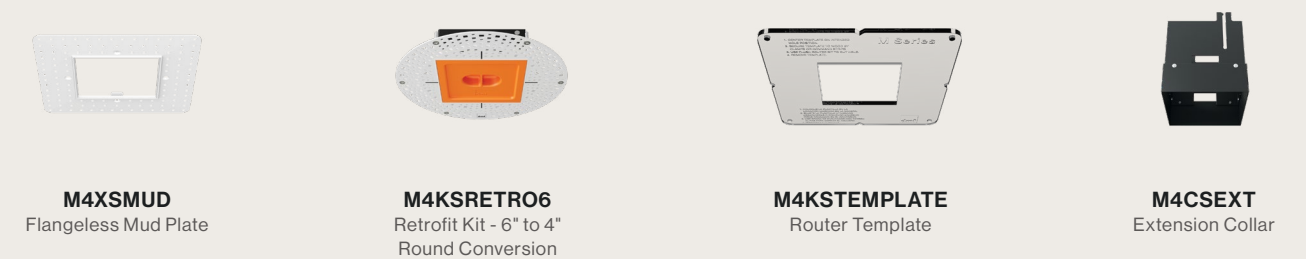

Classic Retrofit Trims

Trims

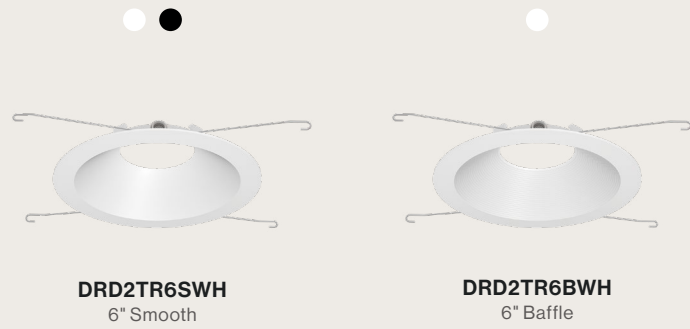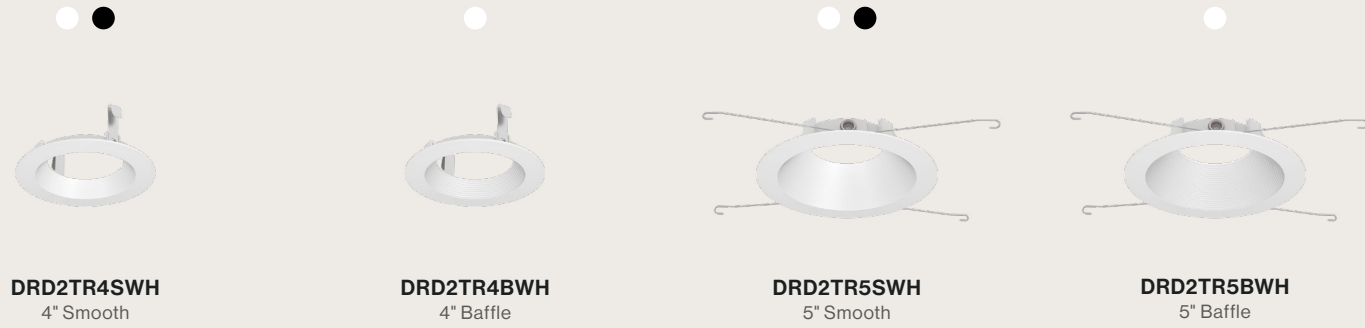

Accessories



Surface Mount Housing


Trims



Housings



Multiples Multi-Head Adjustable

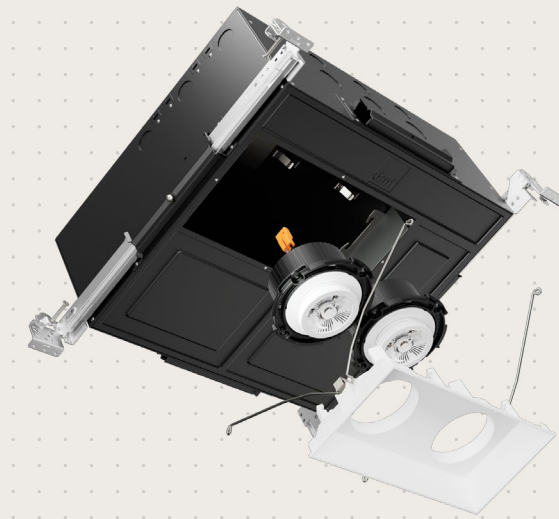

Highlight multiple focal points

These rectangular multiple options are based around our **Artafex 4** adjustable modules and maintain clean lines in the ceiling while providing maximum light output. Multi-directional adjustments with 360° directional aim and 45° tilt precisely highlights focal points throughout the interior. Featuring architectural trims that allow for up to 3 openings in one seamless piece.

Installation

Aperture
4"

Ceiling Thickness
New Construction: 1/2" up to 1 3/4"

Ceiling Material
Drywall, Millwork

Light Output & Distribution

Module
Adjustable: 360° directional aim, 45° tilt

Lumens (Power)
Per Head: 750 lm (9.5W), 1000 lm (12.5W),

Color Quality
True Spectrum®

Specialty Lens
Hexcell Louver

Color Temperature

- 2700K ● 3000K
- 3500K ● 4000K
- Warm Dim (3000K-1800K)
- Tunable White (4000K-1800K)

Trims

Shape
Square, Rectangular

Style
Standard, Flangeless

Finish
White, Black, Custom Color

Power & Controls

Input Voltage
120/277V

Dimming
PhaseX (0.1%), DALI-2 (0.1%)
TRIAC/ELV (1%) 120V only

Beam Spread


- ▲ Narrow Spot (15°)
- ▲ Spot (25°)
- ▲ Flood (40°)
- ▲ Linear Spread (60°x30°)
- △ Soft Focus



Multiples Multi-Head Adjustable

FOR COMPLETE ORDERING INFORMATION PLEASE REFERENCE PRODUCT SPEC SHEETS


Trims

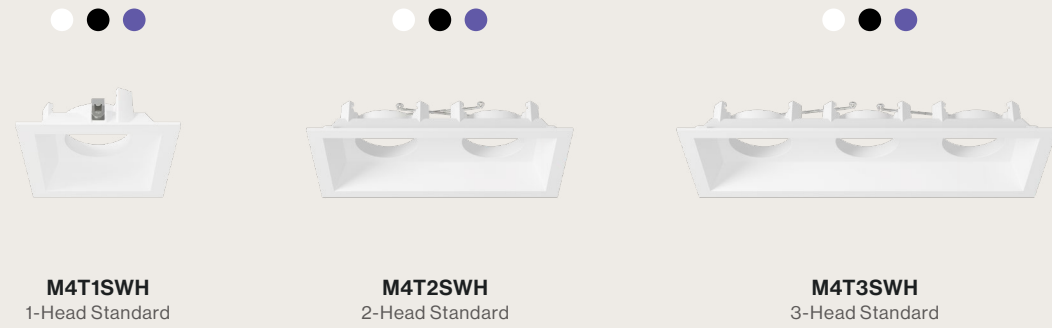

M4T1SWH
1-Head Standard

M4T2SWH
2-Head Standard

M4T3SWH
3-Head Standard

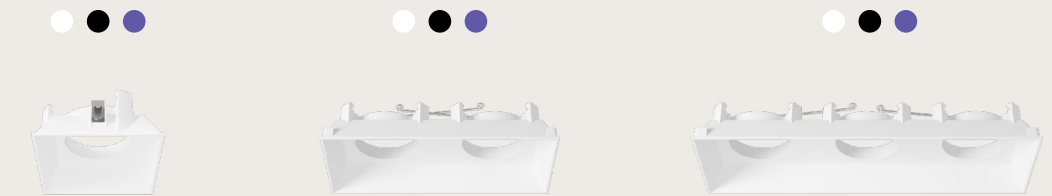


M4T1SWHFL¹
1-Head Flangeless

M4T2SWHFL¹
2-Head Flangeless

M4T3SWHFL¹
3-Head Flangeless

Housings

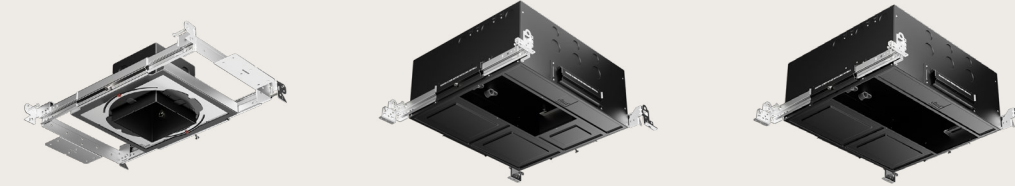

M4NCS1S
New Construction
1-Head

M4NCS2S
New Construction
2-Head

M4NCS3S
New Construction
3-Head

Accessories



M4XSMUD
1-Head Flangeless
Mudplate

M4XS2MUD
2-Head Flangeless
Mudplate

M4XS3MUD
3-Head Flangeless
Mudplate

Surface Mount




Surface meets *substance*

The **DRD5S Surface Mount** delivers clean, uniform illumination that redefines the potential of surface-mount lighting. This compact surface-mount solution brings the sophistication of high-end recessed downlight systems to utility spaces and ceilings with limited plenum space.



Surface Mount 4" Round & Square

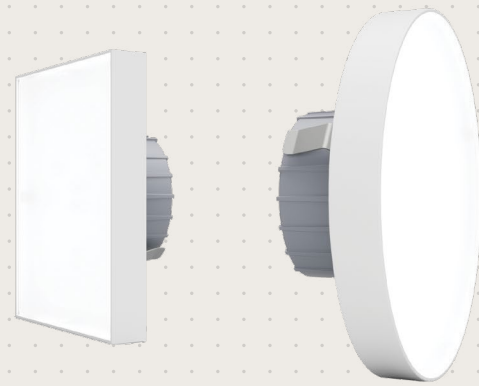

Installation

Application
New Construction, Retrofit

Ceiling Material
Drywall, Millwork

Mount
Surface Mount

Finish

Shape
4" Round, 4" Square

Finish
White

Light Output & Distribution

Lumens (Power)
750lm (9.0W), 1000 lm (12.0W)

Color Quality
90+ CRI, < 3-step SDCM

Power & Controls

Input Voltage
120/277V for 0-10V only

Dimming
0-10V (1%)
TRIAC/ELV (5%) *120V only*

Color Temperature

2700K 3000K
3500K

Beam Spread

General
(90°+)

Surface Mount 8" Round



Installation

Application
New Construction, Retrofit

Ceiling Material
Drywall, Millwork

Mount
Surface Mount

Finish

Shape
8" Round

Finish
White

Light Output & Distribution

Lumens (Power)
1500 lm (17W)

Color Quality
90+ CRI, < 3-step SDCM

Power & Controls

Input Voltage
120/277V

Dimming
0-10V (1%)
TRIAC/ELV (5%)

Color Temperature

2700K 3000K
3500K

Beam Spread

General
(90°+)

Surface Mount 18" Linear



Installation

Application
New Construction, Retrofit

Ceiling Material
Drywall, Millwork

Mount
Surface Mount

Finish

Shape
18" x 4" Rectangle

Finish
White

Light Output & Distribution

Lumens (Power)
1500 lm (17W)

Color Quality
90+ CRI, < 3-step SDCM

Power & Controls

Input Voltage
120/277V

Dimming
0-10V (1%)
TRIAC/ELV (5%)

Color Temperature


2700K 3000K
3500K

Beam Spread

General
(90°+)

Surface Mount Installation

Housings

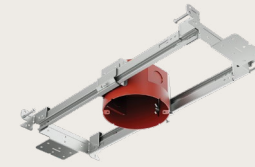

F4NC
New Construction
Fire Rated

Compatible Junction Boxes

JUNCTION BOX	MIN. DEPTH	MIN. VOLUME	THROUGH-WIRE RATING
4O Octagonal (metallic)	2 1/8 in	21.5 in ³	6 (three in, three out) #12 AWG
3O Round (non-metallic)	2 3/4 in	18 in ³	6 (three in, three out) #12 AWG
4O Round (non-metallic)	2 3/16 in	20 in ³	6 (three in, three out) #12 AWG

Artafex 2

Downlight

Artafex 2

Adjustable

Artafex 4

Downlight

Artafex 4

Adjustable

Surface Mount

application

New Construction, Remodel, Retrofit

New Construction, Remodel, Retrofit

New Construction, Remodel, Retrofit

New Construction, Remodel, Retrofit

New Construction, Retrofit

housing

Artafex Flangeless; X Series

Artafex Flangeless; X Series

M Series; Surface Mount; 4", 5", 6" Retrofit

M Series; Multiples

Surface Mount; Metallic Octagonal; or Non-Metallic Round Junction Box

adjustment

–

360° directional aim, 35° tilt

–

360° directional aim, 45° tilt

–

lumens

750 lm (9.5W), 1000 lm (12.5W),
1250 lm (14.3W)

750 lm (12.5W), 1000 lm (14.3W)

750 lm (9.5W), 1000 lm (12.5W),
1250 lm (14.3W), 1500 lm (16.5W)

750 lm (9.5W), 1000 lm (12.5W)

4": 750 lm (9.0W), 1000 lm (12.0W)
8"/18": 1500 lm (17.0W)

color quality

True Spectrum®

True Spectrum®

True Spectrum®

True Spectrum®

90+ CRI, < 3-step SDCM

color temperature

2700K, 3000K, 3500K, 4000K,
Warm Dim (3000-1800K),
Tunable White (4000-1800K)

2700K, 3000K, 3500K, 4000K,
Warm Dim (3000-1800K),
Tunable White (4000-1800K)

2700K, 3000K, 3500K, 4000K,
Warm Dim (3000-1800K),
Tunable White (4000-1800K)

2700K, 3000K, 3500K, 4000K,
Warm Dim (3000-1800K),
Tunable White (4000-1800K)

2700K, 3000K, 3500K

dimming

PhaseX (0.1%), DALI-2 (0.1%)
TRIAC/ELV (1%) 120V only

PhaseX (0.1%), DALI-2 (0.1%)
TRIAC/ELV (1%) 120V only

PhaseX (0.1%), DALI-2 (0.1%)
TRIAC/ELV (1%) 120V only

PhaseX (0.1%), DALI-2 (0.1%)
TRIAC/ELV (1%) 120V only

0-10V (1%), TRIAC/ELV (5%),

beam spread

Ultra Narrow Spot (10°), Narrow Spot (20°),
Spot (30°), Flood (40°), Wide Flood (50°),
Linear Spread (50°x30°)

Narrow Spot (20°), Spot (30°), Flood (40°),
Wide Flood (50°), Linear Spread (50°x30°)

Narrow Spot (15°), Spot (25°), Flood (40°),
Wide Flood (60°), General (90°+),
Linear Spread (40°x20°), Soft Focus

Narrow Spot (15°), Spot (25°), Flood (40°),
Linear Spread (60°x30°), Soft Focus

General (90°+)

options

-

Hexcell Louver

-

Hexcell Louver, White Surround

4" Round, 4" Square,
8" Round, 18" Linear

input voltage

120/277V

120/277V

120/277V

120/277V

4": 120V; 8"/18": 120/277V

standards

JA8 Title 24, UL Certified US-CA,
ENERGY STAR®, Declare

JA8 Title 24, UL Certified US-CA,
ENERGY STAR®, Declare

JA8 Title 24, UL Certified US-CA,
ENERGY STAR®, Declare

JA8 Title 24, UL Certified US-CA,
ENERGY STAR®, Declare

JA8 Title 24, UL Certified US-CA,
ENERGY STAR®, Declare

ratings

Wet Location

Damp Location

Wet Location

Damp Location

Wet Location

dmf promise

Yes

Yes

Yes

Yes

–

dmf

DMF Lighting
1118 East 223rd Street
Carson, CA 90745

323.934.7779
info@dmfLuxury.com

dmfLuxury.com